




RoHS Compliance

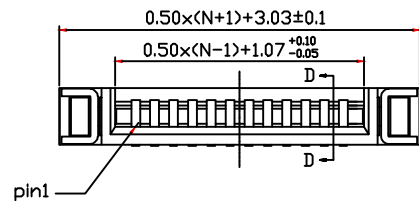





Material
Housing: NYLON 46 UL94V-0
Contacts: Brass, Tin over Nickel
LEG: Brass, Tin over Nickel.

Electrical
Voltage Rating(Max.): 50V
Current Rating(Max.): 0.5A

Mechanical
Temp. Range: -40°C ~ +80°C

Order Information:
RHTAY242B-1.5-XX-T-R

Series No.
Height: 1.5mm
No. of pins (04~60 pins)
Type: T-SMT Pin
Pack: R-Reel T-Tube

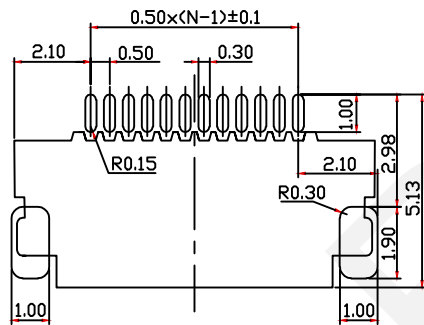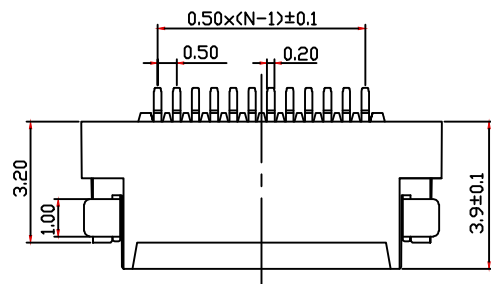

PCB Layout




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

CONN FFC 0.50mm,SMD,Horizontal,With ZIF



RHTAY242B-1.5-XX-T-R