





RoHS Compliance

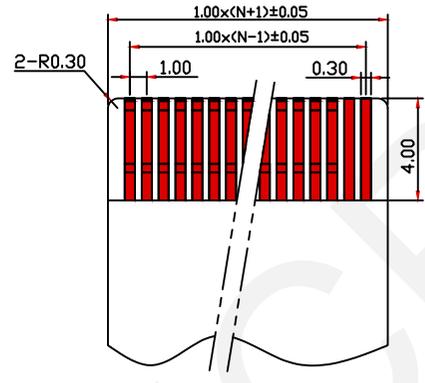

Section:A-A

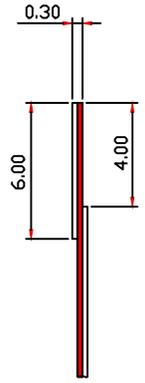





Proper Cable

Material
 Housing:LCP, UL94V-0
 Actuator:LCP,UL94V-0
 Contacts:Copper Alloy, Tin Over Nickel
 PEG:Copper Alloy, Tin Over Nickel

Electrical
 Voltage Rating: 50 V
 Current Rating: 0.3 A

Mechanical
 Temp.Range:-25°C~+85°C

Order Information:
 RHTAY40N-1.5-XX-T-L-R

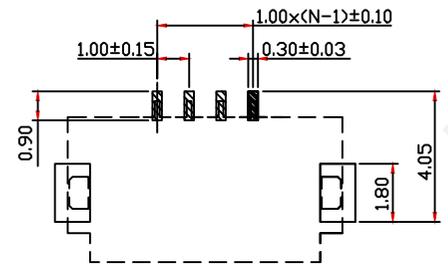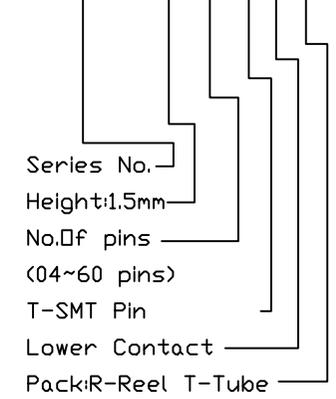

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	CONN FFC 1.00mm,SMD,Horizontal, Lower Contact,With ZIF	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAY40N-1.5-XX-T-L-R

