
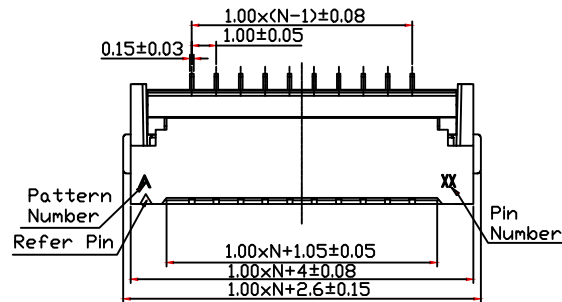


PCB Layout

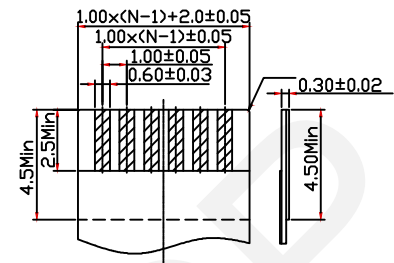





Proper Cable

Material  
Housing: Thermoplastic , UL94V-0  
Cover: Thermoplastic, UL94V-0  
Terminal: Phosphor Bronze  
Stator: Brass

Electrical  
Voltage Rating: 50 V  
Current Rating: 0.5 A  
Withstand Voltage: 250 V  
Insulation Resistance: 500MΩ.Min  
Contact Resistance: 30 mΩ.Max.

Mechanical  
Temp Range: -40℃~+85℃

Order Information  
RHTAY40Q-2.0-XX-T-R

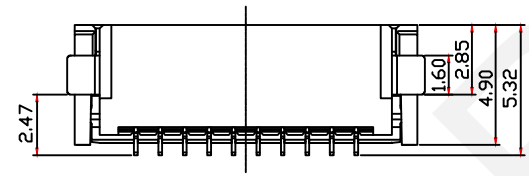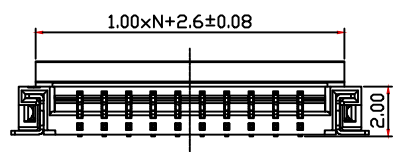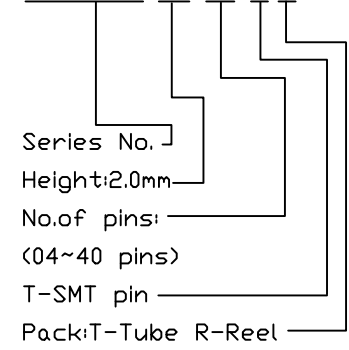

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

|          |                |           |             |                                         |                                                                                                                 |
|----------|----------------|-----------|-------------|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN | CONN FFC 100mm,SMD,Horizontal, With ZIF |                                                                                                                 |
| 0~3      | 3~18           | 18~50     | 50~120      | CHK'D BY FENG                           | THIRD ANGLE PROJECTION<br> |
| ±0.12    | ±0.15          | ±0.3      | ±0.5        | APPR BY ZHAN                            |                                                                                                                 |