
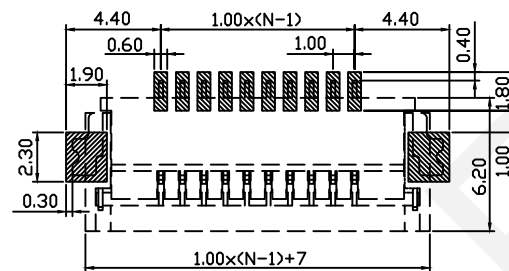




Cable Insert Dim

Proper Cable

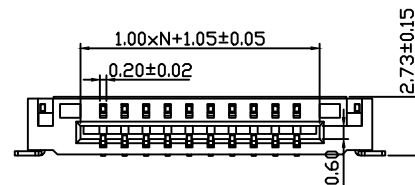

PCB Layout

Material

Housing: Thermoplastic , UL94V-0

Actuator: Thermoplastic, UL94V-0

Terminal: Phosphor Bronze

Bitting Nail-Brass

Electrical

Voltage Rating: 50 V

Current Rating: 0.5 A

Withstand Voltage: 500 V

Insulation Resistance: 500MΩ.Min

Contact Resistance: 30 mΩ.Max.

Mechanical

Temp Range: -25℃~+85℃

Order Information

RHTAY40S-2.7-XX-T-R

Series No.]

Height: 2.7mm

No. of pins:

(04~37 pins)

T-SMT pin

Pack: T-Tube R-Reel

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 100mm,SMD,Horizontal, With ZIF

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY40S-2.7-XX-T-R

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9