


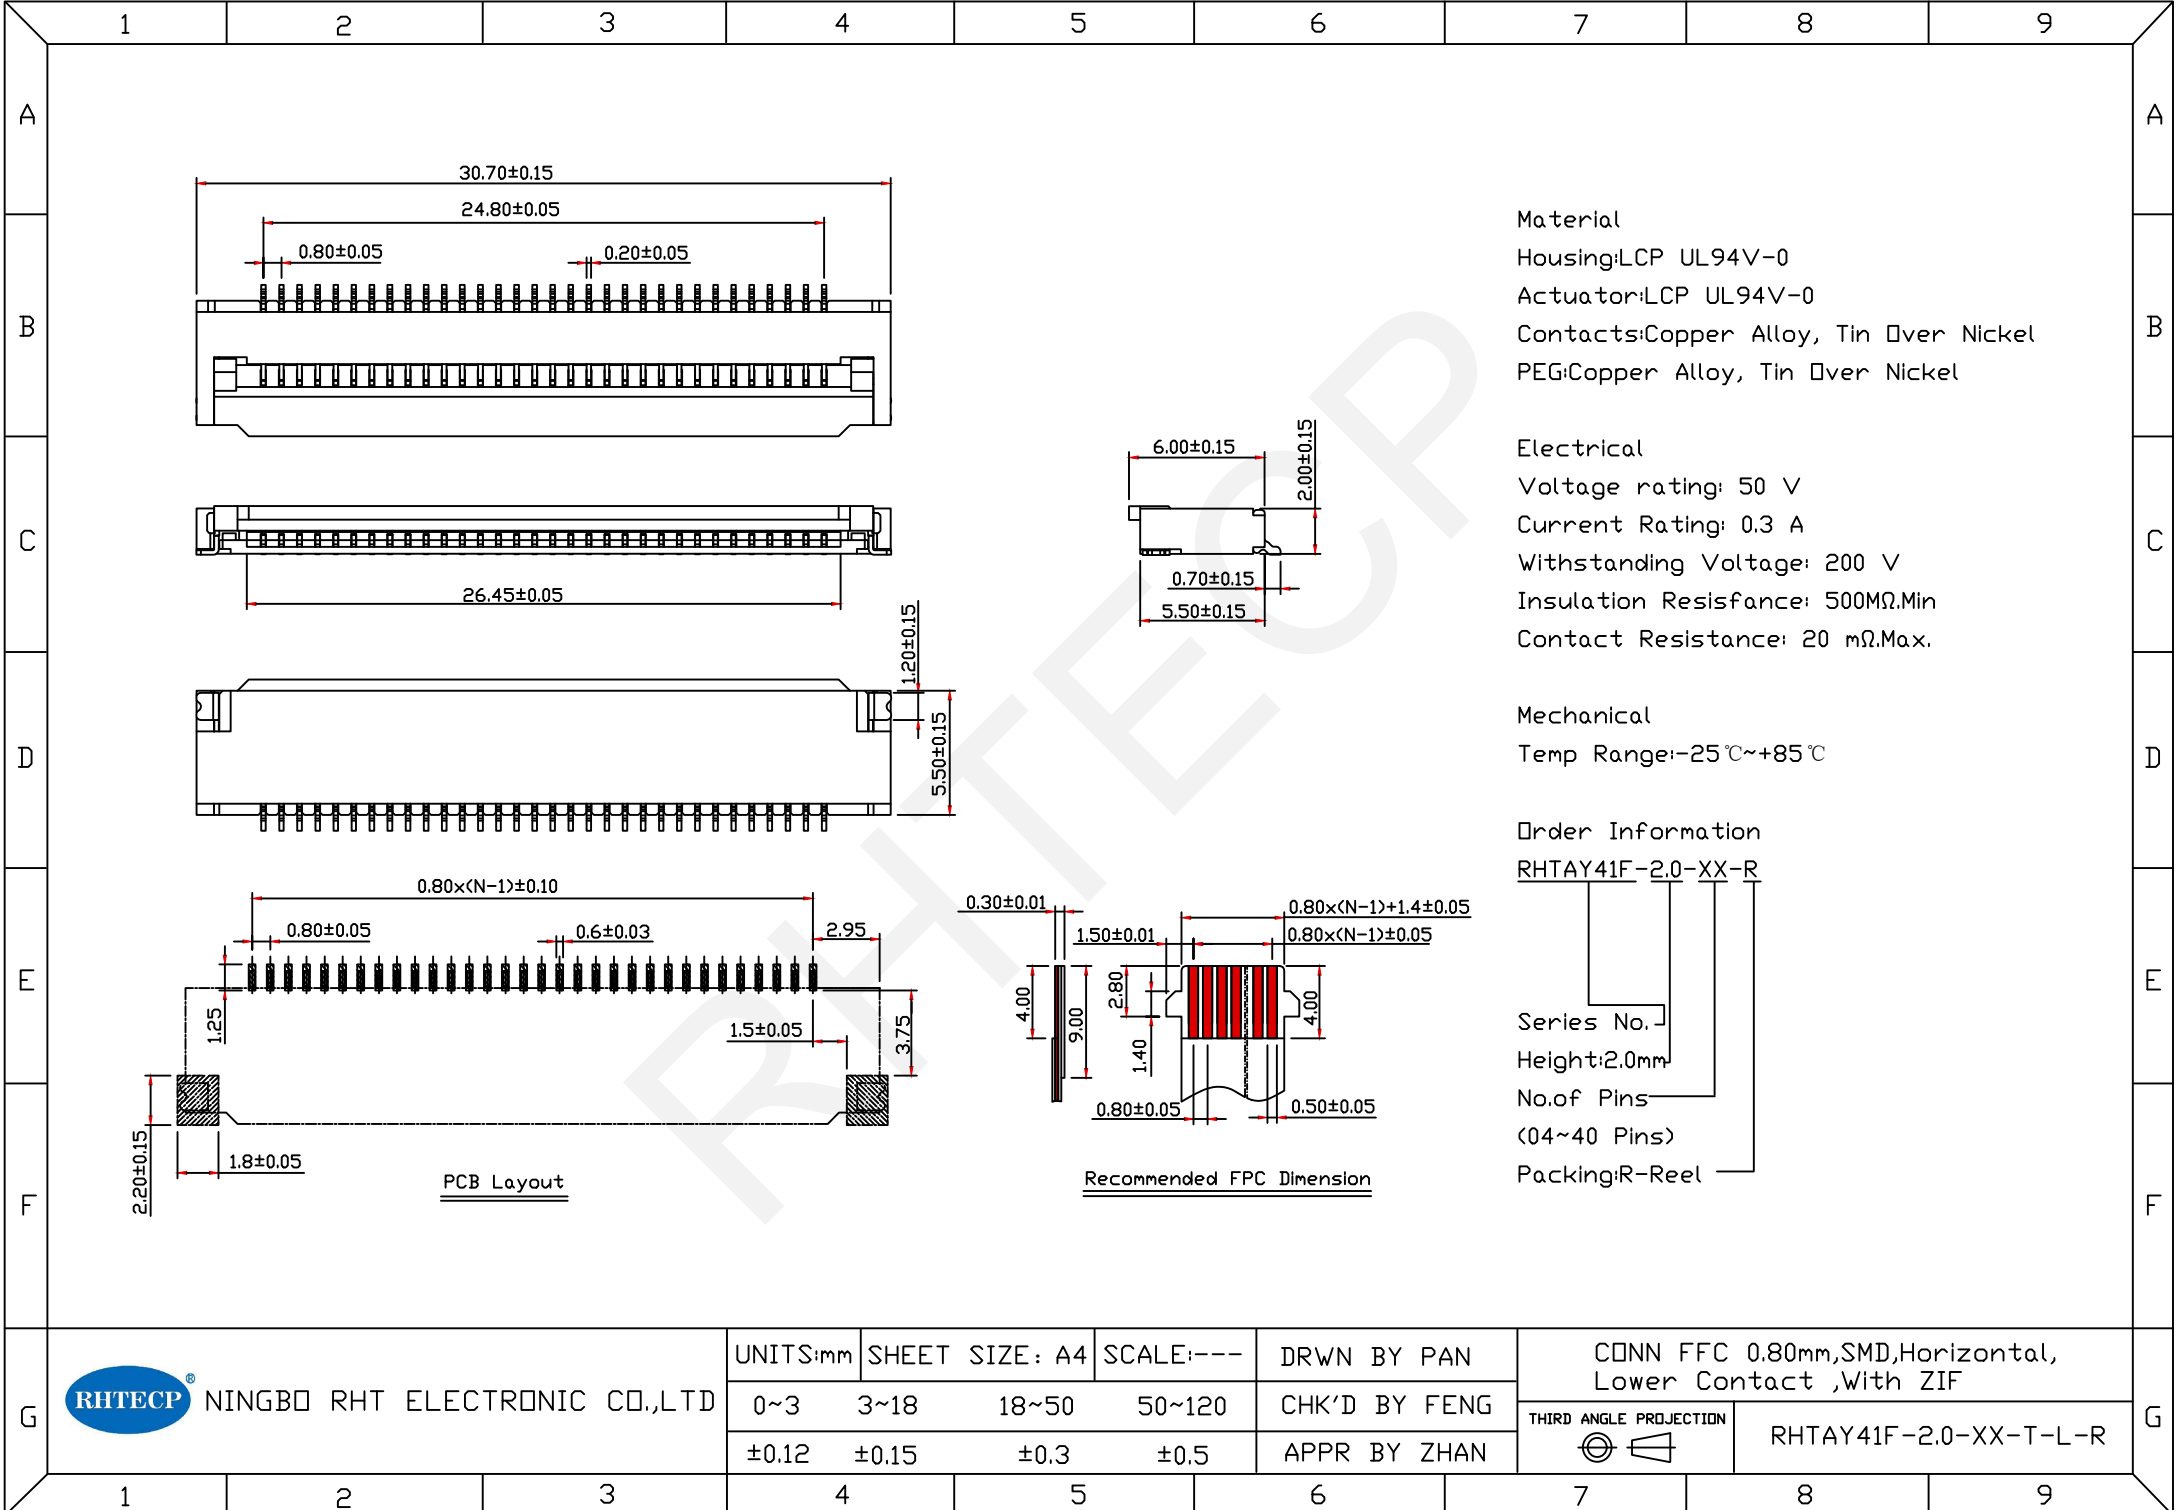

Material
Housing:LCP UL94V-0
Actuator:LCP UL94V-0
Contacts:Copper Alloy, Tin Over Nickel
PEG:Copper Alloy, Tin Over Nickel

Electrical
Voltage rating: 50 V
Current Rating: 0.3 A
Withstanding Voltage: 200 V
Insulation Resistance: 500MΩ.Min
Contact Resistance: 20 mΩ.Max.

Mechanical
Temp Range:-25℃~+85℃

Order Information

RHTAY41F-2.0-XX-R

Series No.
Height:2.0mm
No.of Pins
(04~40 Pins)
Packing:R-Reel

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120			CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5			APPR BY ZHAN

CONN FFC 0.80mm,SMD,Horizontal, Lower Contact ,With ZIF	
THIRD ANGLE PROJECTION	RHTAY41F-2.0-XX-T-L-R