


PCB Layout

Proper Cable

Material  
 Housing:LCP UL94V-0  
 Lock:LCP UL94V-0  
 Plug spring:Phosphor Bronze,Gold/Tin  
 Soldering:Phosphor Bronze,Gold/Tin  
 Electrical  
 Voltage Rating: 50 V  
 Current Rating: 0.4 A  
 Withstanding Voltage: 500 V  
 Insulation Resistance: 500MΩ.Min.  
 Contact Resistance: 20 mΩ.max,  
 Mechanical  
 Temp.Range:-25°C~+85°C

Order Information







RHTAT42E-4.7-XX-T-P-R

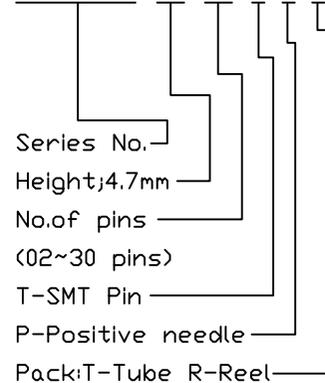


**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 1.00mm,Positive Needle,  
 SMD, Vertical,With ZIF  
 THIRD ANGLE PROJECTION  
 RHTAY42E-4.7-XX-T-P-R

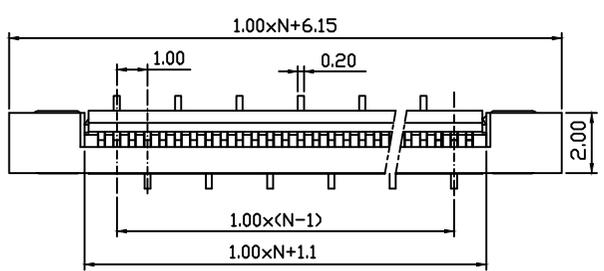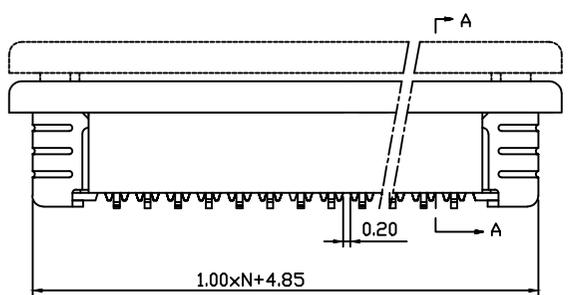

Proper Cable

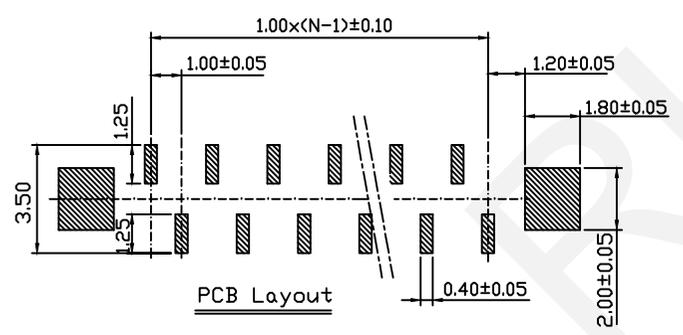


PCB Layout

Material  
 Housing:LCP UL94V-0  
 Lock:LCP UL94V-0  
 Plug spring:Phosphor Bronze,Gold/Tin  
 Soldering:Phosphor Bronze,Gold/Tin  
 Electrical  
 Voltage Rating: 50 V  
 Current Rating: 0.4 A  
 Withstanding Voltage: 500 V  
 Insulation Resistance: 500MΩ.Min.  
 Contact Resistance: 20 mΩ.max,  
 Mechanical  
 Temp.Range:-25°C~+85°C


Order Information

RHTAT42E-4.7-XX-T-A-R

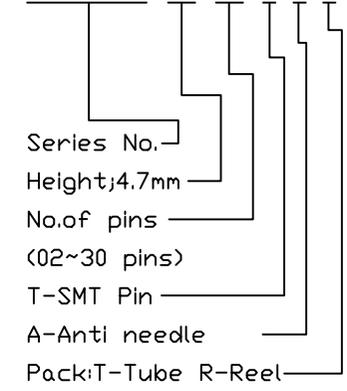

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	CONN FFC 1.00mm,Anti Needle, SMD, Vertical,With ZIF	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAY42E-4.7-XX-T-A-R



RHTAY42E-4.7-XX-T-A-R