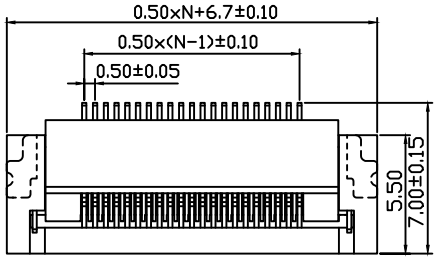


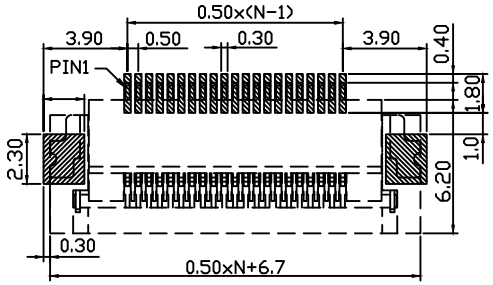


PCB Layout




CABLE INSERT DIM.

Material

Housing:HIGH-TEMP Thermoplastic,UL94V-0

Actuator:HIGH-TEMP Thermoplastic, UL94V-0

Terminal:Phosphor bronze ,Gold/Tin

Fitting Nail:Brass,Matte-Tin or Tin

Electrical

Voltage rating: 50 V

Insulation Resistance: 500MΩ.Min

Contact Resistance: 30 mΩ.Max.

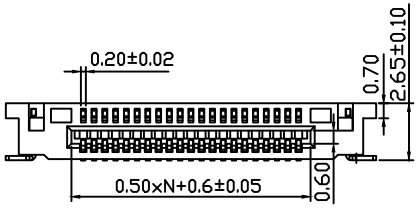








Mechanical

Temp Range:-25℃~+85℃

Order Information

RHTAY42Q-2.6-XX-T-R

Series No.

Height:2.60mm

No.of pins:

(04~61pins)

T-SMT Pin

Pack:T-Tube R-Reel




Proper Cable

RHTECP

| | | | | | |
|---|---|---|---|---|---|
| RHTECP NINGBO RHT ELECTRONIC CO.,LTD | UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN | CONN FFC 0.50mm,SMD,Horizontal,With ZIF |
| | 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG |
| | ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN |
| | THIRD ANGLE PROJECTION | | | | RHTAY42Q-2.6-XX-T-R |