





Recommended FPC Dimension



SECTION A-A
SCALE 2:1

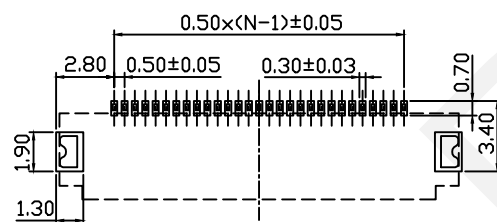

PCB Layout

Material

Housing: Thermoplastic High Temp, UL94V-0
Latch: Thermoplastic High Temp, UL94V-0
Fitting Nail: Copper Alloy, matt Tin Overall.
Terminal: Copper Alloy, Au/matt Tin Overall.

Electrical

Voltage rating: 50 V
Insulation Resistance: 500MΩ.Min
Contact Resistance: 30 mΩ.Max.

Mechanical

Temp Range: -25℃~+85℃

Order Information

RHTAY42S-1.2-XX-T-L-R

Series No.

Height: 1.2mm

No. of pins: 6P 8P

10P, 12P, 13P, 20P, 22P, 24P

26P, 28P, 30P, 40P, 50P, 60P

T-SMT Pin

L-Lower Contact

Pack: T-Tube R-Reel

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 0.50mm,SMD,Horizontal,
Lower Contact ,With ZIF

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY42S-1.2-XX-T-L-R


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9