



PCB Layout



Proper Cable

Material

Insulator: Glass-Reinforced Thermoplastic

Contact: Copper Alloy, Tin/Lead Plated Over Nickel

Electrical

Current Rating: 0.5 A

Withstanding Voltage: 500 V

Insulation Resistance: 1000MΩ.Min

Contact Resistance: 30 mΩ.Max.

Mechanical

Temp Range: -55°C~+85°C

Order Information

RHTAY20B-XX-R-P

Series No. |

No. of pins: |

(04~36 pins)

R-Right Angle Pin

P-Positive Needle

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 1.25mm THR 90°,Positive Needle

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15




±0.3

±0.5



APPR BY ZHAN



RHTAY20B-XX-R-P

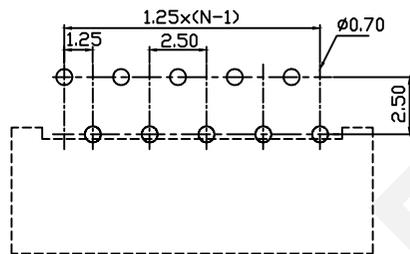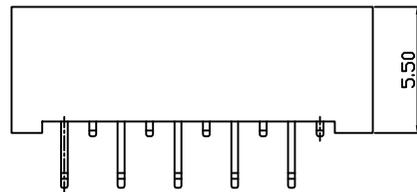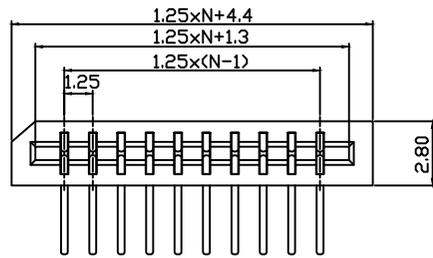

PCB Layout



Proper Cable

Material

Insulator: Glass-Reinforced Thermoplastic

Contact: Copper Alloy, Tin/Lead Plated Over Nickel

Electrical

Current Rating: 0.5 A

Withstanding Voltage: 500 V

Insulation Resistance: 1000M Ω .Min

Contact Resistance: 30 m Ω .Max.

Mechanical

Temp Range: -55 $^{\circ}$ C~+85 $^{\circ}$ C

Order Information

RHTAY20B-XX-R-A

Series No. |

No. of pins: |

(04~36 pins)

P-Positive Needle |

A-Anti Needle |

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 1.25mm THR 90°,Anti Needle

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY20B-XX-R-A

±0.12




±0.15

±0.3



±0.5

APPR BY ZHAN



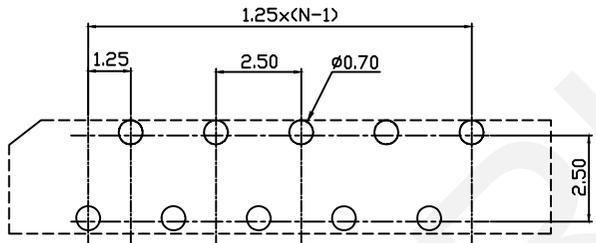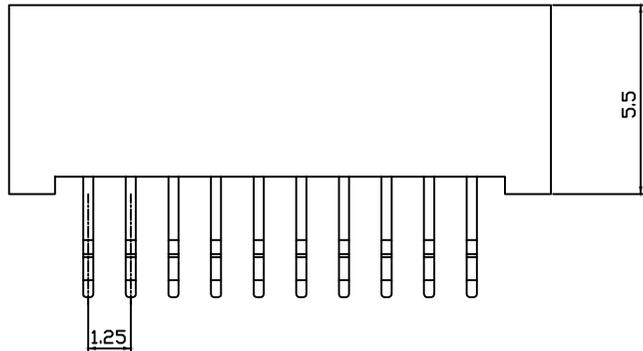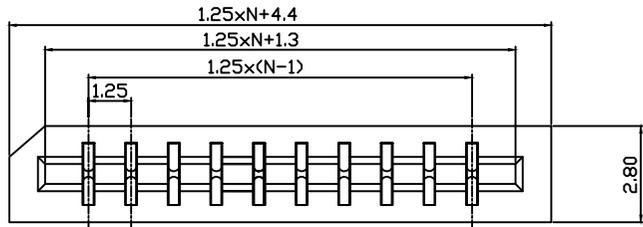

PCB Layout

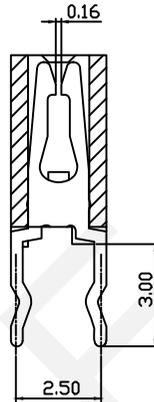

Proper Cable

Material

Insulator: Glass-Reinforced Thermoplastic

Contact: Copper Alloy, Tin/Lead Plated Over Nickel

Electrical

Current Rating: 0.5 A

Withstanding Voltage: 500 V

Insulation Resistance: 1000MΩ.Min

Contact Resistance: 30 mΩ.Max.

Mechanical

Temp Range: -55°C~+85°C

Order Information

RHTAY20B-XX-S-P

Series No.]




No. of pins:]

(04~36 pins)



S= Straight Pin]

P= Positive Needle]

G	NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	CONN FFC 1.25mm THR 180°,Positive Needle		
		0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 	RHTAY20B-XX-S-P
		±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		

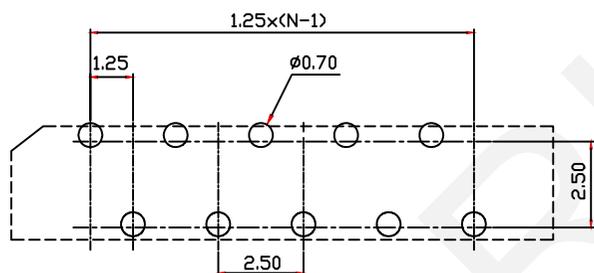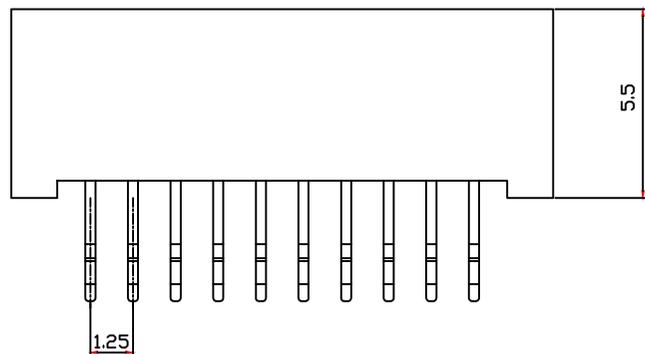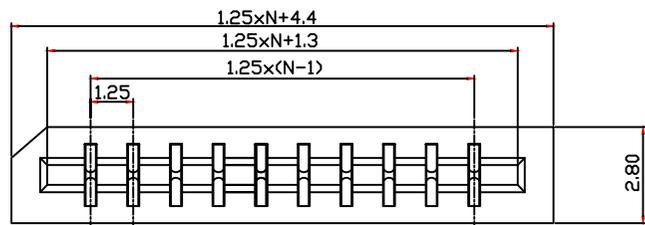

PCB Layout

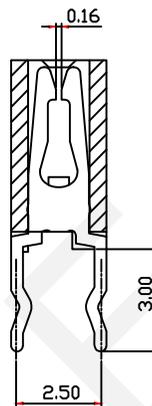

Proper Cable

Material

Insulator: Glass-Reinforced Thermoplastic

Contact: Copper Alloy, Tin/Lead Plated Over Nickel

Electrical

Current Rating: 0.5 A

Withstanding Voltage: 500 V

Insulation Resistance: 1000MΩ.Min

Contact Resistance: 30 mΩ.Max.

Mechanical

Temp Range: -55°C~+85°C

Order Information

RHTAY20B-XX-S-A

Series No.]

No. of pins:]

(04~36 pins)

S= Straight Pin

A= Anti Needle

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

CONN FFC 1.25mm THR 180°,Anti Needle

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15



±0.3

±0.5

APPR BY ZHAN



RHTAY20B-XX-S-A

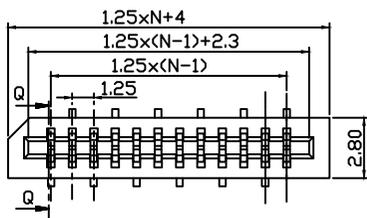

Q-Q SECTION

Material

Insulator: Glass-Reinforced Thermoplastic

Contact: Copper Alloy, Tin/Lead Plated Over Nickel

Electrical

Current Rating: 0.5 A



Withstanding Voltage: 500 V

Insulation Resistance: 1000MΩ.Min

Contact Resistance: 30 mΩ.Max.

Mechanical

Temp Range: -55°C~+85°C

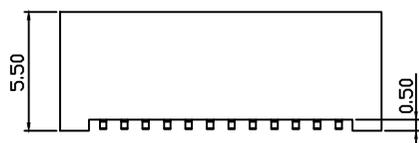

Order Information

RHTAY20B-XX-T-P-R

Series No. ↓


No. of pins: ↓

(04~36 pins)


T-SMT Pin ↓

P-Positive Needle ↓

Packing: T: Tube R: Reel ↓

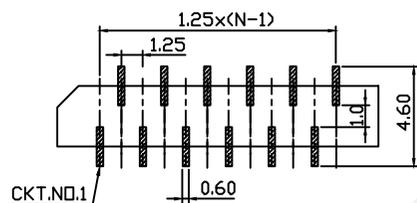

PCB Layout





Proper Cable

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	CONN FFC 1.25mm SMD Vertical, Positive Needle	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAY20B-XX-T-P-R



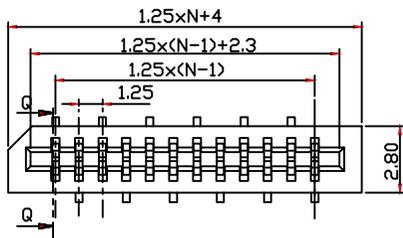

Q-Q SECTION

Material

Insulator: Glass-Reinforced Thermoplastic

Contact: Copper Alloy, Tin/Lead Plated Over Nickel

Electrical

Current Rating: 0.5 A



Withstanding Voltage: 500 V

Insulation Resistance: 1000MΩ.Min

Contact Resistance: 30 mΩ.Max.

Mechanical

Temp Range: -55°C~+85°C

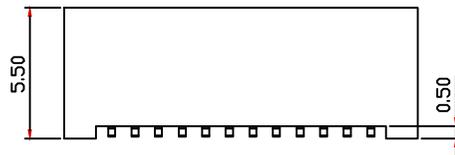

Order Information

RHTAY20B-XX-T-A-R

Series No. ↓


No. of pins: ↓

(04~36 pins)


T-SMT Pin ↓

A-Anti Needle ↓

Packing: T: Tube R: Reel ↓

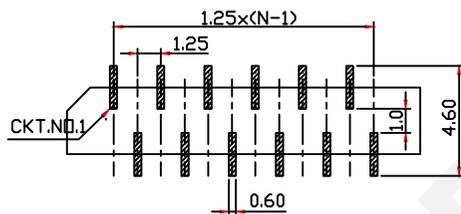

PCB Layout



Proper Cable

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

CONN FFC 1.25mm SMD
Vertical, Anti Needle

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY20B-XX-T-A-R