




OPEN TYPE

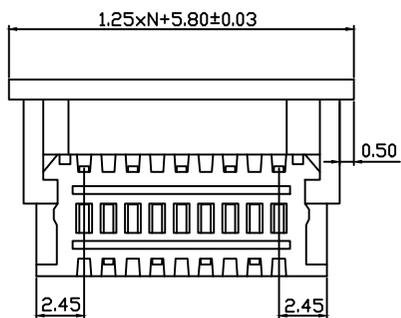

DETAIL A
CLOSE TYPE



PCB Layout



Proper Cable

Material
Housing:PBT UL94V-0
Terminal:Copper Alloy

Electrical
Voltage rating: 200 V
Current Rating:1A
Withstanding Voltage: 500 V
Insulation Resistance: 500M Ω .Min
Contact Resistance: 20 m Ω .Max.

Mechanical
Temp Range:-20 $^{\circ}$ C~+85 $^{\circ}$ C

Order Information
RHTAY20C-XX-R-P

Series No. |
No.of pins: |
(03~32 pins)
R-Right Angle Pin
P-Positive Needle



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	



CONN FFC 1.25mm THR 90°,
With ZIF,Positive Needle

THIRD ANGLE PROJECTION


RHTAY20C-XX-R-P

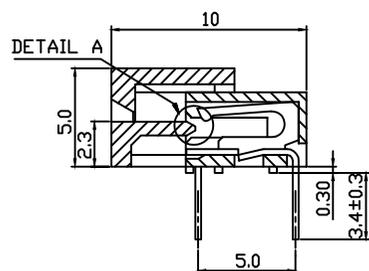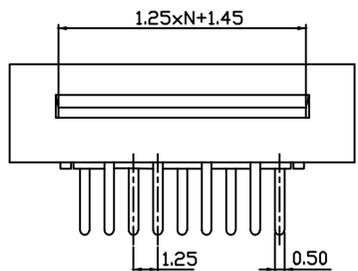


OPEN TYPE

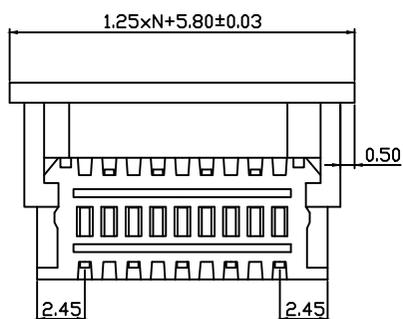

DETAIL A
CLOSE TYPE



Proper Cable



PCB Layout

Material
Housing:PBT UL94V-0
Terminal:Copper Alloy

Electrical
Voltage rating: 200 V
Current Rating:1A
Withstanding Voltage: 500 V
Insulation Resistance: 500MΩ.Min
Contact Resistance: 20 mΩ.Max.

Mechanical
Temp Range:-20℃~+85℃



Order Information
RHTAY20C-XX-R-A

Series No.
No.of pins:
(02~32 pins)
R-Right Angle Pin
A-Anti Needle



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	


CONN FFC 1.25mm THR 90°,Anti Needle
THIRD ANGLE PROJECTION
RHTAY20C-XX-R-A




OPEN TYPE

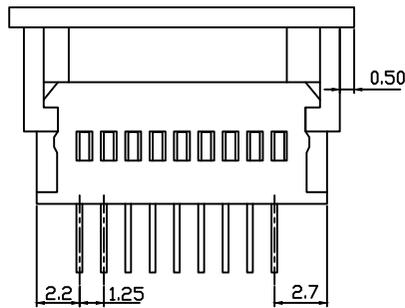

DETAIL A
CLOSE TYPE

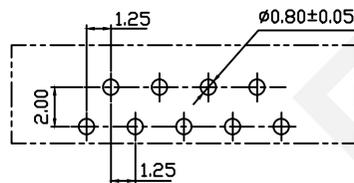

PCB Layout



Proper Cable

Material
Housing:PBT UL94V-0
Terminal:Copper Alloy

Electrical
Voltage rating: 200 V
Current Rating:1A
Withstanding Voltage: 500 V
Insulation Resistance: 500MΩ.Min
Contact Resistance: 20 mΩ.Max.

Mechanical
Temp Range:-20℃~+85℃

Order Information

RHTAY20C-XX-S-P

Series No. |

No.of pins: |

(03~32 pins)

S-Straight Pin

P-Positive Needle

RHTECP NINGBO RHT ELECTRONIC CO.,LTD



UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 1.25mm THR 180°,
With ZIF,Positive Needle



THIRD ANGLE PROJECTION



RHTAY20C-XX-S-P

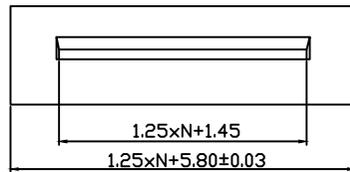

Material
Housing:PBT UL94V-0
Terminal:Copper Alloy

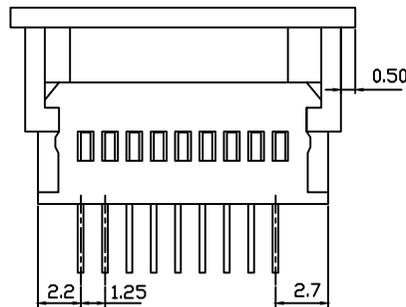

Electrical
Voltage rating: 200 V
Current Rating:1A
Withstanding Voltage: 500 V
Insulation Resistance: 500MΩ.Min
Contact Resistance: 20 mΩ.Max.

Mechanical
Temp Range:-20℃~+85℃

Order Information

RHTAY20C-XX-S-A


Series No. ↓

No.of pins: ↓


(03~32 pins)

S-Straight Pin ↓

A-Anti Needle ↓

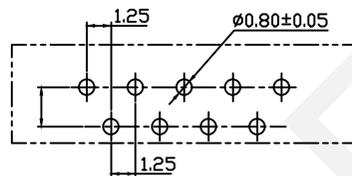

PCB Layout



Proper Cable

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 1.25mm THR 180°,
With ZIF,Anti Needle

THIRD ANGLE PROJECTION



RHTAY20C-XX-S-A