

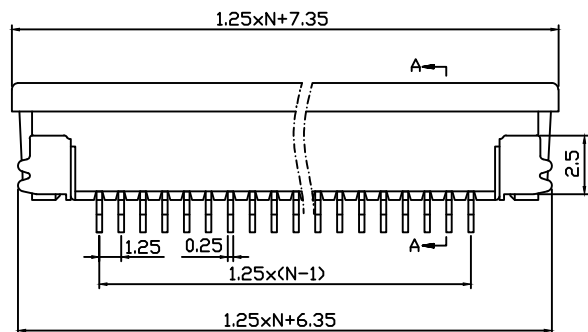




A-A

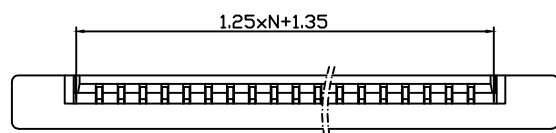

Proper Cable

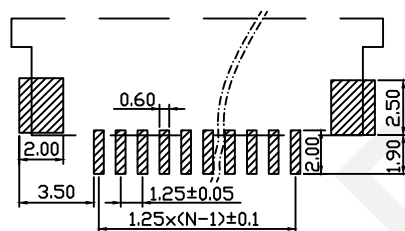

PCB Layout

Material

Housing: LCP UL94V-0

Lock: LLPUL94V-0

Plug spring: Phosphor Bronze, Gold/Tin

Soldering: Phosphor Bronze, Gold/Tin

Electrical

Voltage Rating: 50 V

Current Rating: 0.5 A

Withstand Voltage: 500 V

Insulation Resistance: 800MΩ.Min

Contact Resistance: 20 mΩ.Max.

Mechanical

Temp Range: -20℃~+85℃

Order Information

RHTAY20D-2.5-XX-T-U-R

Series No.:

Height: 2.5mm

No. of pins:

(04~35 pins)

T=SMT Pin

U=Upper Contact

Pack: T=Tube R=Reel

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5




APPR BY ZHAN

CONN FFC 1.25mm,SMD,
Upper Contact,With ZIF





THIRD ANGLE PROJECTION



RHTAY20D-2.5-XX-T-U-R

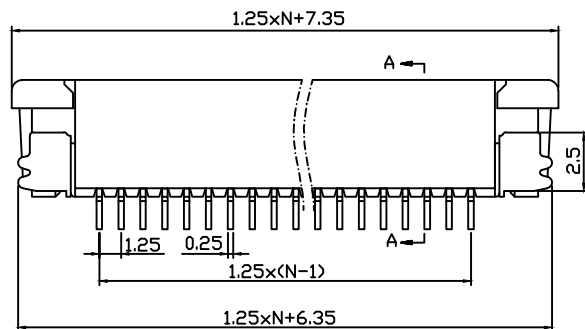

A-A

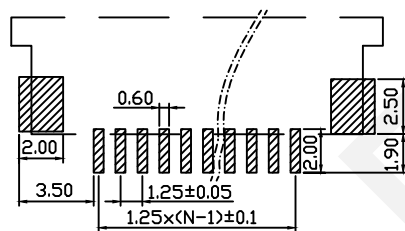

PCB Layout

Proper Cable

Material

Housing: LCP UL94V-0

Lock: LLPUL94V-0

Plug spring: Phosphor Bronze, Gold/Tin

Soldering: Phosphor Bronze, Gold/Tin

Electrical

Voltage Rating: 50 V

Current Rating: 0.5 A

Withstand Voltage: 500 V

Insulation Resistance: 800MΩ.Min

Contact Resistance: 20 mΩ.Max.

Mechanical

Temp Range: -20℃~+85℃

Order Information

RHTAY20D-2.5-XX-T-L-R

Series No.:

Height: 2.5mm

No. of pins:

(04~35 pins)

T=SMT Pin

L=Lower Contact

Pack: T=Tube R=Reel

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

CONN FFC 1.25mm, SMD,
Lower Contact, With ZIF

THIRD ANGLE PROJECTION



RHTAY20D-2.5-XX-T-L-R