


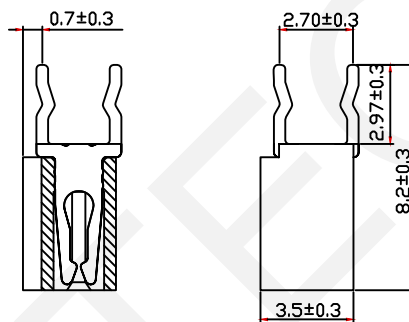



Proper Cable

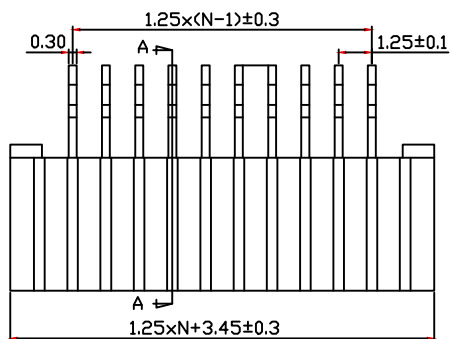

PCB Layout
Positive Needle



PCB Layout
Anti Needle

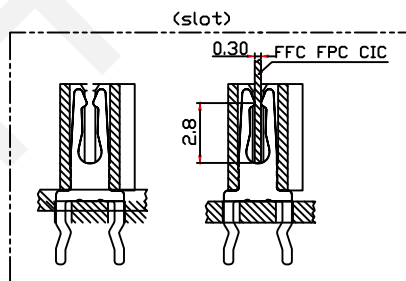

Material
Housing: PA9T , UL94V-0
Contact: Phosphor Bronze, Tin Plated

Electrical
Voltage Rating: 50 V
Current Rating: 0.5 A
Withstand Voltage: 200 V
Insulation Resistance: 800M Ω .Min
Contact Resistance: 40 m Ω .Max.

Mechanical
Temp Range: -25 $^{\circ}$ C~+85 $^{\circ}$ C

Order Information
RHTAY20G-XX-S-P

Series No.
No. of pins:
(04~33 pins)
S-Straight Pin
P-Positive Needle
A-Anti Needle

RHTECP[®] NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 1.25mm,THR180 $^{\circ}$

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTAY20G-XX-S-X