
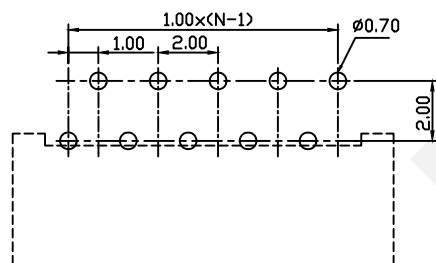



Proper Cable

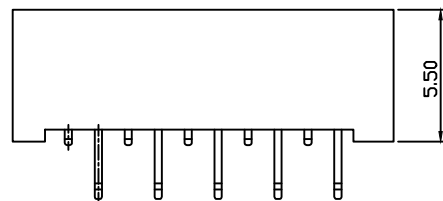

PCB LAYOUT

Material
Housing: PA9T, UL94V-0
Terminal: Phosphor Bronze

Electrical
Voltage Rating: 50 V
Current Rating: 0.4 A
Withstand Voltage: 200 V
Insulation Resistance: 500MΩ.Min
Contact Resistance: 20 mΩ.Max.

Mechanical
Temp Range: -25℃~+85℃

Order Information

RHTAY240B-XX-R-B-P T
Series No. J
No. of pins
(04~30 pins)
R-Right Angle Pin
B-Black
P-Positive needle
Pack: T-Tube

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.00mm Pitch FFC/FPC Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY240B-XX-R-B-PT


±0.12




±0.15

±0.3




±0.5

APPR BY ZHAN



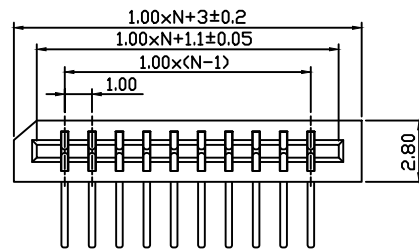

Proper Cable

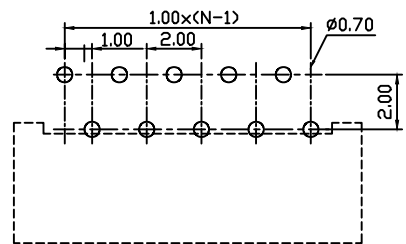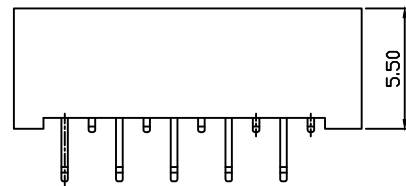

PCB LAYOUT

Material
Housing: PA9T, UL94V-0
Terminal: Phosphor Bronze

Electrical
Voltage Rating: 50 V
Current Rating: 0.4 A
Withstand Voltage: 200 V
Insulation Resistance: 500MΩ.Min
Contact Resistance: 20 mΩ.Max.

Mechanical
Temp Range: -25℃~+85℃

Order Information

RHTAY240B-XX-R-B-A T

Series No.]
No. of pins]
(04~30 pins)
R-Right Angle Pin]
B-Black]
A-Anti needle]
Pack: T-Tube]

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.00mm Pitch FFC/FPC Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15




±0.3

±0.5




APPR BY ZHAN



RHTAY240B-XX-R-B-AT

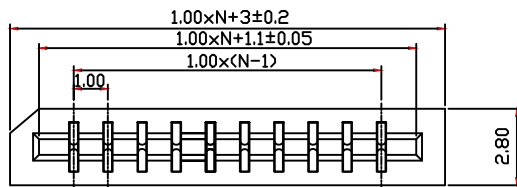

Proper Cable

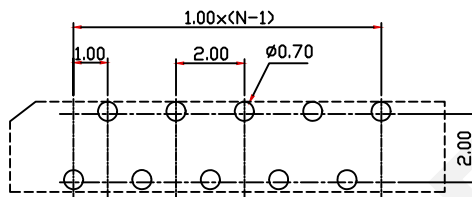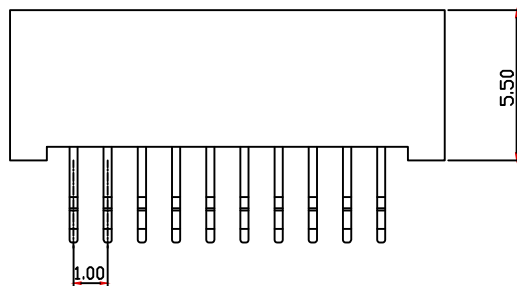

PCB LAYOUT

Material
Housing: PA9T, UL94V-0
Terminal: Phosphor Bronze

Electrical
Voltage Rating: 50 V
Current Rating: 0.4 A
Withstand Voltage: 200 V
Insulation Resistance: 500MΩ.Min
Contact Resistance: 20 mΩ.Max.

Mechanical
Temp Range: -25℃~+85℃

Order Information

RHTAY240B-XX-S-B-P T
Series No. J
No. of pins
(04~30 pins)
S-Straight Pin
B-Black
P-Positive needle
Pack: T-Tube

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.00mm Pitch FFC/FPC Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15




±0.3

±0.5




APPR BY ZHAN



RHTAY240B-XX-S-B-PT

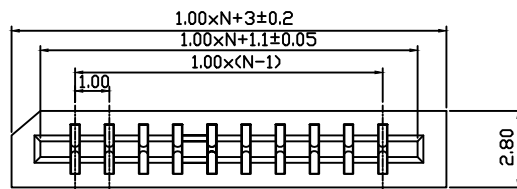

Proper Cable

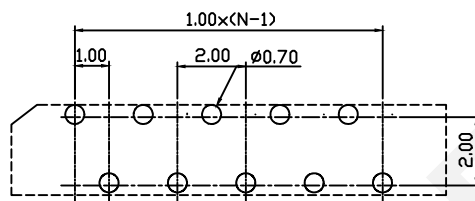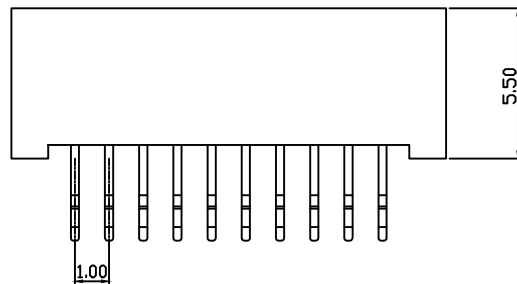

PCB LAYOUT

Material
Housing: PA9T, UL94V-0
Terminal: Phosphor Bronze

Electrical
Voltage Rating: 50 V
Current Rating: 0.4 A
Withstand Voltage: 200 V
Insulation Resistance: 500MΩ.Min
Contact Resistance: 20 mΩ.Max.

Mechanical
Temp Range: -25℃~+85℃

Order Information

RHTAY240B-XX-S-B-A T
Series No. J
No. of pins
(04~30 pins)
S-Straight Pin
B-Black
A-Anti Needle
Pack: T-Tube

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.00mm Pitch FFC/FPC Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15


±0.3

±0.5




APPR BY ZHAN




RHTAY240B-XX-S-B-AT

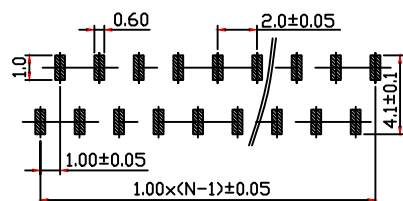

PCB LAYOUT

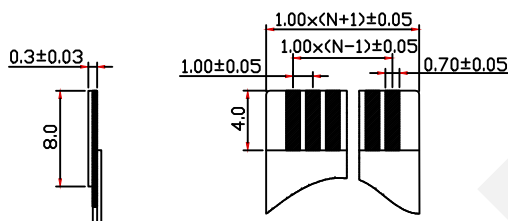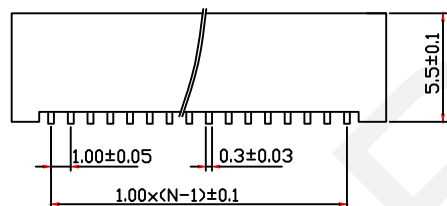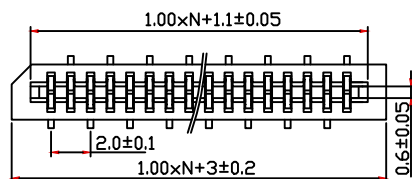

Proper Cable



Material
Housing: PA9T, UL94V-0
Terminal: Phosphor Bronze

Electrical
Voltage Rating: 50 V
Current Rating: 0.4 A
Withstand Voltage: 200 V
Insulation Resistance: 500MΩ.Min
Contact Resistance: 20 mΩ.Max.

Mechanical
Temp Range: -25℃~+85℃

Order Information

RHTAY240B-XX-T-B-P T
Series No. J
No. of pins (04~30 pins)
T-SMT Pin
B-Black
P-Positive needle
Pack: T-Tube

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.00mm Pitch FFC/FPC Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY240B-XX-T-B-PT


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4


5

6



7

8




9

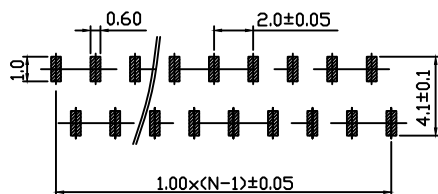

PCB LAYOUT



Proper Cable

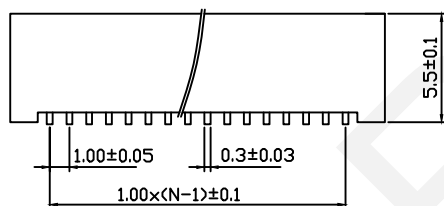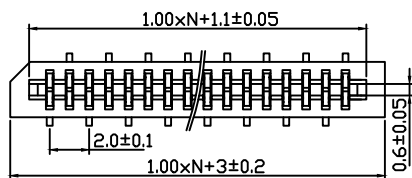

Material

Housing: PA9T, UL94V-0

Terminal: Phosphor Bronze

Electrical

Voltage Rating: 50 V

Current Rating: 0.4 A

Withstand Voltage: 200 V

Insulation Resistance: 500MΩ.Min

Contact Resistance: 20 mΩ.Max.

Mechanical

Temp Range: -25℃~+85℃

Order Information

RHTAY240B-XX-T-B-A T

Series No. J

No. of pins

(04~30 pins)

T-SMT Pin

B-Black

A-Anti Needle

Pack: T-Tube

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.00mm Pitch FFC/FPC Connector

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAY240B-XX-T-B-AT

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN