


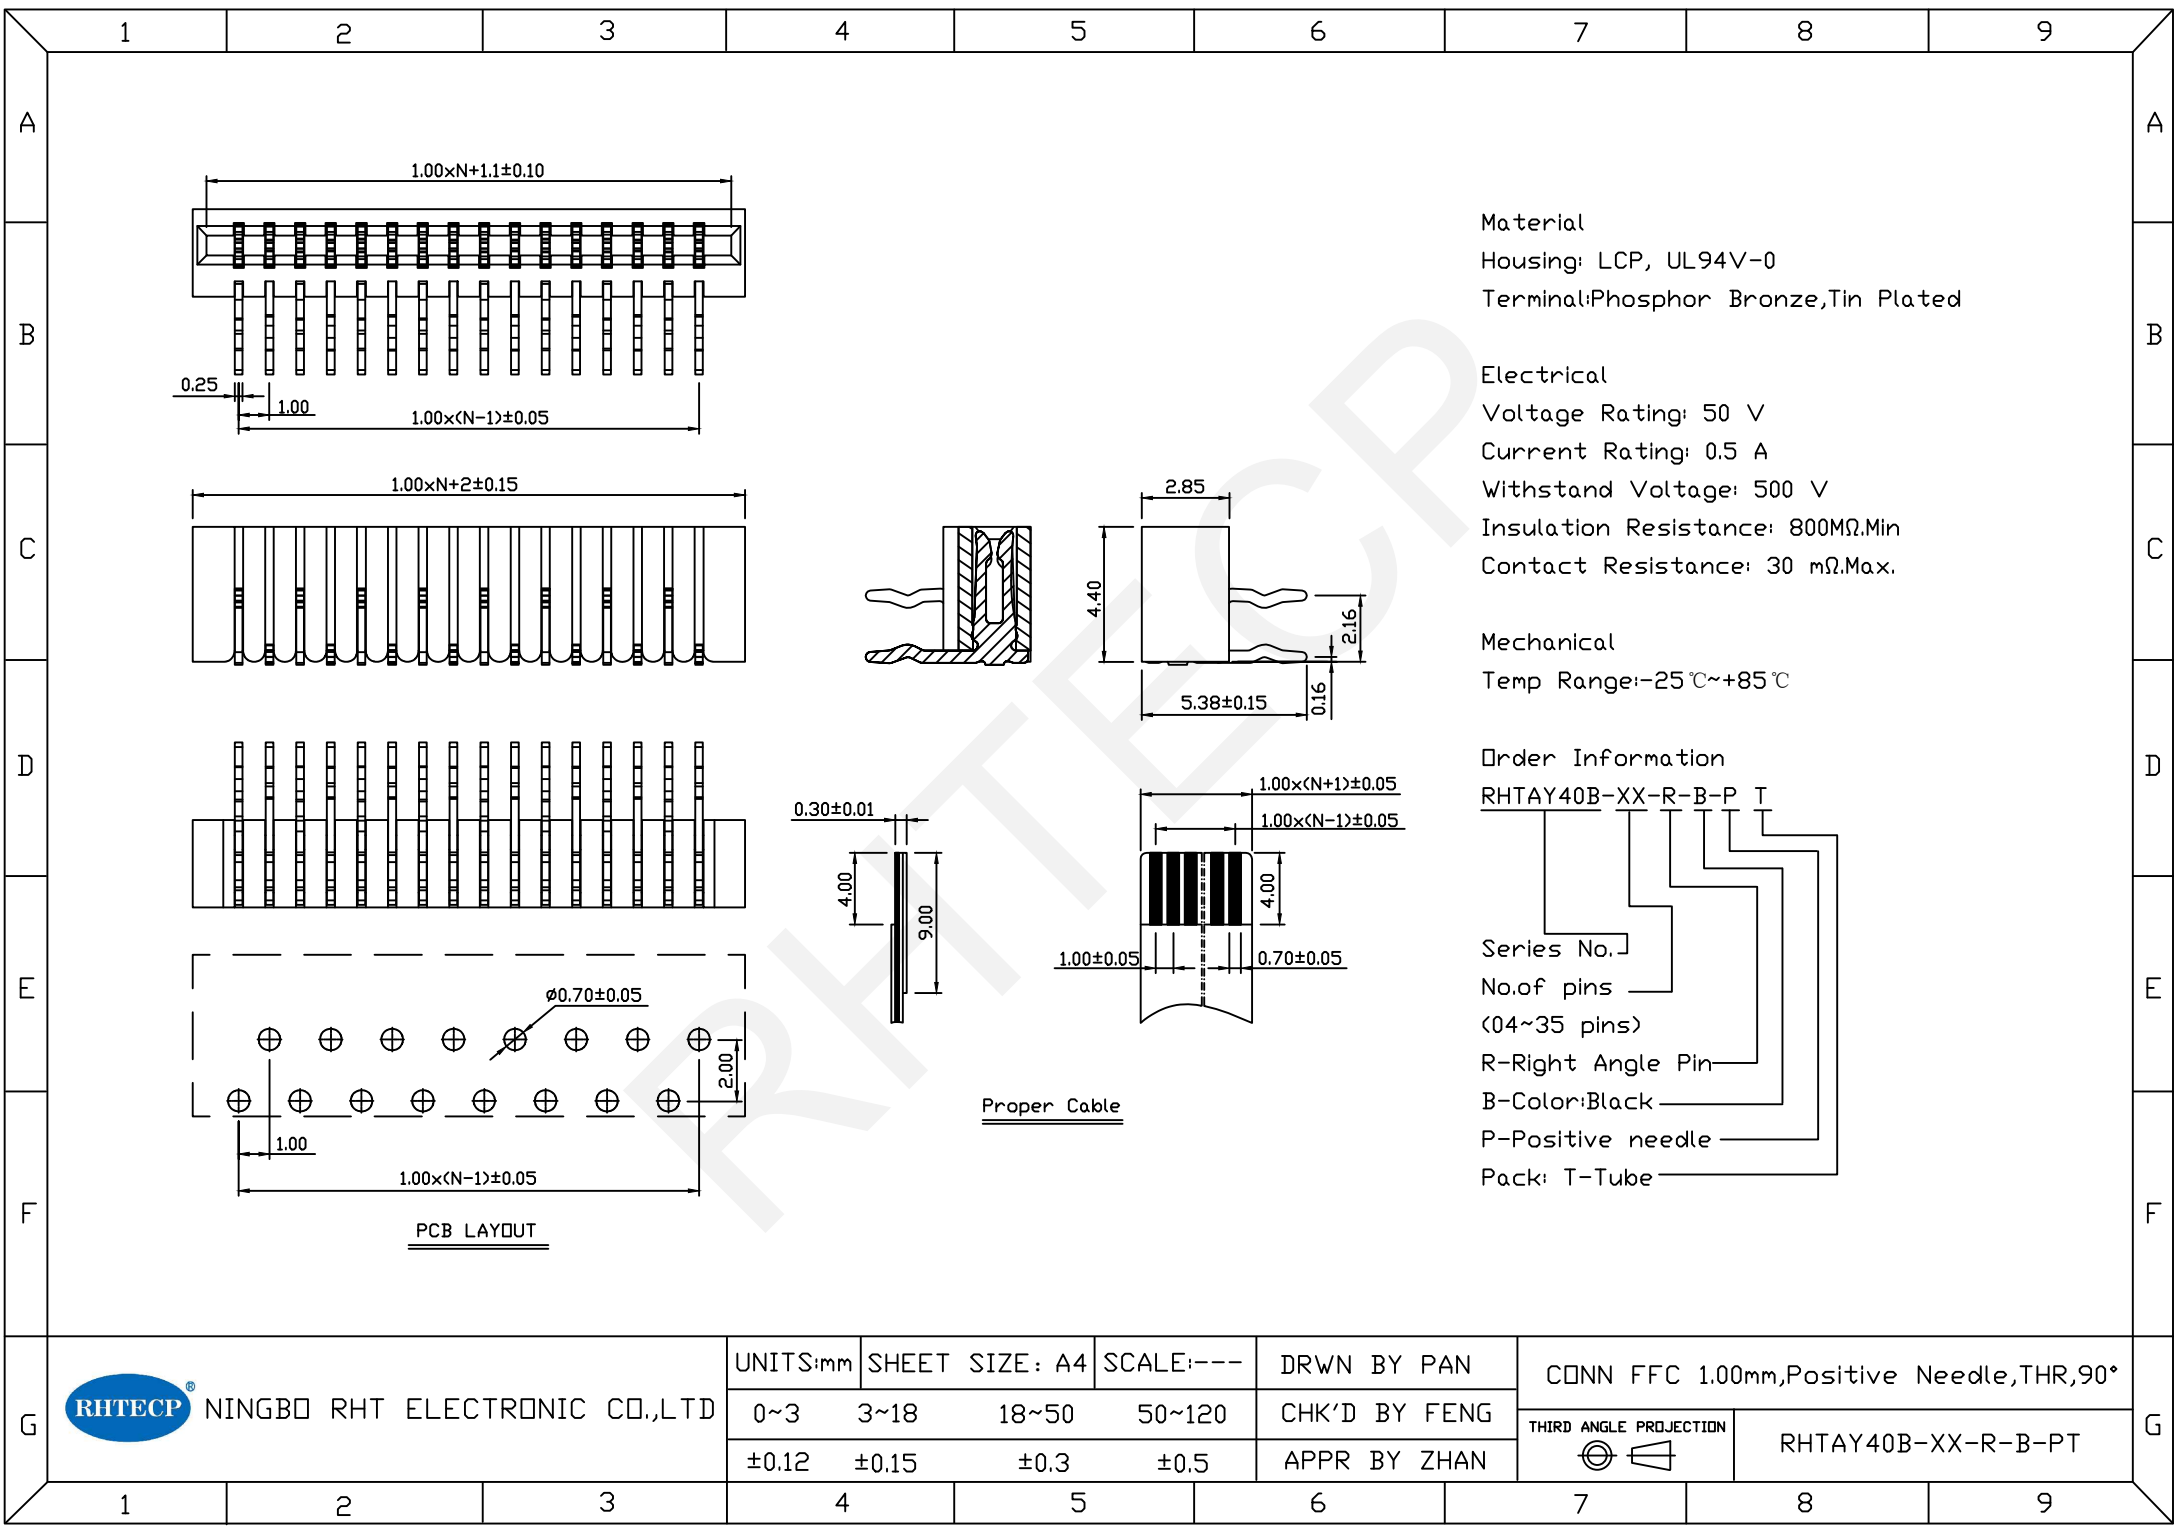


RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

CONN FFC 1.00mm,Positive Needle,THR,90°
THIRD ANGLE PROJECTION
RHTAY40B-XX-R-B-PT

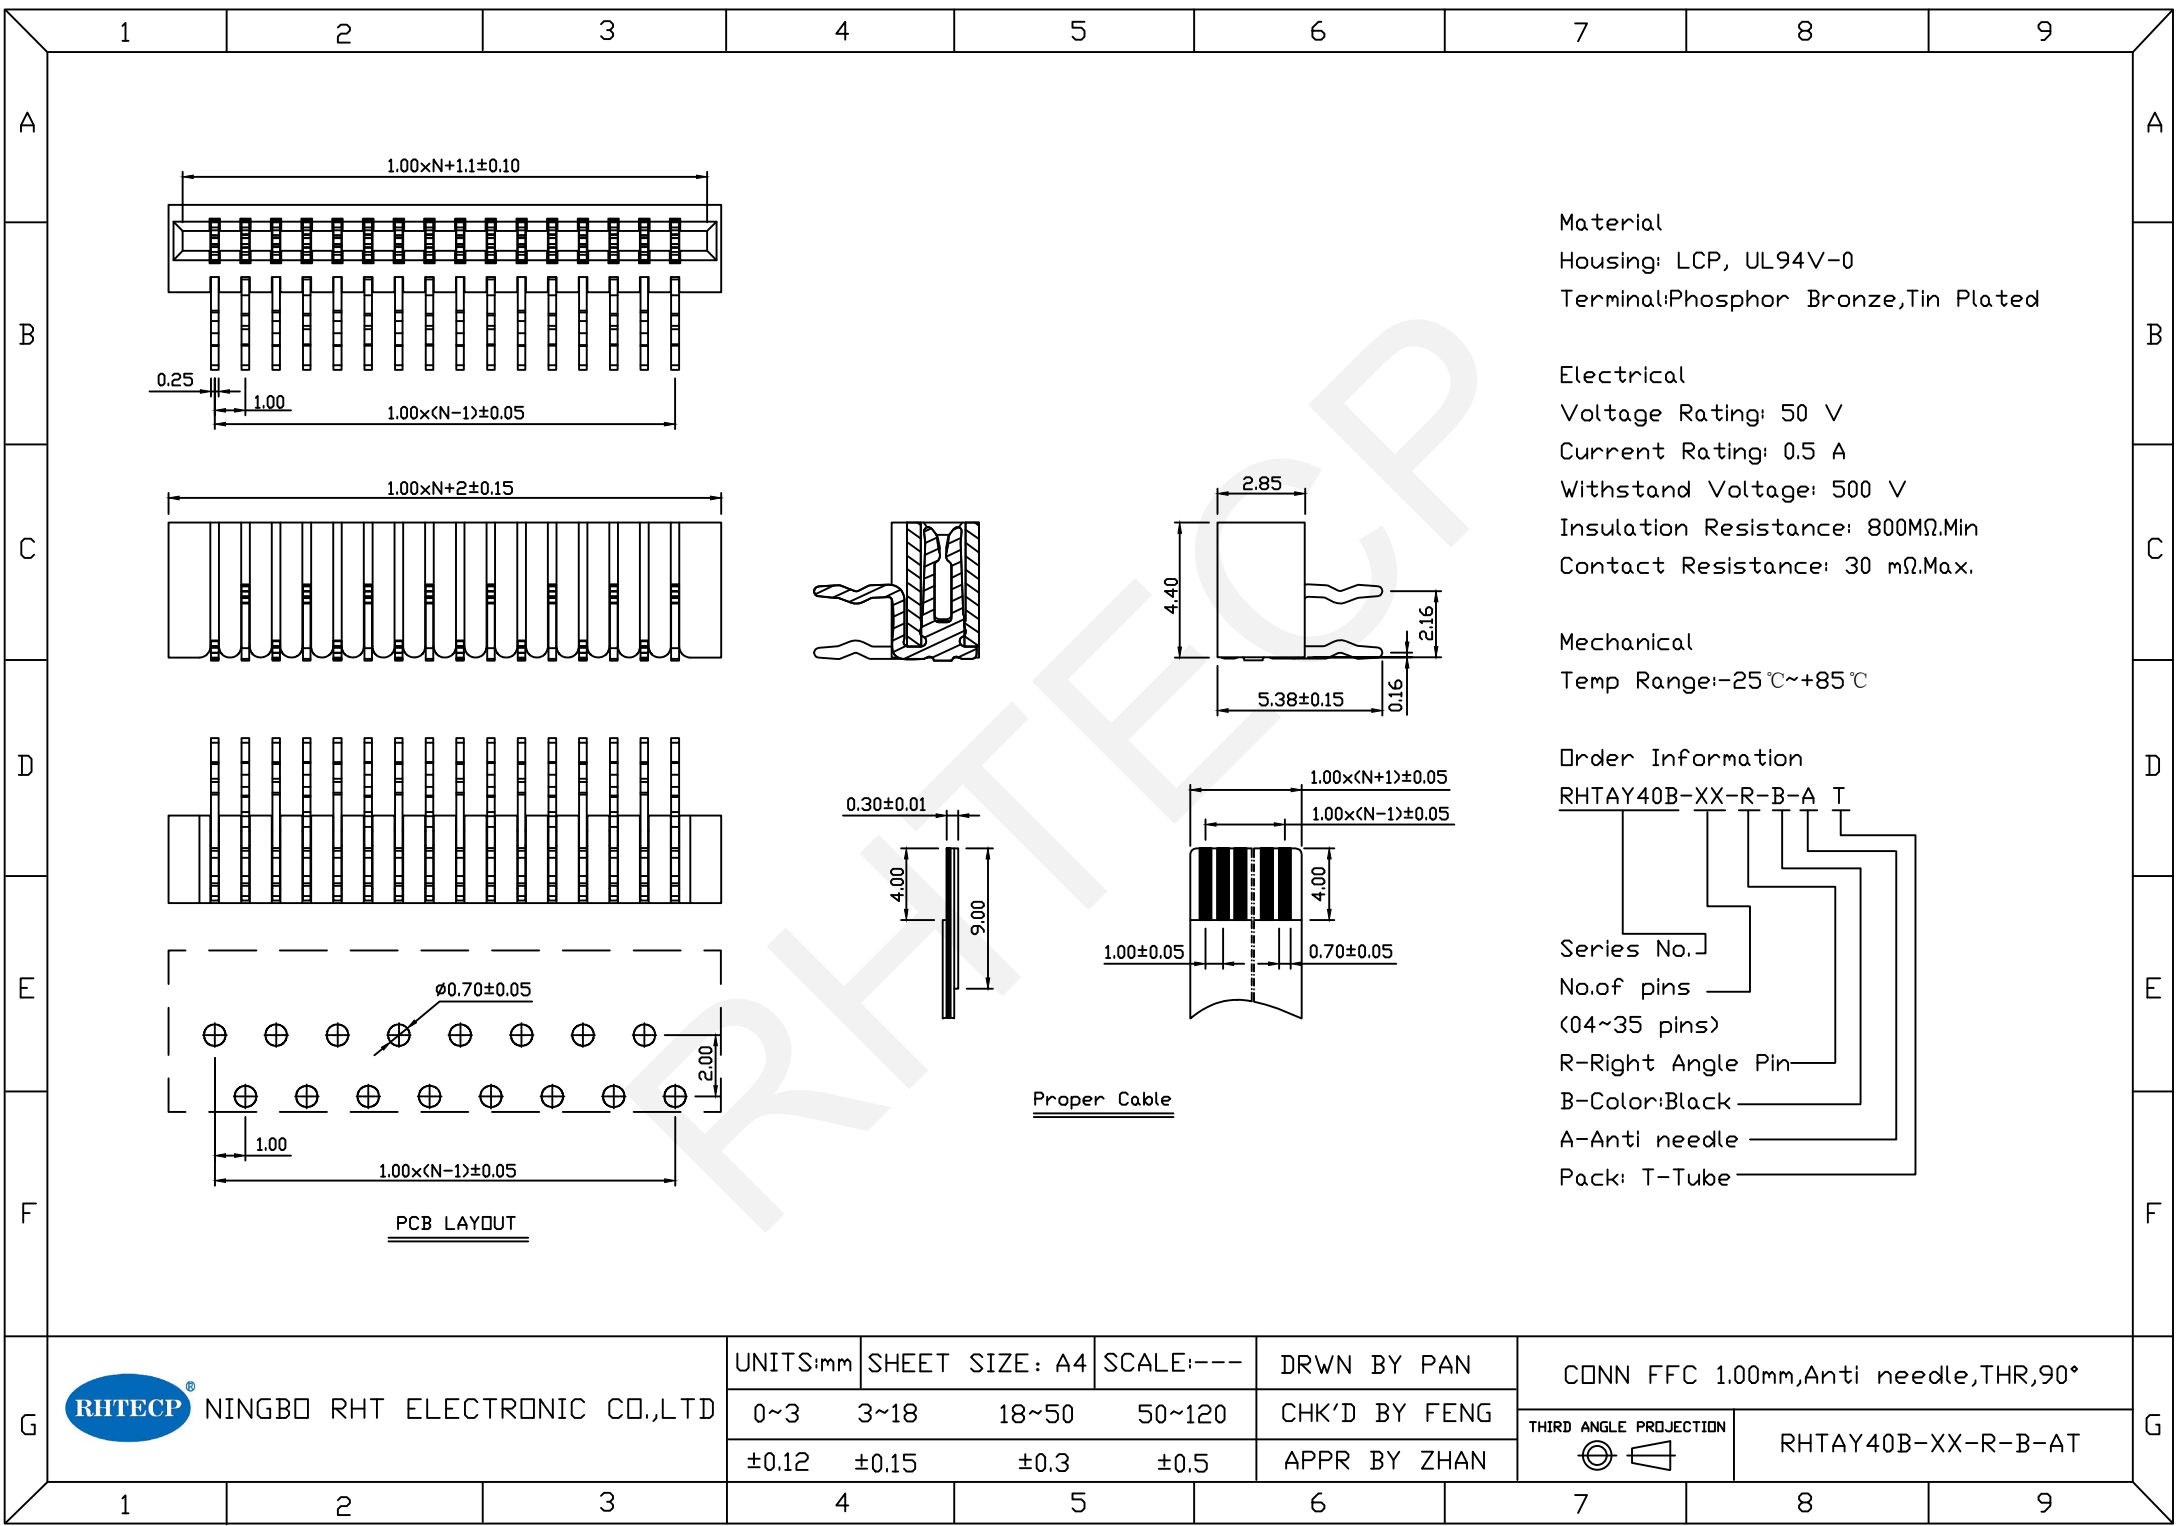

Material
Housing: LCP, UL94V-0
Terminal: Phosphor Bronze, Tin Plated

Electrical
Voltage Rating: 50 V
Current Rating: 0.5 A
Withstand Voltage: 500 V
Insulation Resistance: 800MΩ.Min
Contact Resistance: 30 mΩ.Max.

Mechanical
Temp Range: -25℃~+85℃





Order Information
RHTAY40B-XX-R-B-A T
Series No.
No. of pins
(04~35 pins)
R-Right Angle Pin
B-Color: Black
A-Anti needle
Pack: T-Tube

Proper Cable





RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG			
APPR BY ZHAN			

CONN FFC 1.00mm,Anti needle,THR,90°	
THIRD ANGLE PROJECTION	RHTAY40B-XX-R-B-AT

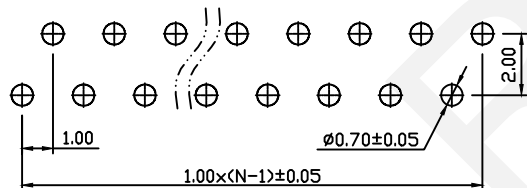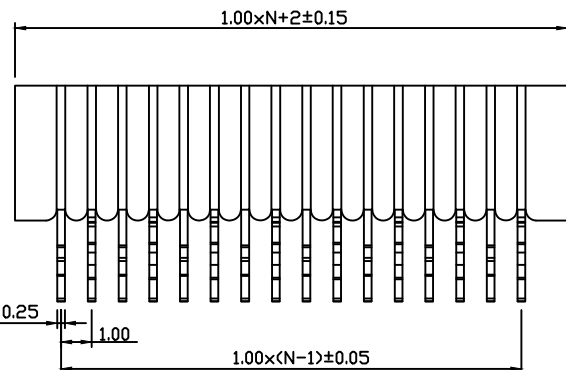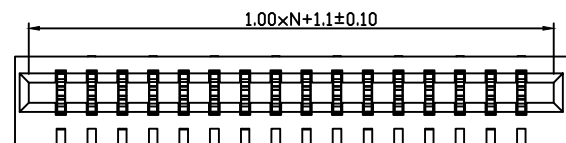

PCB LAYOUT

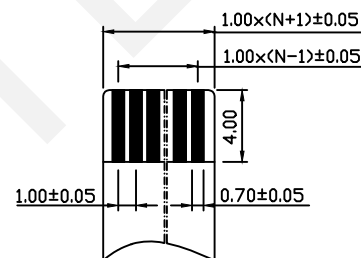

Proper Cable

Material

Housing: LCP, UL94V-0

Terminal: Phosphor Bronze, Tin Plated

Electrical

Voltage Rating: 50 V

Current Rating: 0.5 A

Withstand Voltage: 500 V

Insulation Resistance: 800MΩ.Min

Contact Resistance: 30 mΩ.Max.

Mechanical

Temp Range: -25℃~+85℃

Order Information

RHTAY40B-XX-S-B-P T

Series No.]

No. of pins]

(04~35 pins)

S-Straight Pin]

B-Color: Black]

P-Positive needle]

Pack: T-Tube]

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 1.00mm, Positive Needle, THR, 180°

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY40B-XX-S-B-PT


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4


5

6

7

8

9

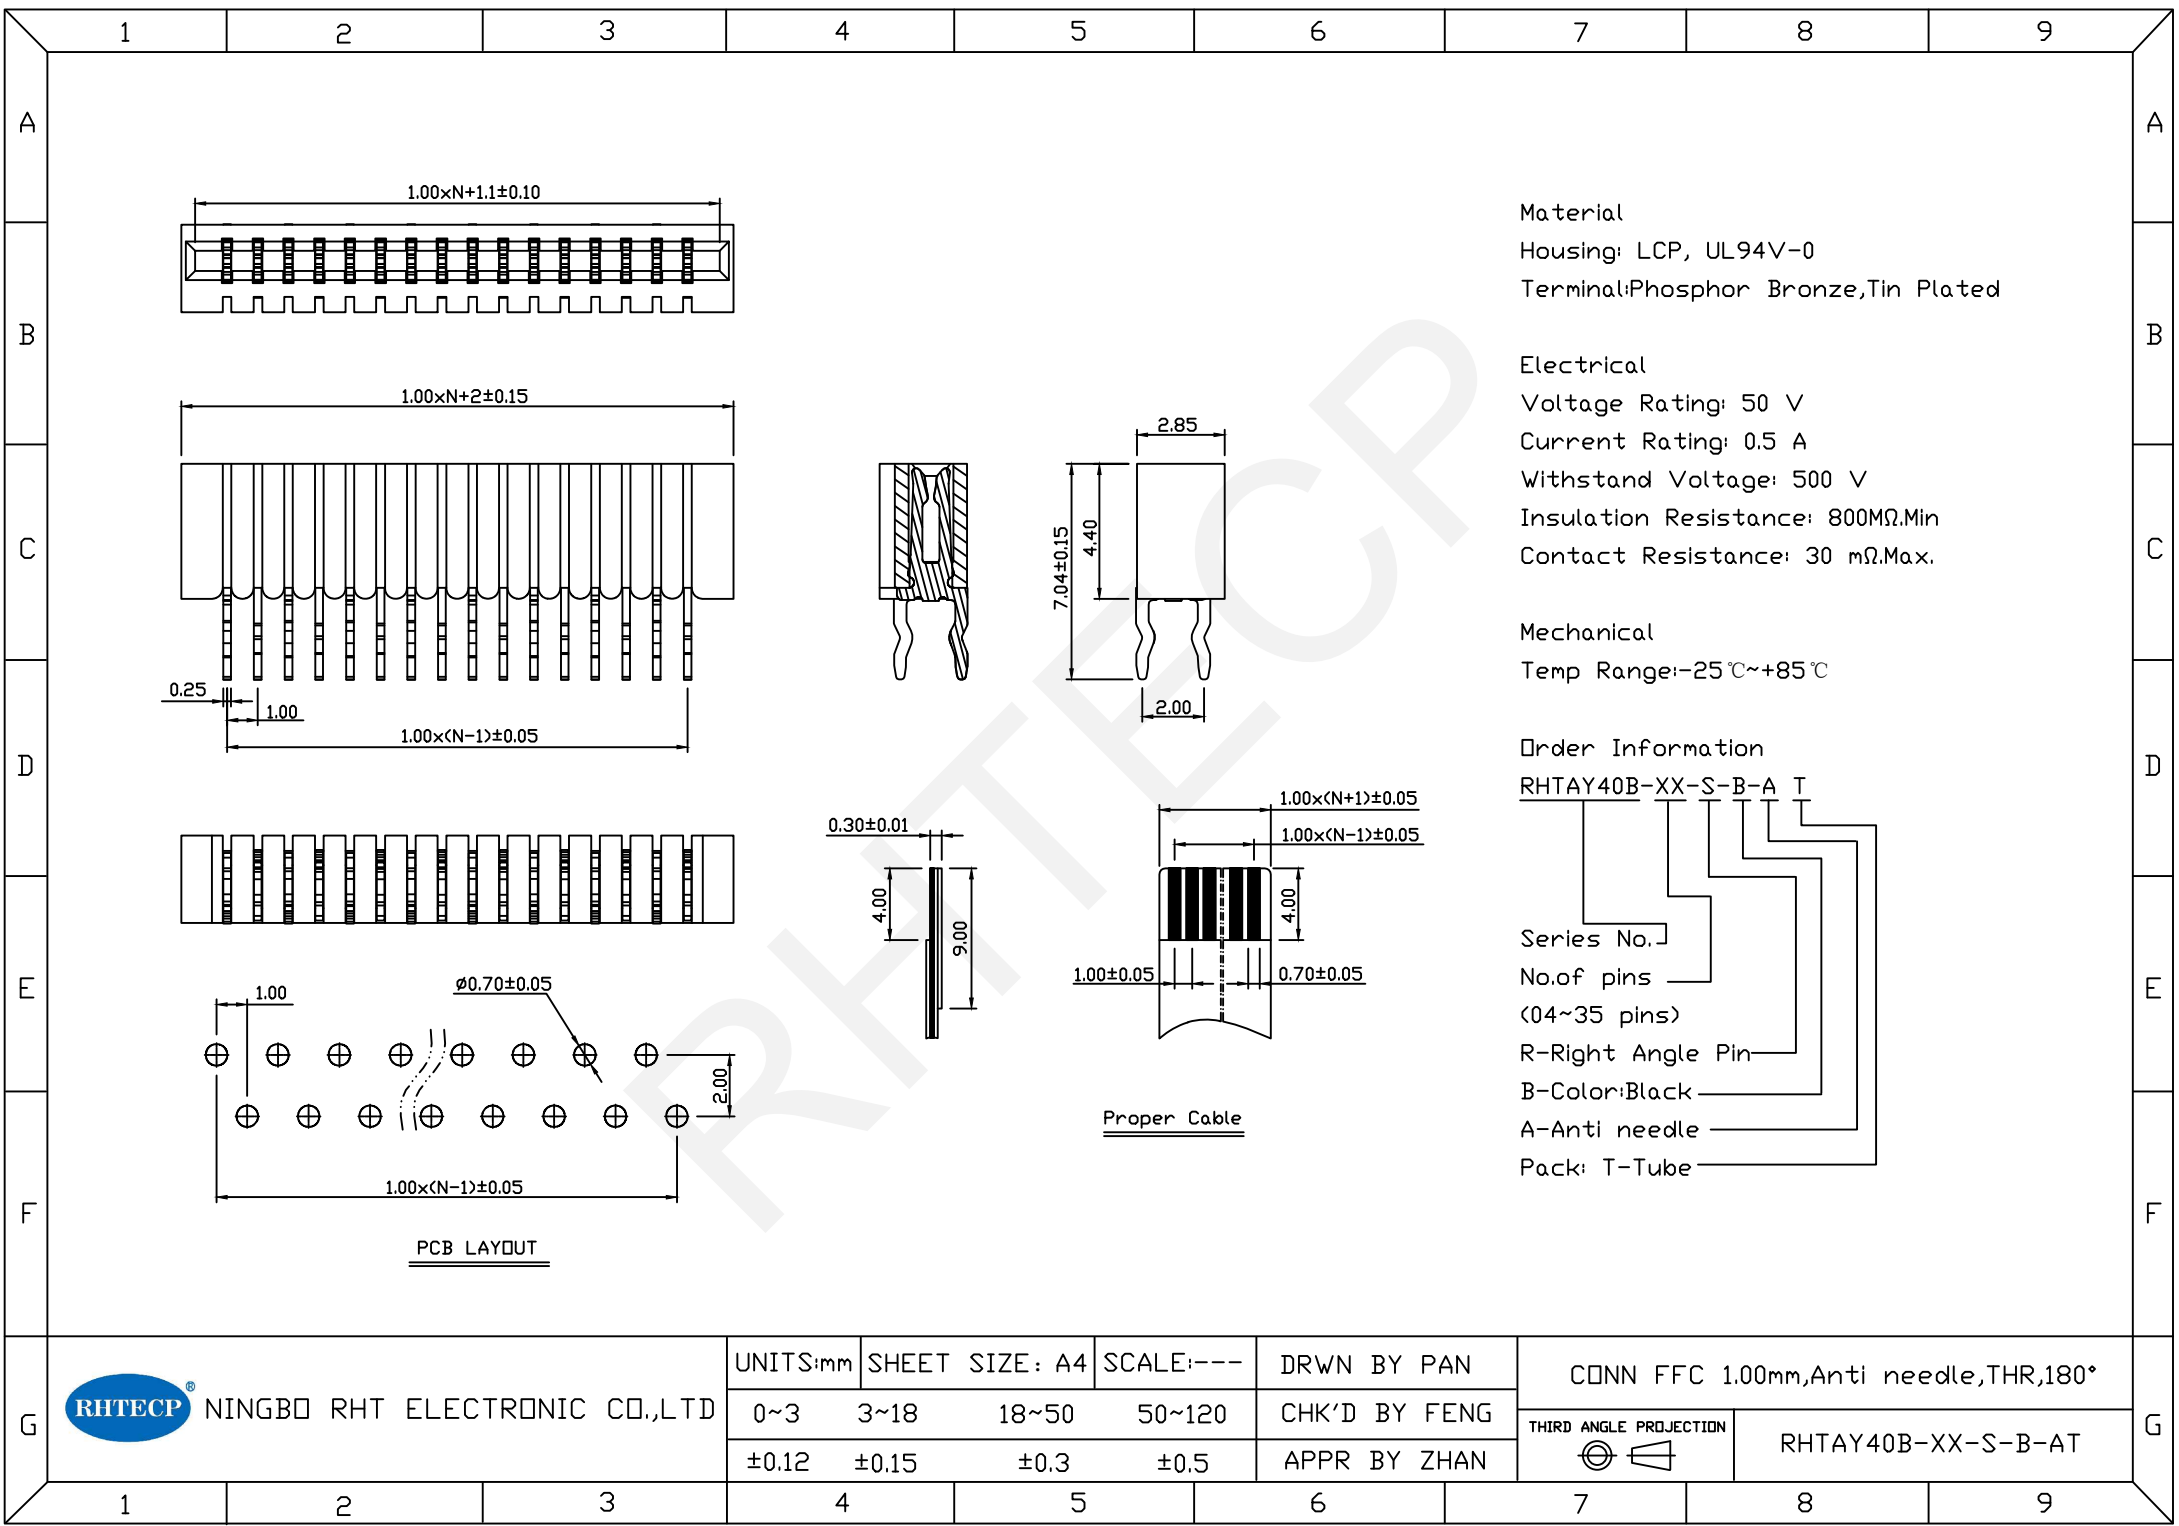

Material
Housing: LCP, UL94V-0
Terminal: Phosphor Bronze, Tin Plated

Electrical
Voltage Rating: 50 V
Current Rating: 0.5 A
Withstand Voltage: 500 V
Insulation Resistance: 800MΩ.Min
Contact Resistance: 30 mΩ.Max.

Mechanical
Temp Range: -25℃~+85℃

Order Information

RHTAY40B-XX-S-B-A T
Series No.
No. of pins
(04~35 pins)
R-Right Angle Pin
B-Color: Black
A-Anti needle
Pack: T-Tube

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


DRWN BY PAN

CHK'D BY FENG


APPR BY ZHAN

CONN FFC 1.00mm,Anti needle,THR,180°

THIRD ANGLE PROJECTION



RHTAY40B-XX-S-B-AT

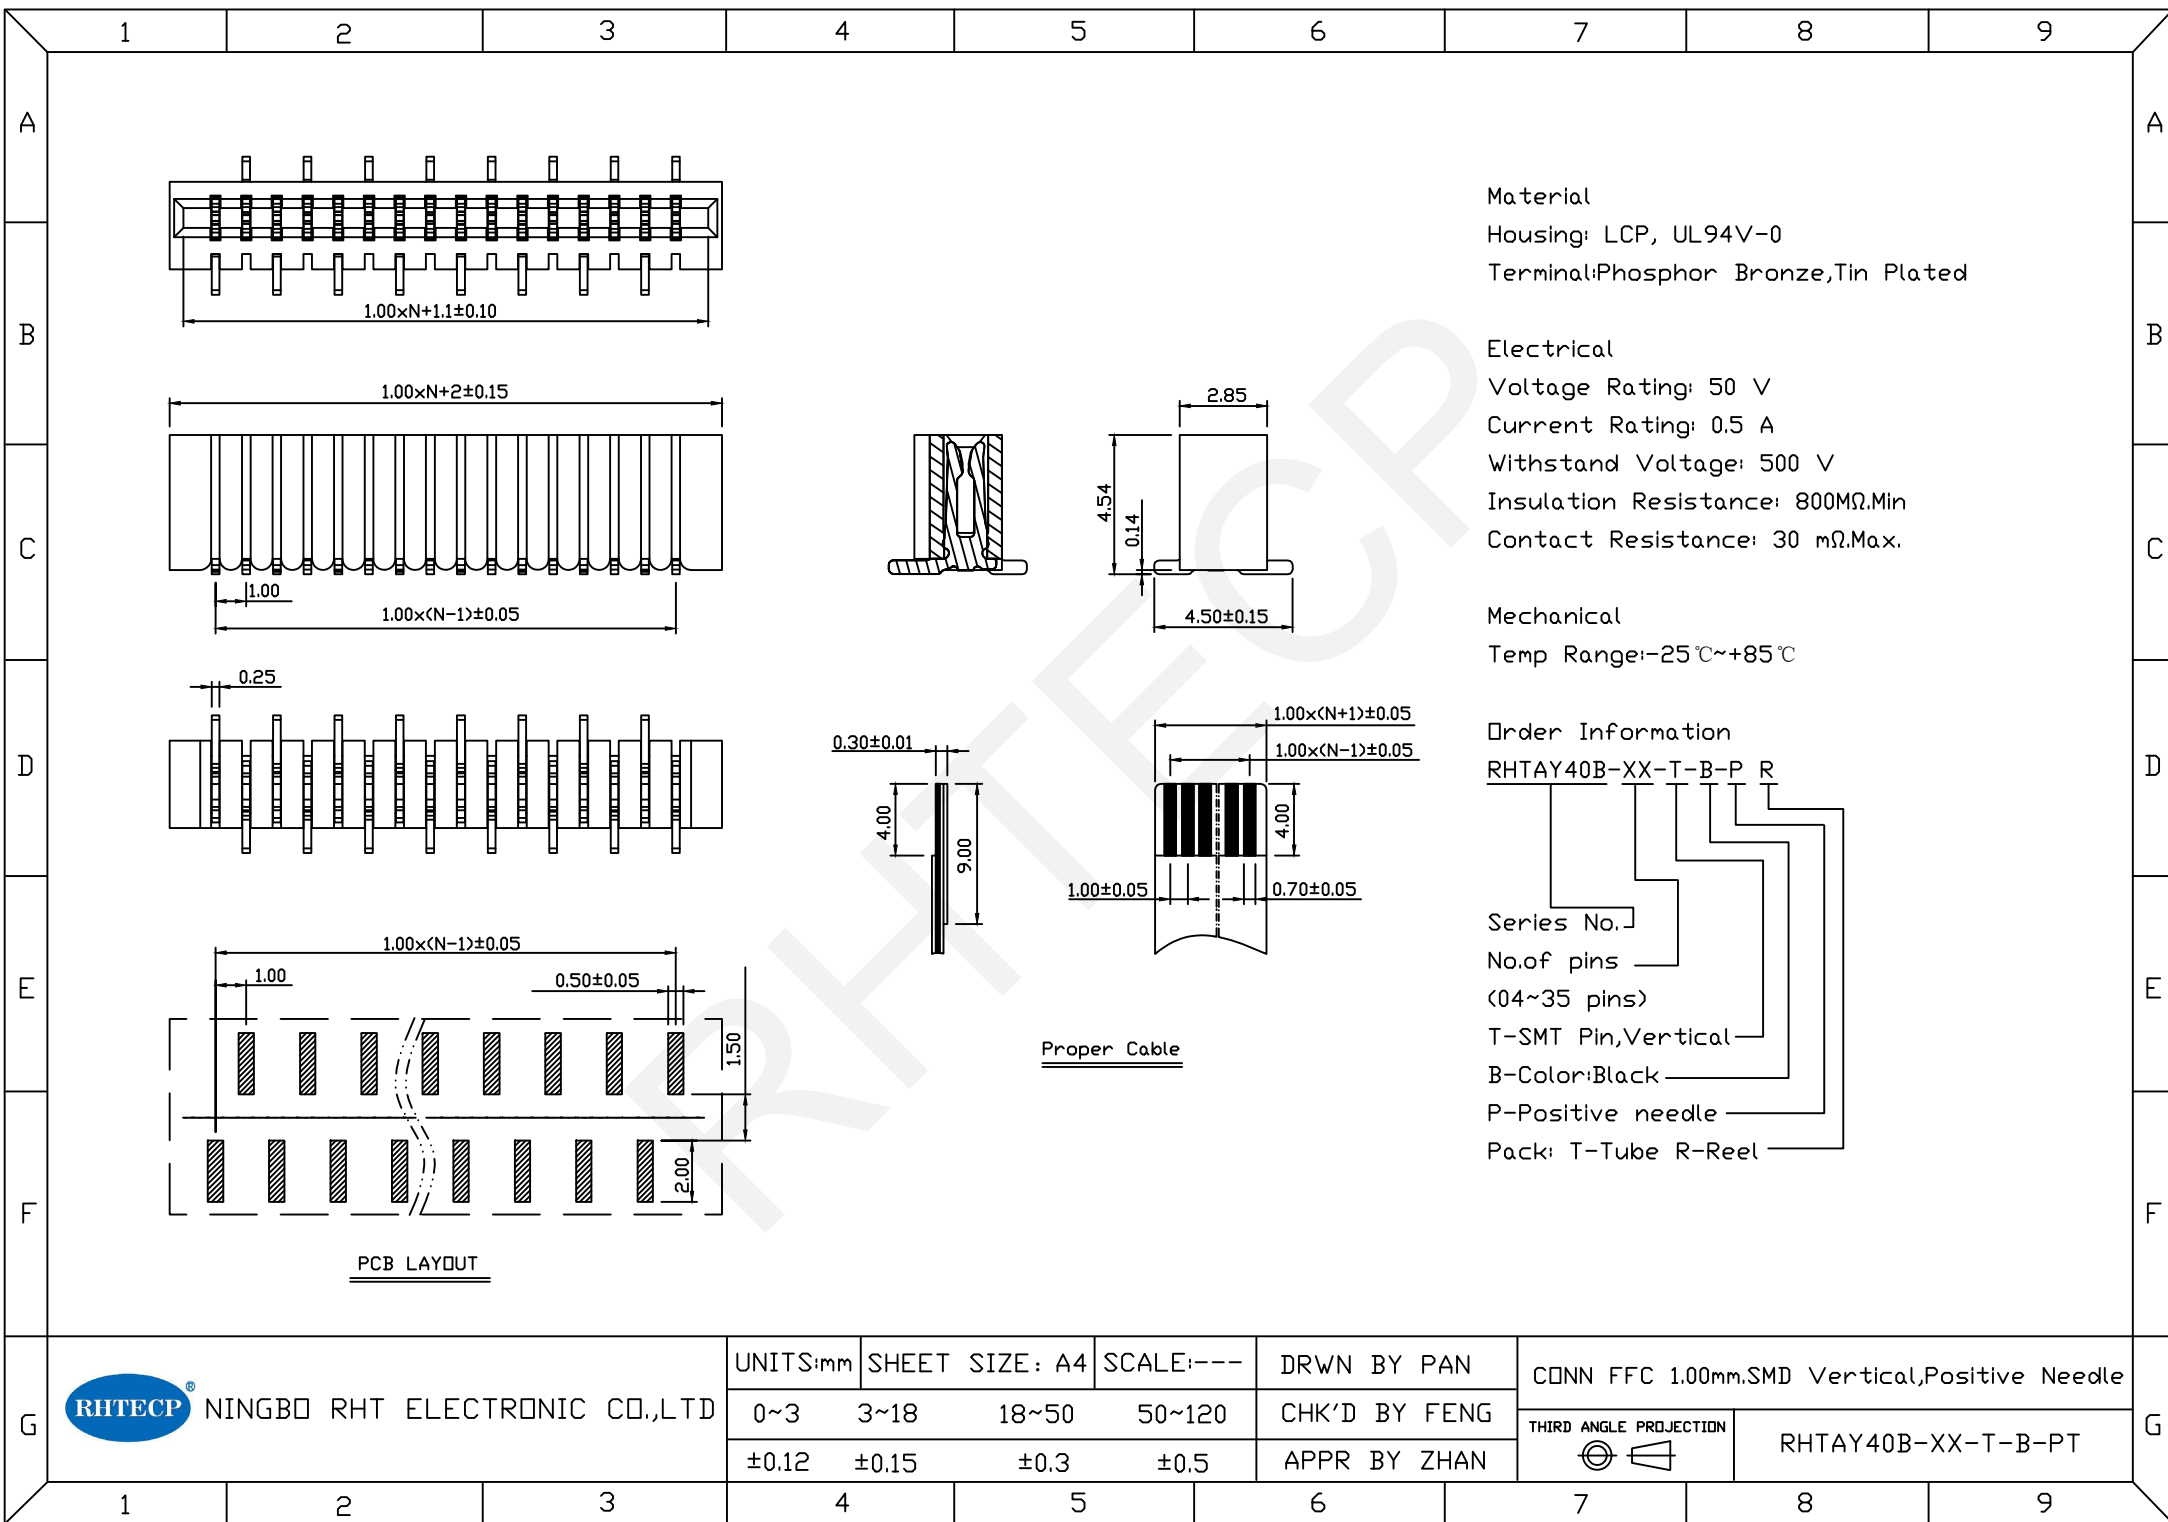









Material
Housing: LCP, UL94V-0
Terminal:Phosphor Bronze,Tin Plated

Electrical
Voltage Rating: 50 V
Current Rating: 0.5 A
Withstand Voltage: 500 V
Insulation Resistance: 800MΩ.Min
Contact Resistance: 30 mΩ.Max.

Mechanical
Temp Range:-25℃~+85℃

Order Information
RHTAY40B-XX-T-B-P R

Series No. _____
No.of pins _____
(04~35 pins)
T-SMT Pin,Vertical _____
B-Color:Black _____
P-Positive needle _____
Pack: T-Tube R-Reel _____

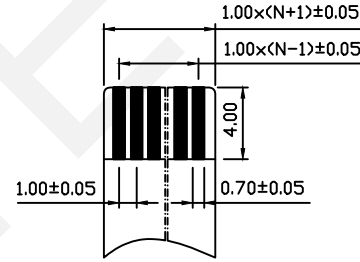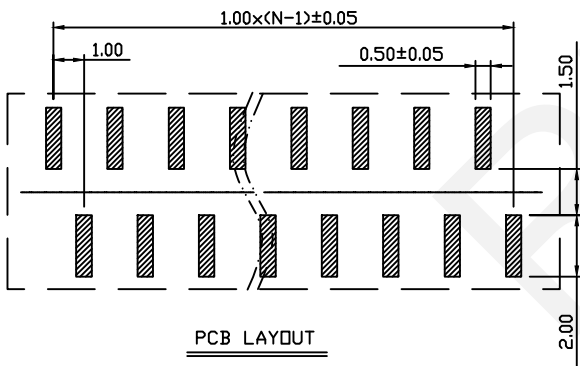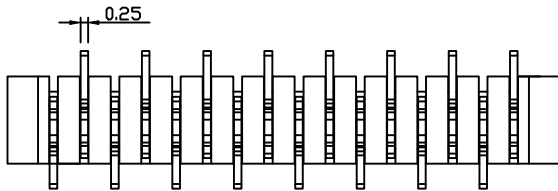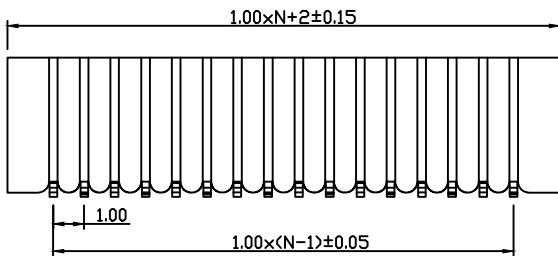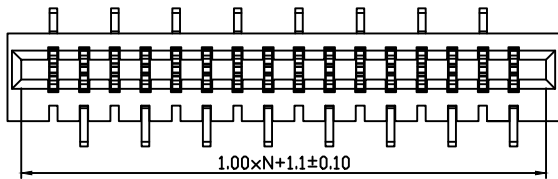

Proper Cable

Material
Housing: LCP, UL94V-0
Terminal: Phosphor Bronze, Tin Plated

Electrical
Voltage Rating: 50 V
Current Rating: 0.5 A
Withstand Voltage: 500 V
Insulation Resistance: 800MΩ.Min
Contact Resistance: 30 mΩ.Max.

Mechanical
Temp Range: -25℃~+85℃

Order Information

RHTAY40B-XX-T-B-A R

Series No.]
No. of pins]
(04~35 pins)
T-SMT Pin, Vertical]
B-Color: Black]
A-Anti needle]
Pack: T-Tube R-Reel]

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	CONN FFC 1.00mm.SMD Vertical,Anti Needle	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION RHTAY40B-XX-T-B-AT
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

