

Material

Insulator: Glass-Reinforced Thermoplastic

Contact: Copper Alloy.

Tin/Lead Plated Over Nickel

Electrical

Voltage Rating: 250 V

Current Rating: 1 A

Withstand Voltage: 1000 V

Insulation Resistance: 5000MΩ.Min

Contact Resistance: 25 mΩ.Max.

Mechanical

Temp Range: -40℃~+105℃

Order Information



RHTAYB19-XX-S

Series No.]


No. of pins:]

(03~21 pins)

S-Straight Pin

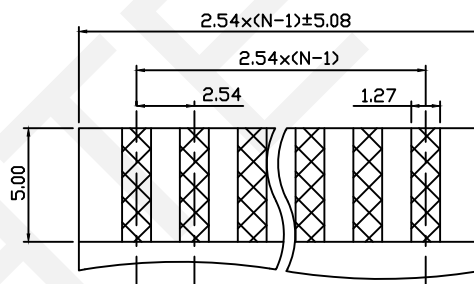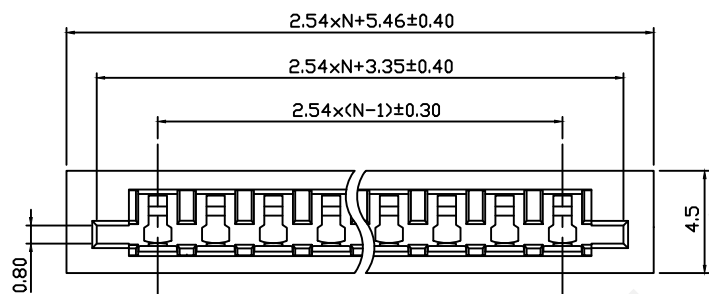

Proper Cable

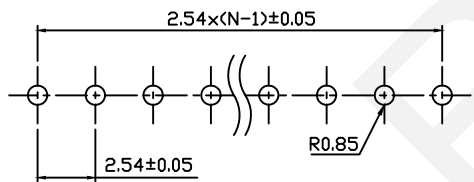

PCB Layout

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 2.54mm,THR180°

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYB19-XX-S

