

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Beryllium Copper or Phosphor Bronze

Plating: Gold 1.25u" over 50u" Nickel

Electrical Characteristics

Current Rating: 3.0 AMP

Insulator Resistance: 1000MΩ min. at DC 100V

Contact Resistance: 10mΩ Max.

Operating Temperature: -40°C ~ +105°C

Order Information:

RHTAY09-1.9-1-XX-S-Y

IC Socket

Plastic Height

1.9mm, 3.0mm, 4.2mm, 7.0mm

Row: 1-Single Layer

2-Double Layer

XX-No. of 02~80 Pin

Type: S-Straight Pin

R-Right Angle Pin T-SMT Pin

Y-Imported Beryllium Copper

Z-Domestic Phosphor Bronze

UNITS:mm	SHEET SIZE: A4		SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN


2.54mm Pitch SIP Socket Connector	
THIRD ANGLE PROJECTION	RHTAY09-1.9-1-XX-S-Y




NINGBO RHT ELECTRONIC CO.,LTD



RHTAY09-1.9-1-XX-S-Y

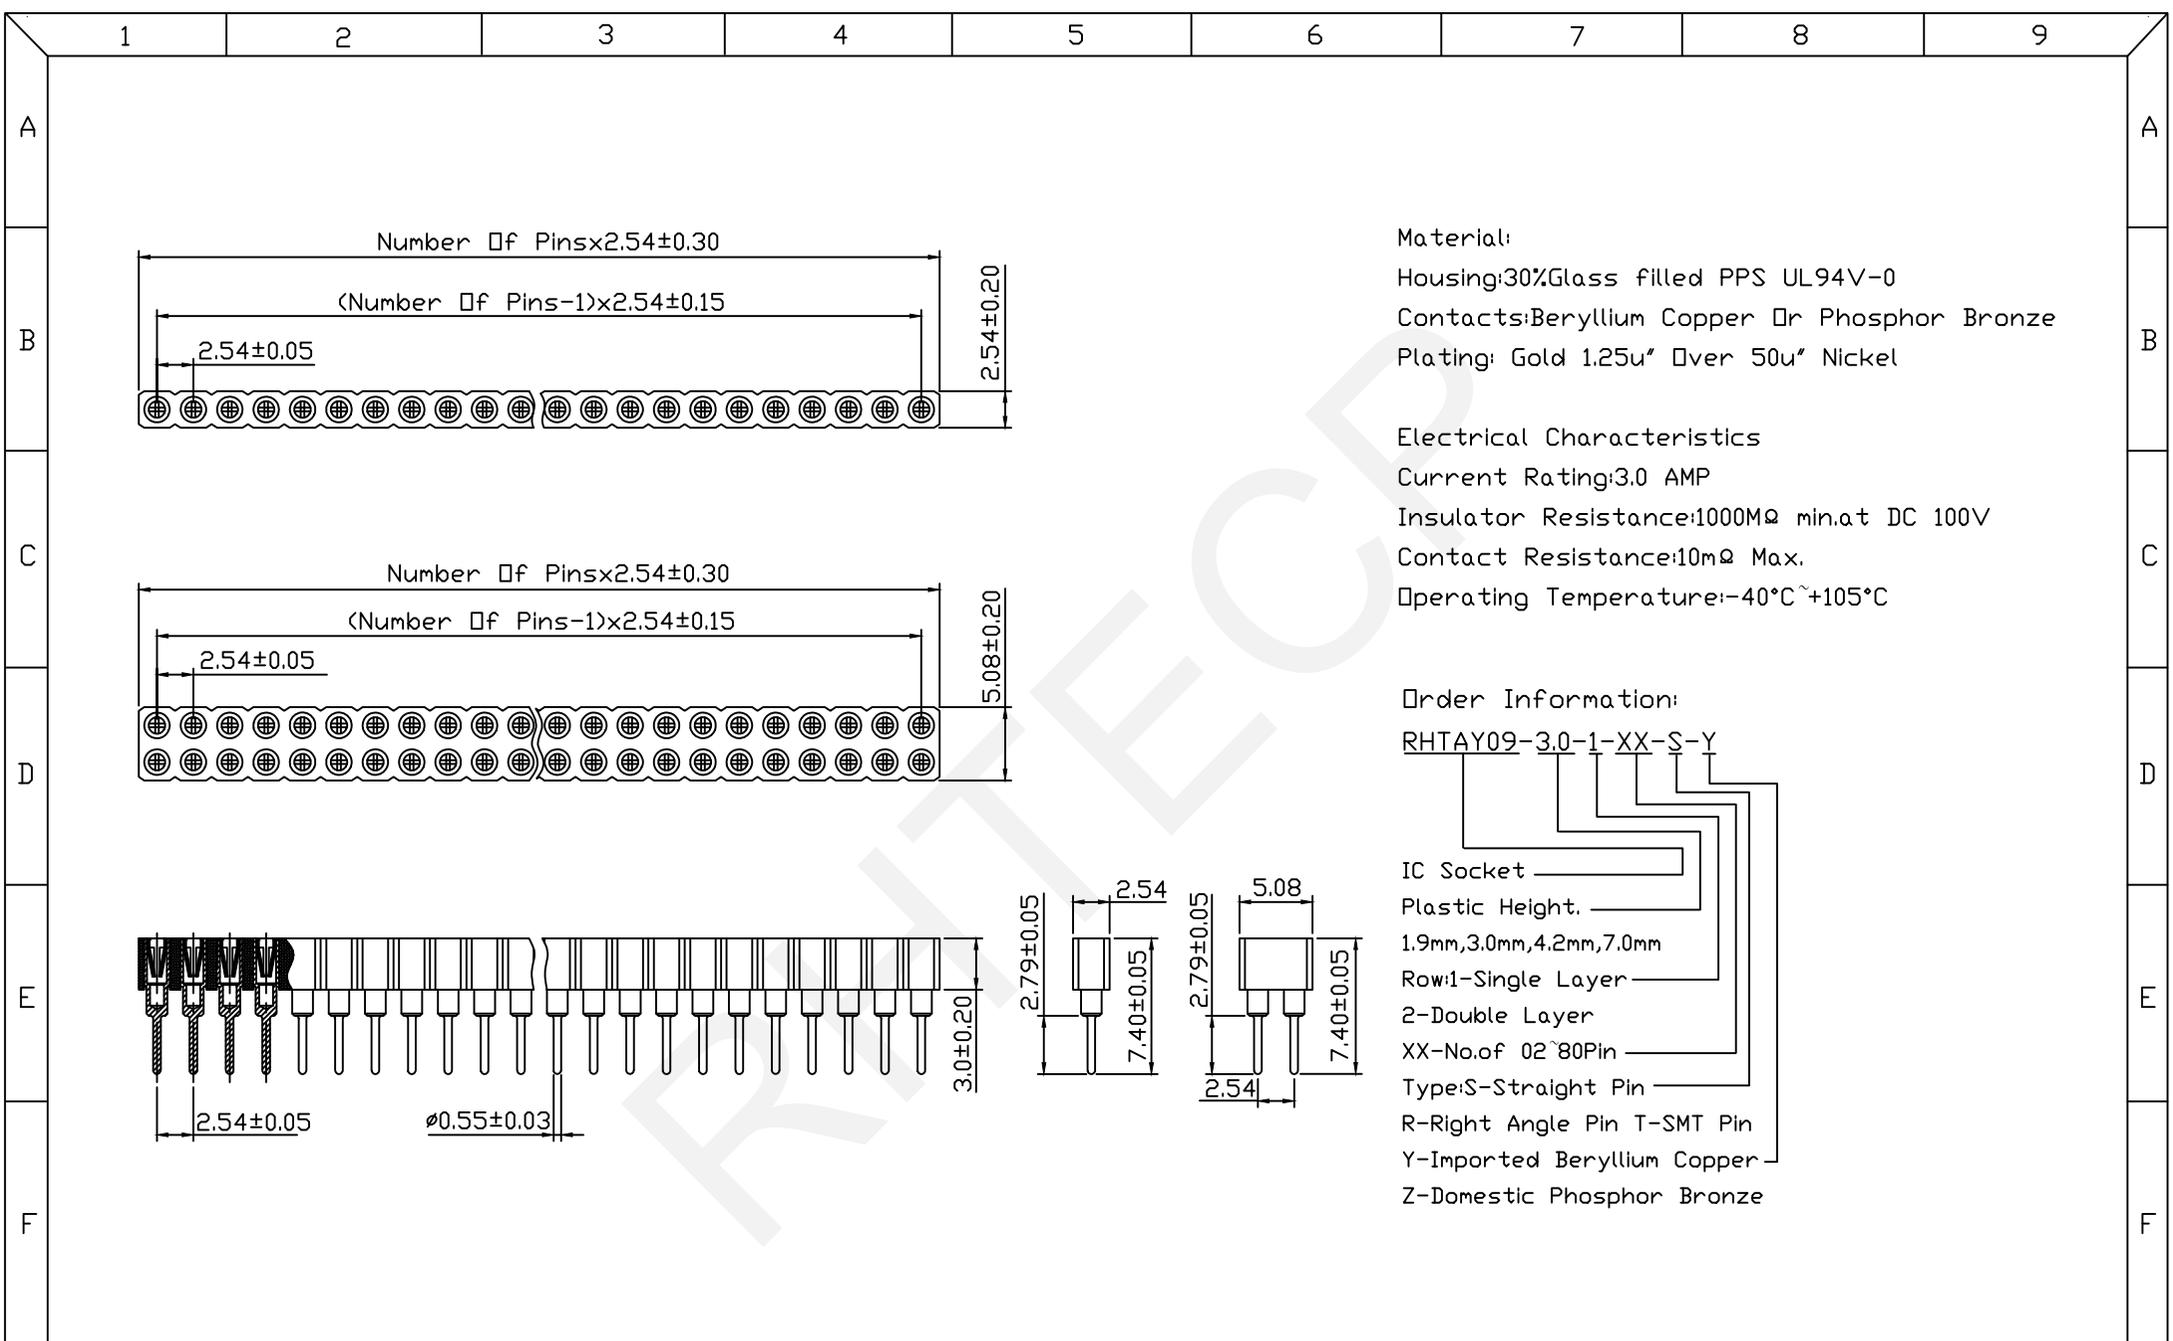

G	NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	2.54mm Pitch SIP Socket Connector		
				0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 	RHTAY09-3.0-1-XX-S-Y
				± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN		
1	2	3	4	5	6	7	8	9		

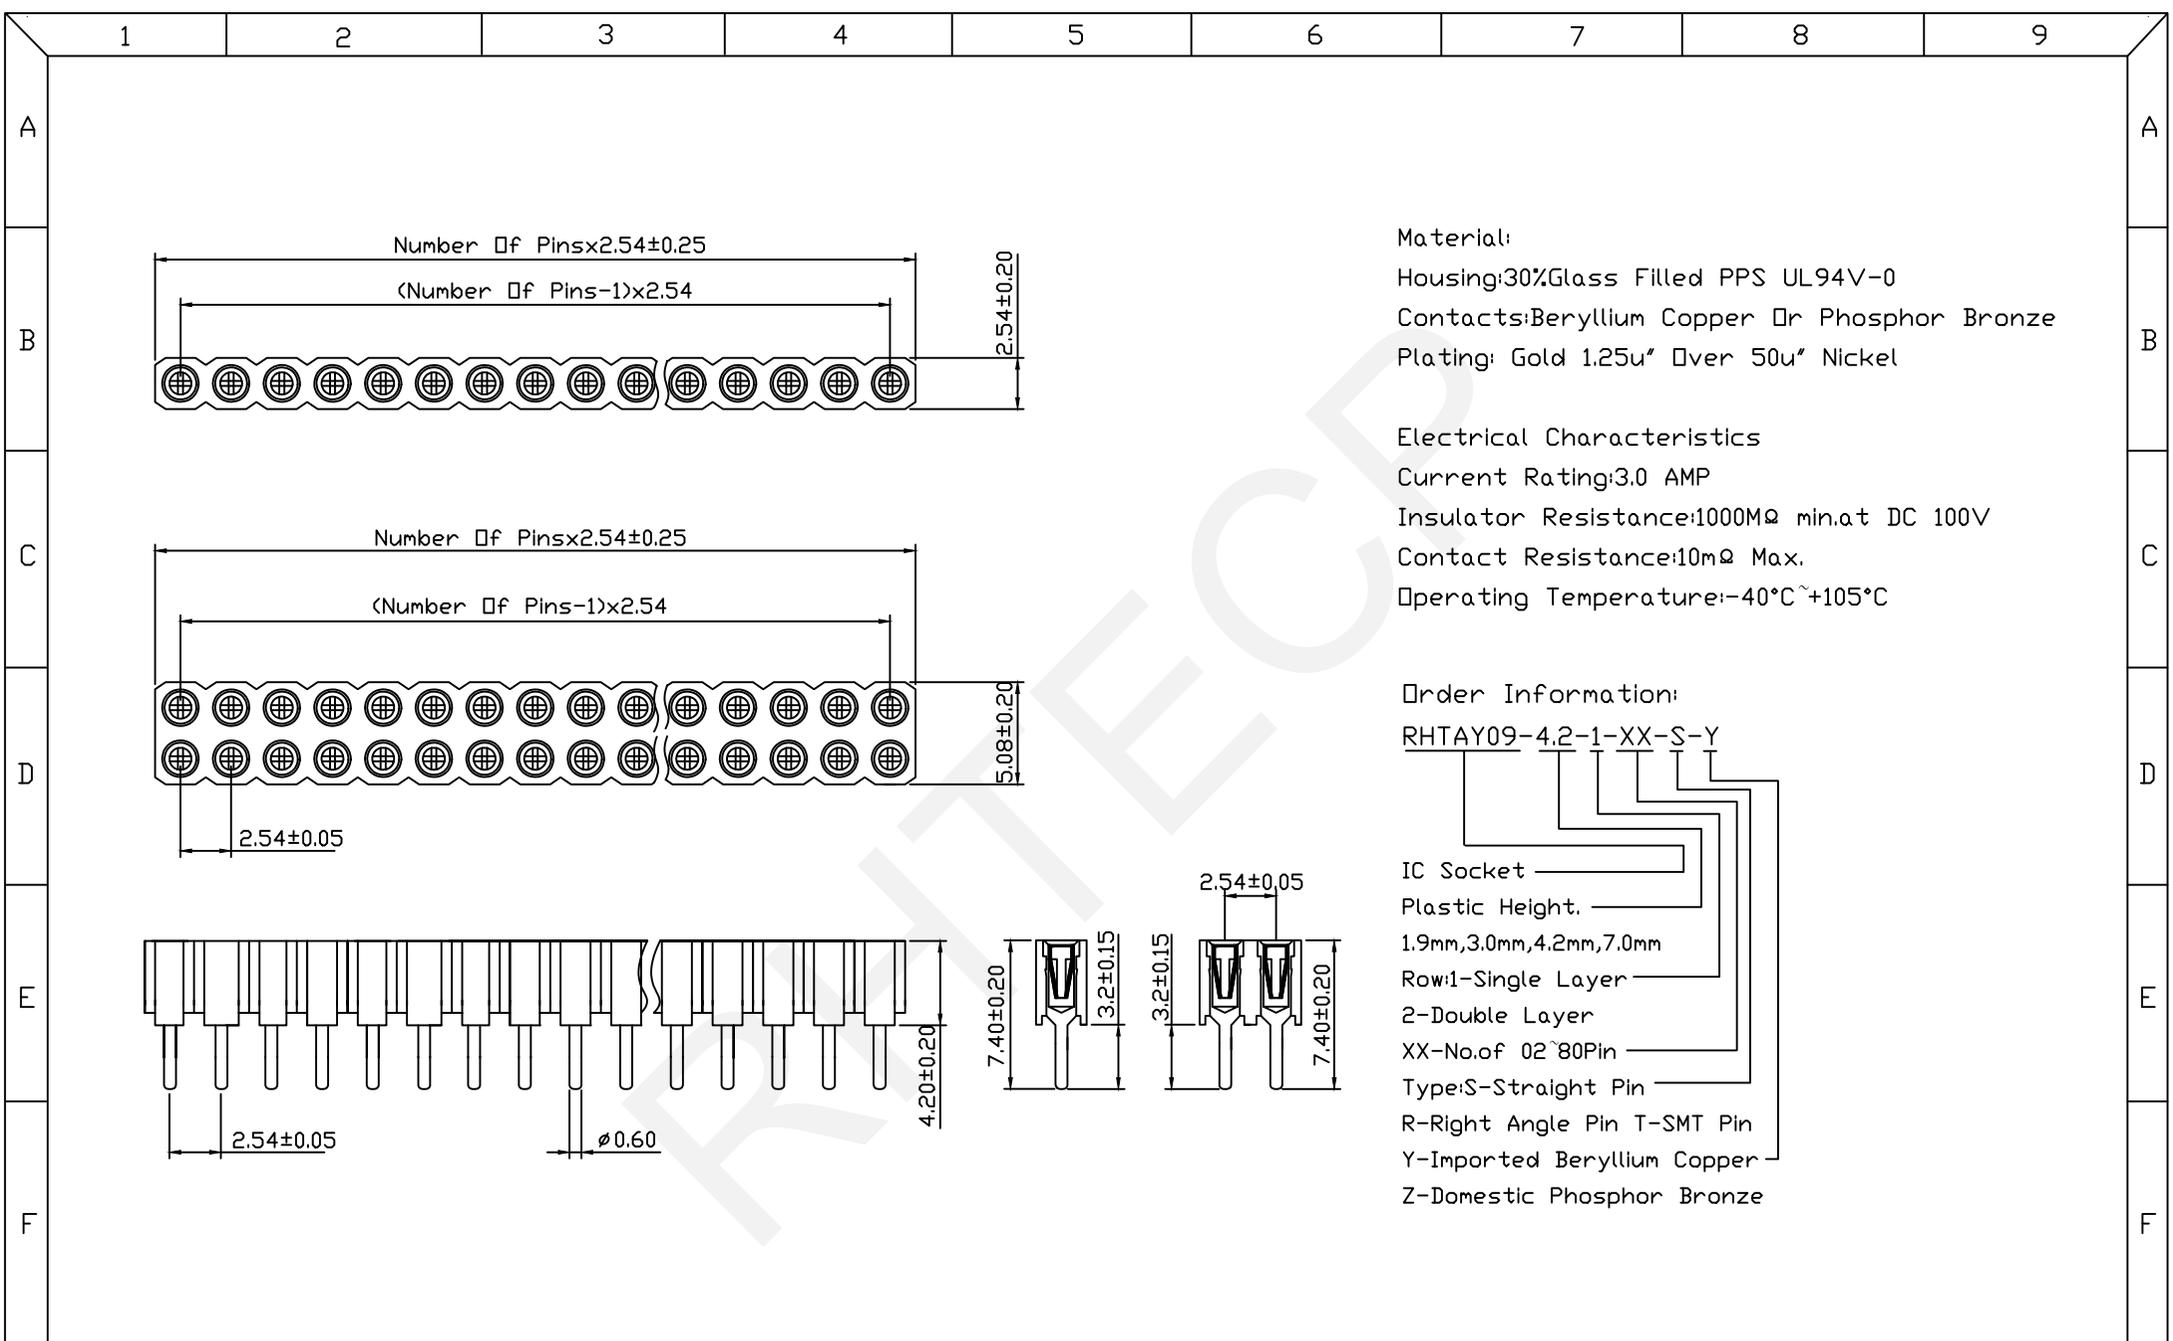




Material:
 Housing: 30% Glass Filled PPS UL94V-0
 Contacts: Beryllium Copper or Phosphor Bronze
 Plating: Gold 1.25u" over 50u" Nickel

Electrical Characteristics
 Current Rating: 3.0 AMP
 Insulator Resistance: 1000MΩ min. at DC 100V
 Contact Resistance: 10mΩ Max.
 Operating Temperature: -40°C ~ +105°C

Order Information:
 RHTAY09-4.2-1-XX-S-Y

- IC Socket
- Plastic Height: 1.9mm, 3.0mm, 4.2mm, 7.0mm
- Row: 1-Single Layer
- 2-Double Layer
- XX-No. of 02~80 Pin
- Type: S-Straight Pin
- R-Right Angle Pin T-SMT Pin
- Y-Imported Beryllium Copper
- Z-Domestic Phosphor Bronze

G	NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN	2.54mm Pitch SIP Socket Connector		
				0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 	RHTAY09-4.2-1-XX-S-Y
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		
1	2	3	4	5	6	7	8	9		

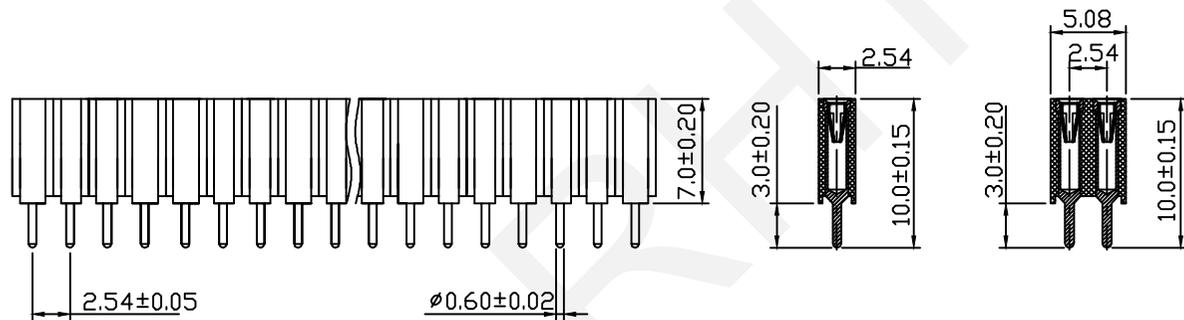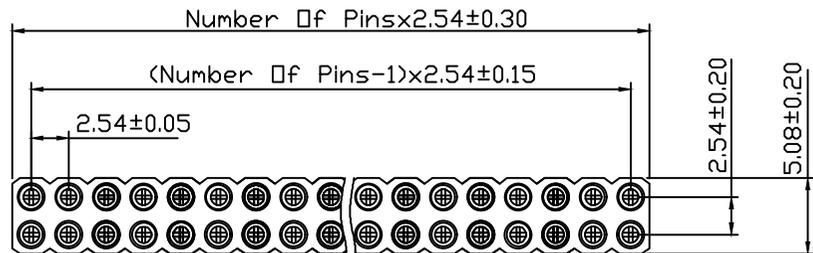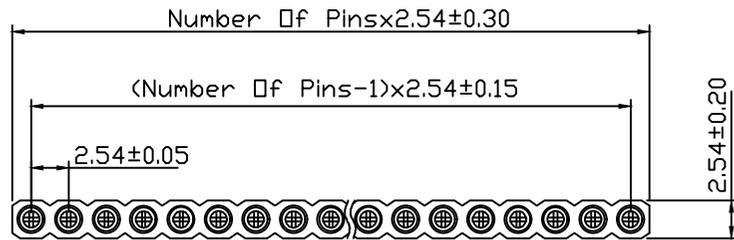

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Beryllium Copper Or Phosphor Bronze

Plating: Gold 1.25u" Over 50u" Nickel

Electrical Characteristics

Current Rating: 3.0 AMP

Insulator Resistance: 1000MΩ min. at DC 100V

Contact Resistance: 10mΩ Max.

Operating Temperature: -40°C ~ +105°C

Order Information:

RHTAY09-7.0-1-XX-S-Y

- IC Socket
- Plastic Height. 1.9mm, 3.0mm, 4.2mm, 7.0mm
- Row: 1-Single Layer
- 2-Double Layer
- XX-No. of 02~80 Pin
- Type: S-Straight Pin
- R-Right Angle Pin T-SMT Pin
- Y-Imported Beryllium Copper
- Z-Domestic Phosphor Bronze






RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2.54mm Pitch SIP Socket Connector

THIRD ANGLE PROJECTION

RHTAY09-7.0-1-XX-S-Y

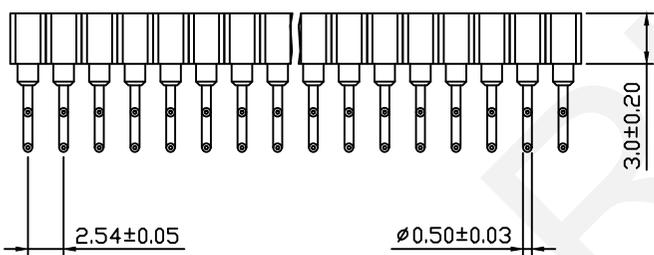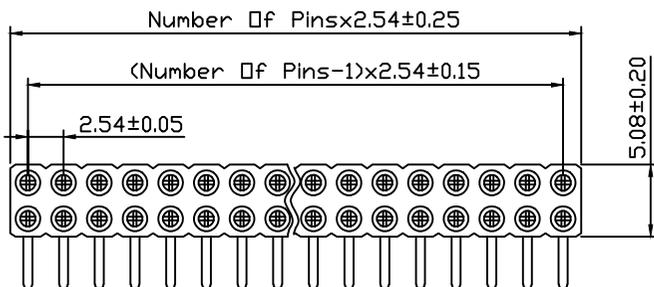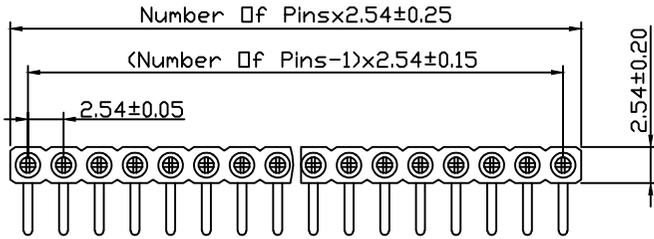

Material:
 Housing: 30% Glass Filled PPS UL94V-0
 Contacts: Beryllium Copper or Phosphor Bronze
 Plating: Gold 1.25u" over 50u" Nickel


Electrical Characteristics
 Current Rating: 3.0 AMP
 Insulator Resistance: 1000MΩ min. at DC 100V
 Contact Resistance: 10mΩ Max.
 Operating Temperature: -40°C ~ +105°C

Order Information:
 RHTAY09-1.9-1-XX-R-Y

IC Socket
 Plastic Height:
 1.9mm, 3.0mm, 4.2mm, 7.0mm
 Row: 1-Single Layer
 2-Double Layer
 XX-No. of 02~80 Pin
 Type: S-Straight Pin
 R-Right Angle Pin T-SMT Pin
 Y-Imported Beryllium Copper
 Z-Domestic Phosphor Bronze

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	2.54mm Pitch SIP Socket Connector	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAY09-1.9-1-XX-R-Y






Material:
 Housing:30%Glass Filled PPS UL94V-0
 Contacts:Beryllium Copper Or Phosphor Bronze
 Plating: Gold 1.25u" Or 50u" Nickel

Electrical Characteristics
 Current Rating:3.0 AMP
 Insulator Resistance:1000MΩ min.at DC 100V
 Contact Resistance:10mΩ Max.
 Operating Temperature:-40°C~+105°C

Order Information:
 RHTAY09-7.0-1-XX-R-Y


IC Socket
 Plastic Height.
 1.9mm,3.0mm,4.2mm,7.0mm
 Row:1-Single Layer
 2-Double Layer
 XX-No.of 02~80Pin
 Type:S-Straight Pin
 R-Right Angle Pin T-SMT Pin
 Y-Imported Beryllium Copper
 Z-Domestic Phosphor Bronze

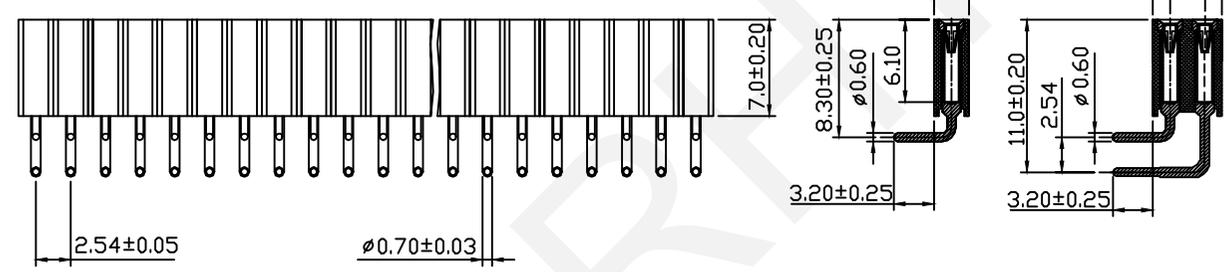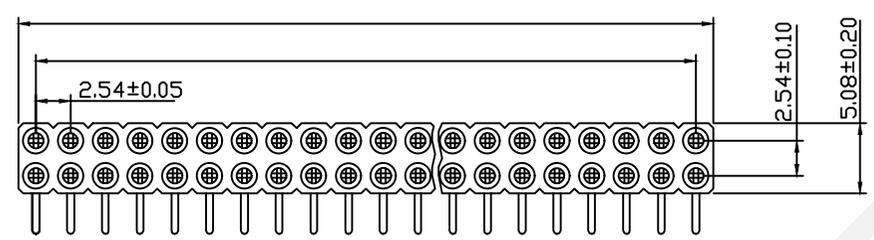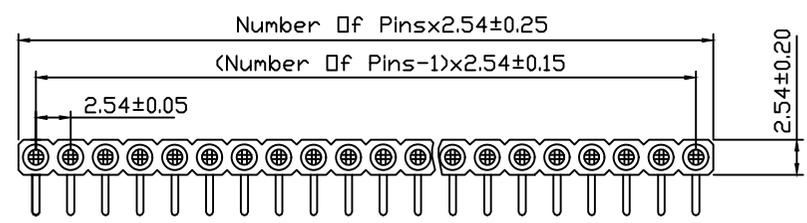


UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	2.54mm Pitch SIP Socket Connector	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAY09-7.0-1-XX-R-Y

THIRD ANGLE PROJECTION



RHTAY09-7.0-1-XX-R-Y

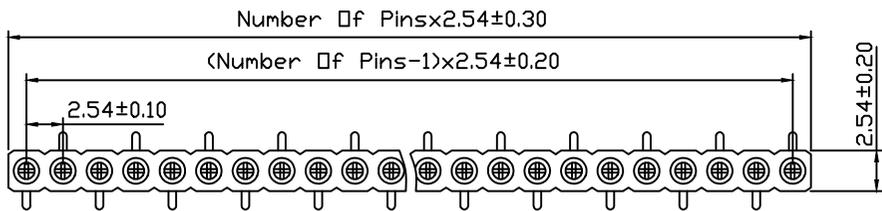

T2 Type

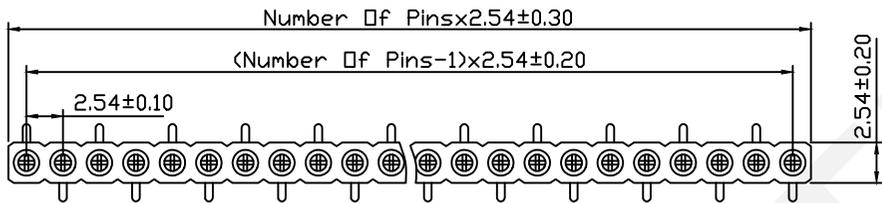

T1 Type

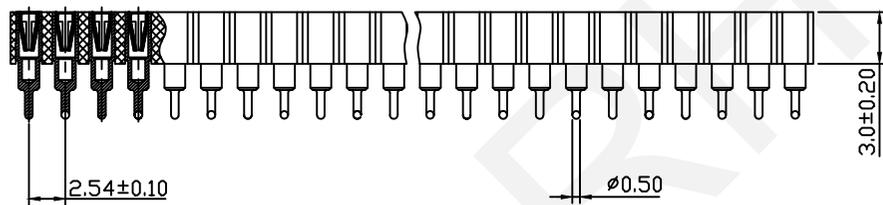

Material:

Housing: 30% Glass filled PPS UL94V-0

Contacts: Beryllium Copper or Phosphor Bronze

Plating: Gold 1.25u" over 50u" Nickel

Electrical Characteristics

Current Rating: 3.0 AMP

Insulator Resistance: 1000MΩ min. at DC 100V

Contact Resistance: 10mΩ Max.

Operating Temperature: -40°C ~ +105°C

Order Information:

RHTAY09-3.0-1-XX-T1-Y

IC Socket

Plastic Height.

1.9mm, 3.0mm, 4.2mm, 7.0mm

Row: 1-Single Layer

2-Double Layer

XX-No. of 02~80 Pin

SMT Type:


T1 Type, T2 Type



Y-Imported Beryllium Copper

Z-Domestic Phosphor Bronze

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	2.54mm Pitch SIP Socket Connector	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAY09-3.0-1-XX-T1-Y



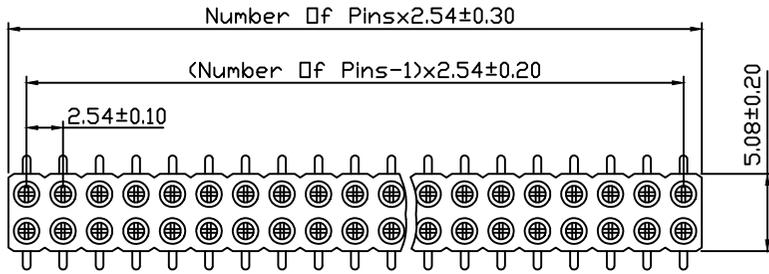

Material:

Housing: 30% Glass filled PPS UL94V-0

Contacts: Beryllium Copper Or Phosphor Bronze

Plating: Gold 1.25u" Over 50u" Nickel



Electrical Characteristics

Current Rating: 3.0 AMP

Insulator Resistance: 1000MΩ min. at DC 100V

Contact Resistance: 10mΩ Max.

Operating Temperature: -40°C ~ +105°C

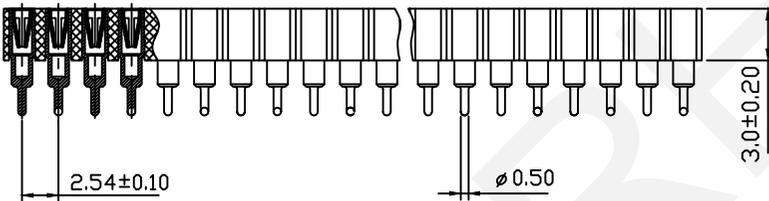

Order Information:

RHTAY09-3.0-2-XX-T-Y

IC Socket

Plastic Height

1.9mm, 3.0mm, 4.2mm, 7.0mm

Row: 1-Single Layer

2-Double Layer

XX-No. of 02~80 Pin

Type: S-Straight Pin

R-Right Angle Pin T-SMT Pin

Y-Imported Beryllium Copper

Z-Domestic Phosphor Bronze

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	2.54mm Pitch SIP Socket Connector	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAY09-3.0-2-XX-T-Y

