


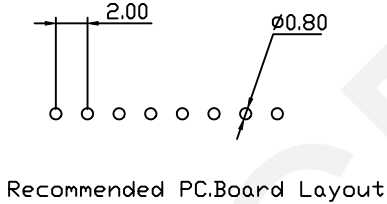
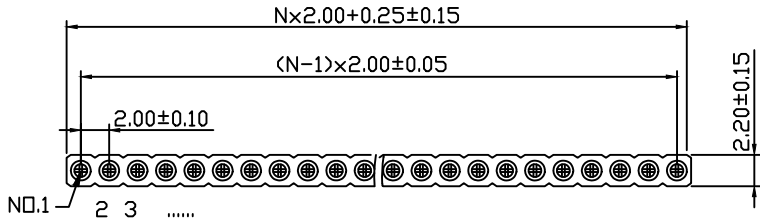


	1	2	3	4	5	6	7	8	9		
A										A	
B										B	
C										C	
D										D	
E										E	
F										F	
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	2.0mm Pitch SIP Socket Connector		THIRD ANGLE PROJECTION  RHTAY09BA-1-XX-S-Y	G
				0~3	3~18	18~50	50~120	CHK'D BY FENG			
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN			
				1	2	3	4	5	6		




Material:
Housing:30%Glass Filled PPS UL94V-0
Contacts:Beryllium Copper Or Phosphor Bronze
Plating: Gold 3u" Over 50u" Nickel



Electrical Characteristics
Current Rating:1.0 AMP
Insulator Resistance:5000MΩ min.at DC 500V
Contact Resistance:20mΩ Max.at DC 100mA
Operating Temperature:-40°C~+105°C

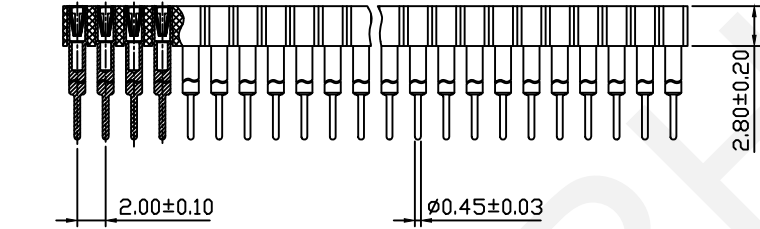

Order Information:
RHTAY09BA-1-XX-S-Y



IC Socket
Row1-Single Layer
2-Double Layer
XX-No.of 01~80Pin
S=Straight Pin 11.2mm
S2=Straight Pin 9.4mm
Y-Imported Beryllium Copper
NONE-Domestic Phosphor Bronze

	1	2	3	4	5	6	7	8	9
A									A
B									B
C									C
D									D
E									E
F									F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	2.0mm Pitch SIP Socket Connector THIRD ANGLE PROJECTION 		G
	1	2	3	4	5	6	7	8	9

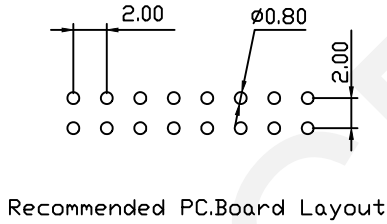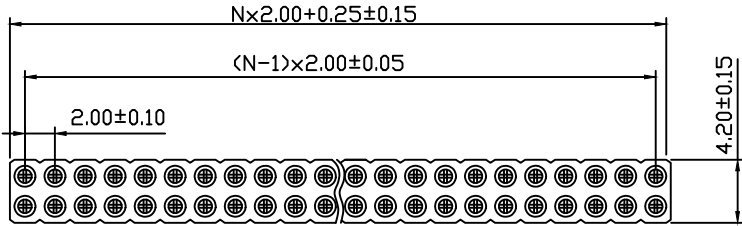


Material:
Housing:30%Glass Filled PPS UL94V-0
Contacts:Beryllium Copper Or Phosphor Bronze
Plating: Gold 3u" Over 50u" Nickel



Electrical Characteristics
Current Rating:1.0 AMP
Insulator Resistance:5000MΩ min.at DC 500V
Contact Resistance:20mΩ Max.at DC 100mA
Operating Temperature:-40°C~+105°C

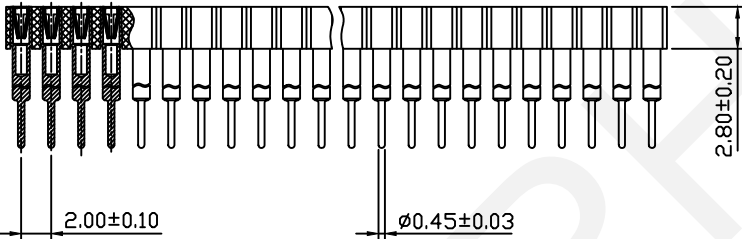

Order Information:
RHTAY09BA-2-XX-S-Y

IC Socket
Row1-Single Layer
2-Double Layer
XX-No.of 01~80Pin
S=Straight Pin 11.2mm
S2=Straight Pin 9.4mm
Y-Imported Beryllium Copper
NONE-Domestic Phosphor Bronze

	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	2.0mm Pitch SIP Socket Connector THIRD ANGLE PROJECTION 		
	1	2	3	4	5	6	7	8	9

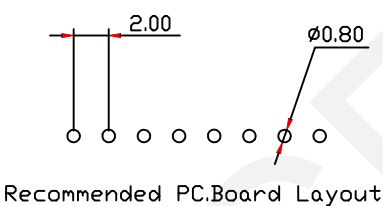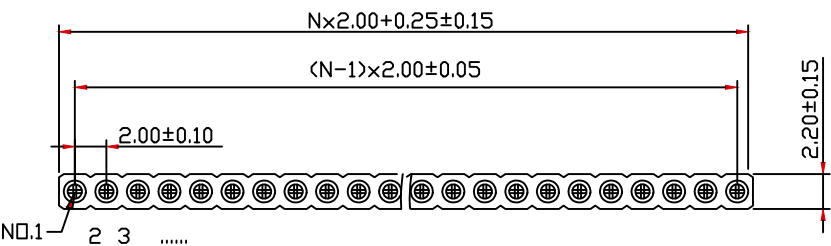

Material:
Housing:30%Glass Filled PPS UL94V-0
Contacts:Beryllium Copper Or Phosphor Bronze
Plating: Gold 3u" Over 50u" Nickel

Electrical Characteristics
Current Rating:1.0 AMP
Insulator Resistance:5000MΩ min.at DC 500V
Contact Resistance:20mΩ Max.at DC 100mA
Operating Temperature:-40°C~+105°C

Order Information:
RHTAY09BA-1-XX-S2-Y
IC Socket
Row:1-Single Layer
2-Double Layer
XX-No.of 01~80Pin
S=Straight Pin 11.2mm
S2=Straight Pin 9.4mm
Y-Imported Beryllium Copper
NONE-Domestic Phosphor Bronze

