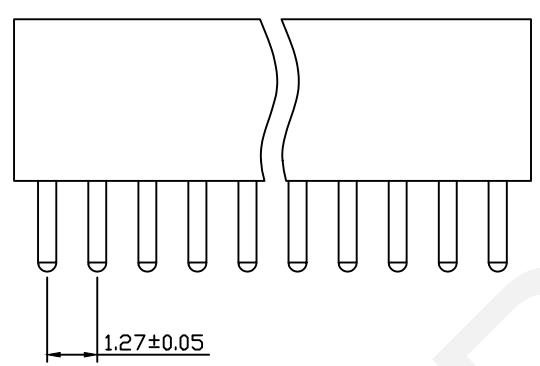
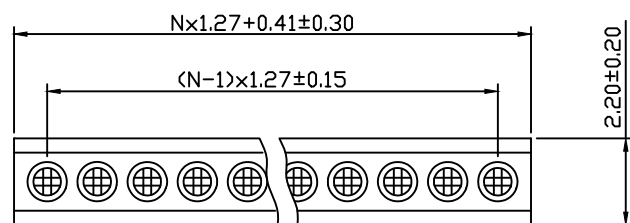


Material:

Housing: PPS UL94V-0

Contacts: Beryllium Copper Or Phosphor Bronze

Plating: Gold 1u" Over 50u" Nickel

Electrical Characteristics

Current Rating: 1.0 AMP

Contact Resistance: 20mΩ Max

Operating Temperature: -40°C ~ +105°C

Order Information:

RHTAY09D-1-XX-S-Y

IC Socket

Row: 1-Single Layer

2-Double Layer

3-Three Layer

XX-No. of 02 ~ 120 Pin

Type: S-Straight

Pin: R-Right Angle Pin T-SMT Pin

Y-Imported Beryllium Copper

NONE-Domestic Phosphor Bronze




NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
		±0.5



DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

1.27mm Pitch SIP Socket Connector



RHTAY09D-1-XX-S-Y

	1	2	3	4	5	6	7	8	9
A									A
B									B
C									C
D									D
E									E
F									F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SCALE:--- 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	1.27mm Pitch SIP Socket Connector THIRD ANGLE PROJECTION 	RHTAY09D-1-XX-T2-Y
	1	2	3	4	5	6	7	8	9

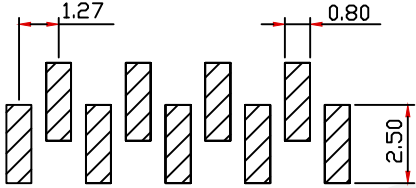
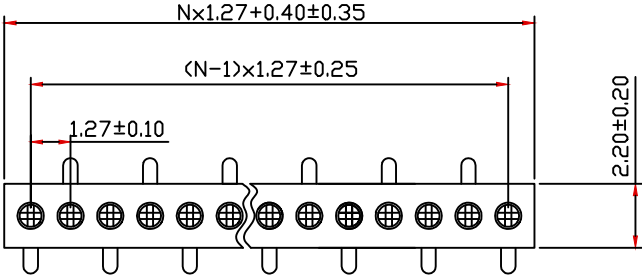





Recommended PC.Board Layout

Material:
Housing: PPS UL94V-0
Contacts: Beryllium Copper Or Phosphor Bronze
Plating: Gold 1u" Over 50u" Nickel

Electrical Characteristics
Current Rating: 1.0 AMP
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C ~ +105°C

Order Information:
RHTAY09D-1-XX-T2-Y
IC Socket
Row: 1-Single Layer
2-Double Layer
3-Three Layer
XX-No. of 02~120 Pin
Type: S-Straight
Pin: R-Right Angle Pin T2-SMT Pin
Y-Imported Beryllium Copper
NONE-Domestic Phosphor Bronze

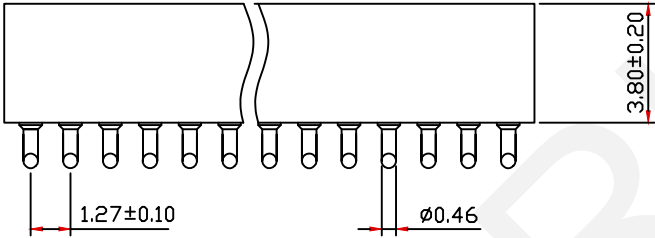

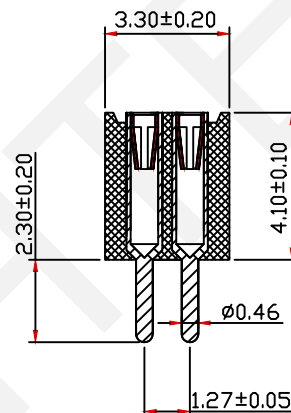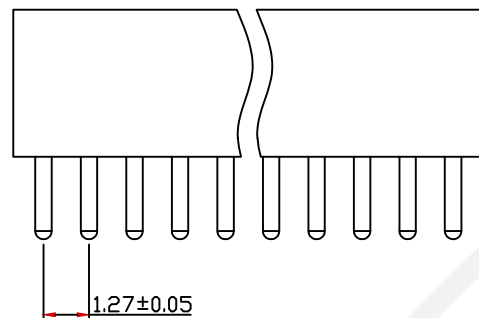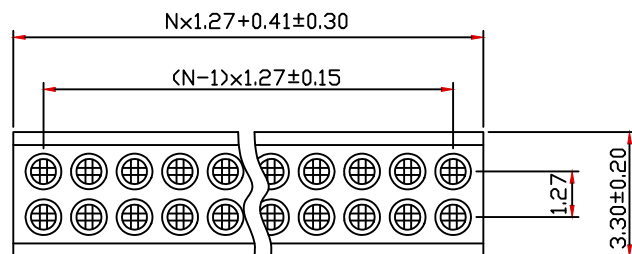

Material:

Housing: PPS UL94V-0

Contacts: Beryllium Copper Or Phosphor Bronze

Plating: Gold 1u" Over 50u" Nickel

Electrical Characteristics

Current Rating: 1.0 AMP

Contact Resistance: $20m\Omega$ Max

Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Order Information:

RHTAY09D-2-XX-S-Y

IC Socket

Row: 1-Single Layer

2-Double Layer

3-Three Layer

XX-No. of 02~120 Pin

Type: S-Straight

Pin: R-Right Angle Pin T-SMT Pin

Y-Imported Beryllium Copper

NONE-Domestic Phosphor Bronze



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27mm Pitch SIP Socket Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAY09D-2-XX-S-Y


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN

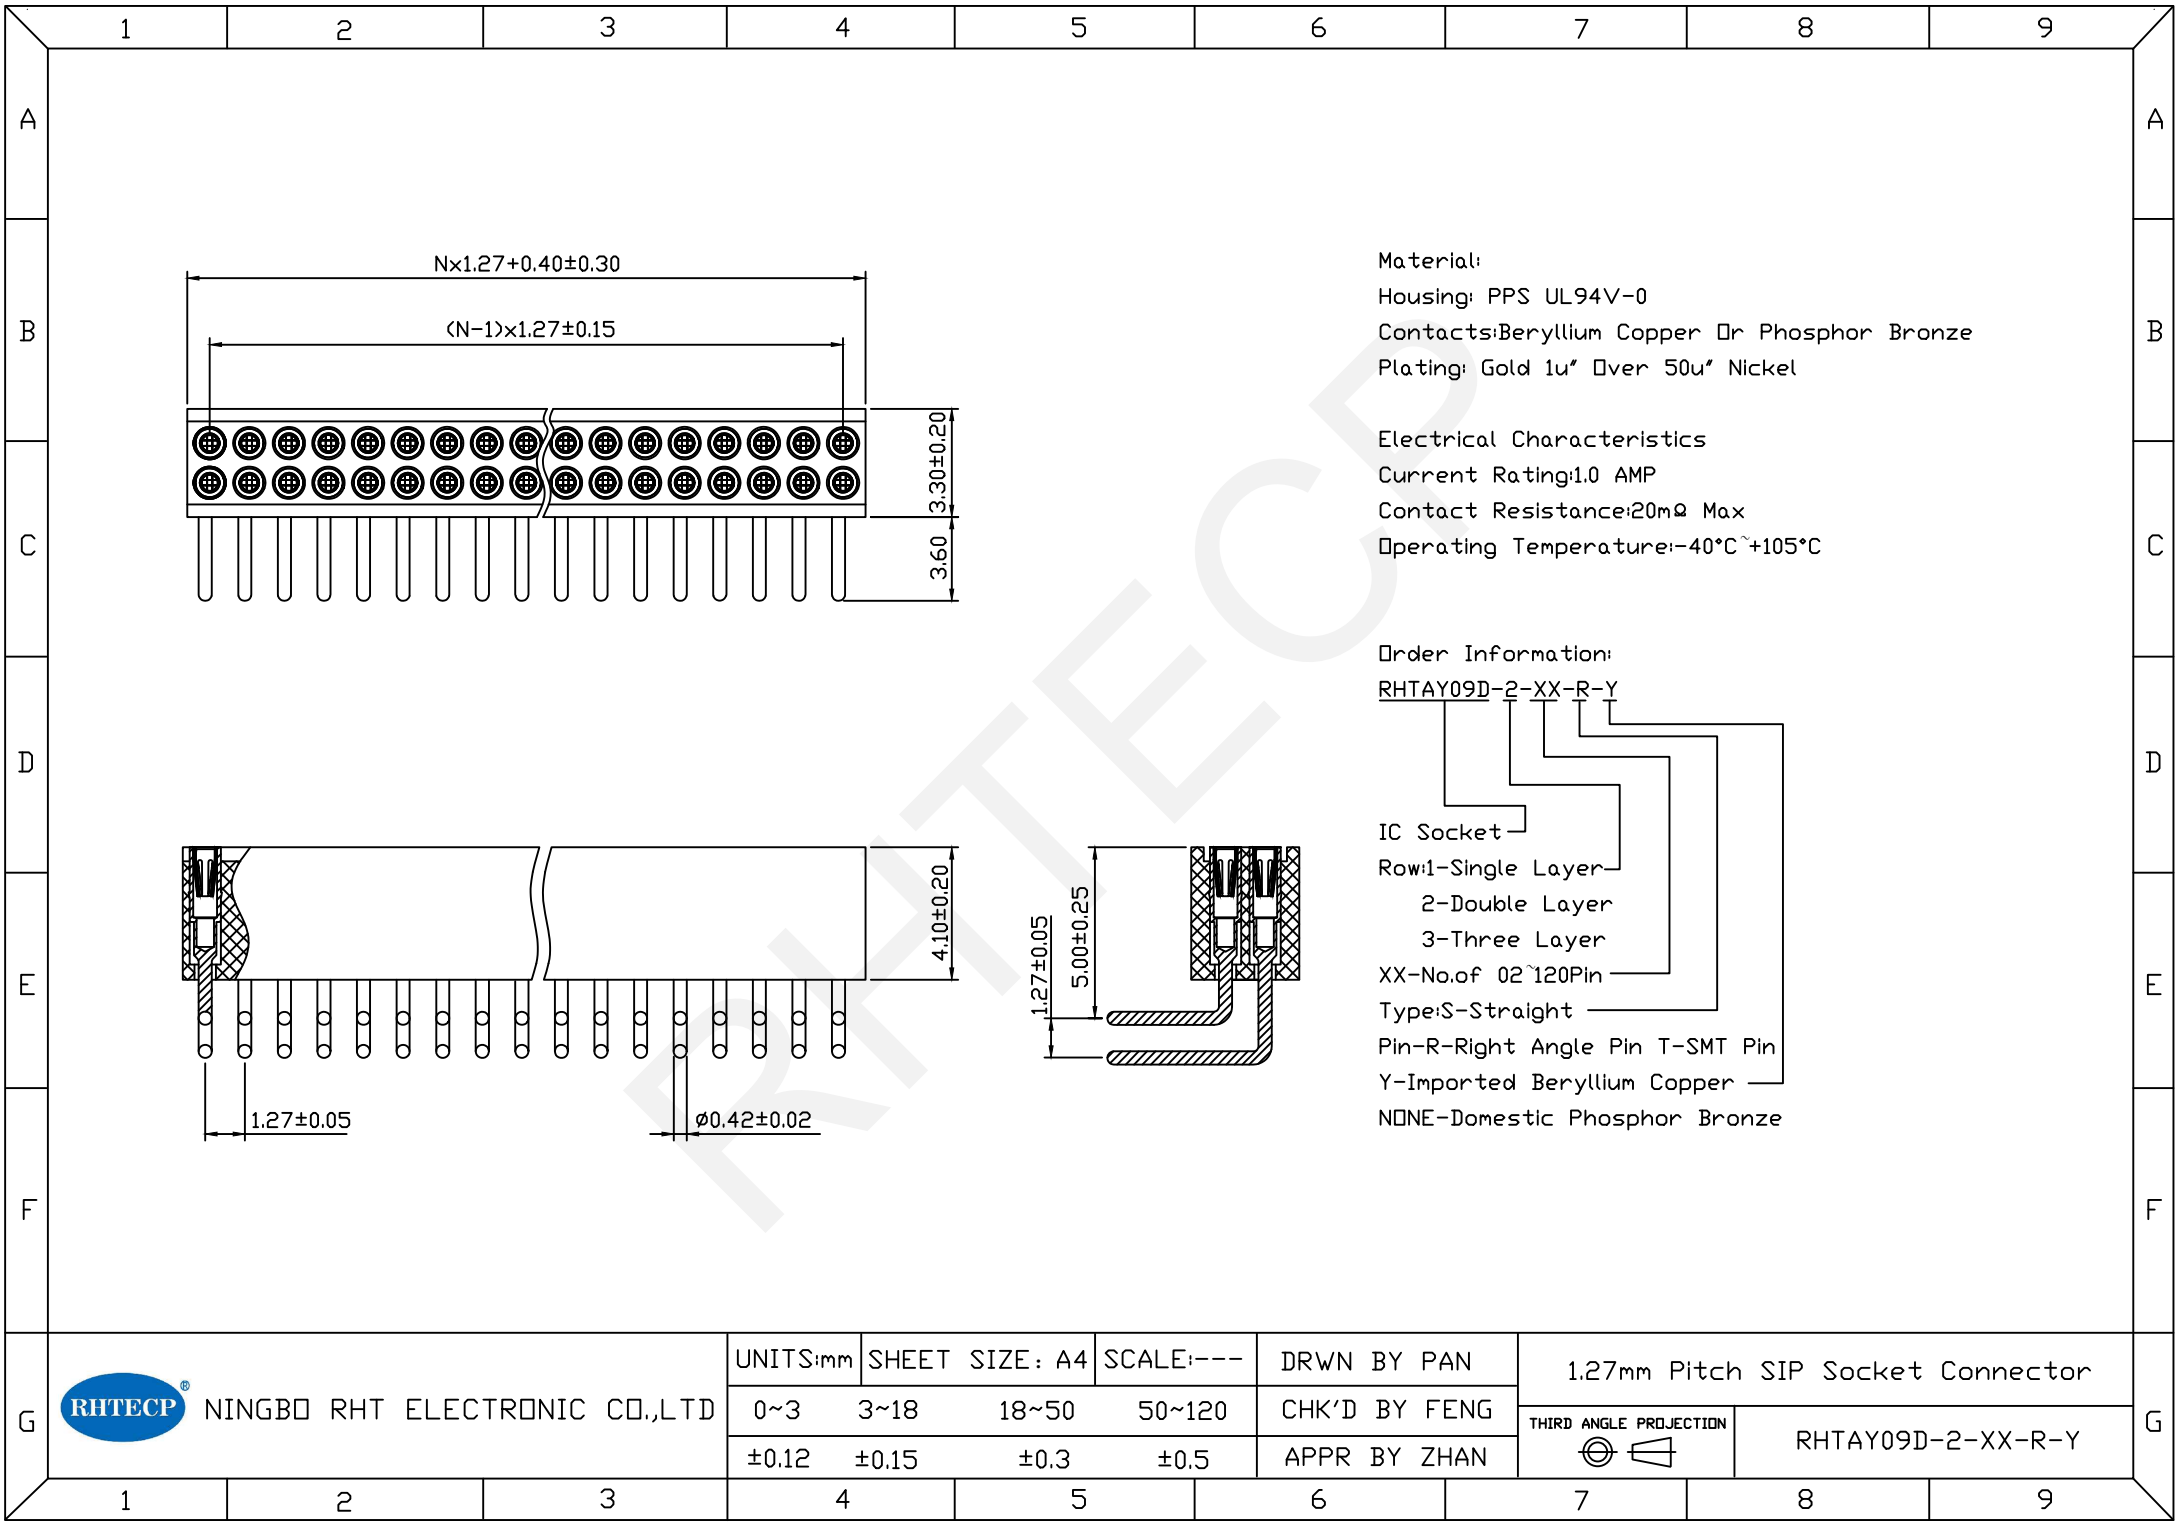

Material:
Housing: PPS UL94V-0
Contacts: Beryllium Copper Or Phosphor Bronze
Plating: Gold 1u" Over 50u" Nickel

Electrical Characteristics
Current Rating: 1.0 AMP
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C ~ +105°C

Order Information:
RHTAY09D-2-XX-R-Y

IC Socket
Row: 1-Single Layer
2-Double Layer
3-Three Layer
XX-No. of 02~120 Pin
Type: S-Straight
Pin: R-Right Angle Pin T-SMT Pin
Y-Imported Beryllium Copper
NONE-Domestic Phosphor Bronze



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG



APPR BY ZHAN

1.27mm Pitch SIP Socket Connector



THIRD ANGLE PROJECTION



RHTAY09D-2-XX-R-Y

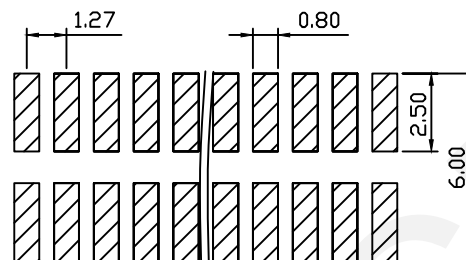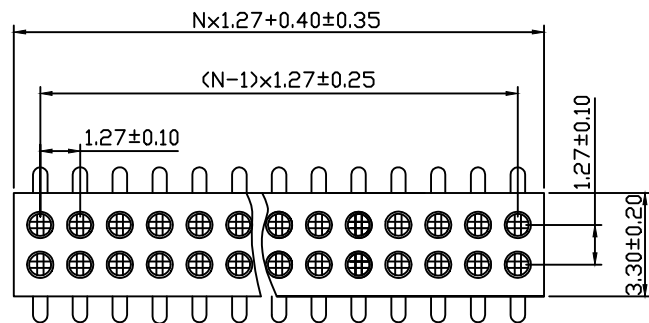

Recommended PC Board Layout

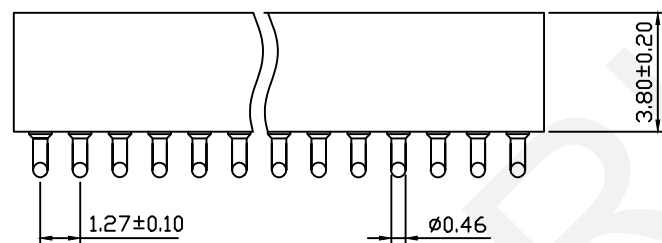

Material:

Housing: PPS UL94V-0

Contacts: Beryllium Copper Or Phosphor Bronze

Plating: Gold 1u" Over 50u" Nickel

Electrical Characteristics

Current Rating: 1.0 AMP

Contact Resistance: 20mΩ Max

Operating Temperature: -40°C ~ +105°C

Order Information:

RHTAY09D-2-XX-T-Y

IC Socket

Row: 1-Single Layer

2-Double Layer

3-Three Layer

XX-No. of 02 ~ 120 Pin

Type: S-Straight

Pin: R-Right Angle Pin T-SMT Pin

Y-Imported Beryllium Copper

NONE-Domestic Phosphor Bronze



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27mm Pitch SIP Socket Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAY09D-2-XX-T-Y

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN