
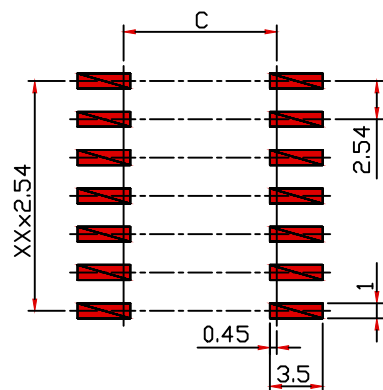
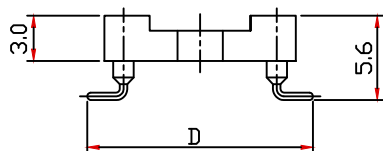


RoHS Compliance

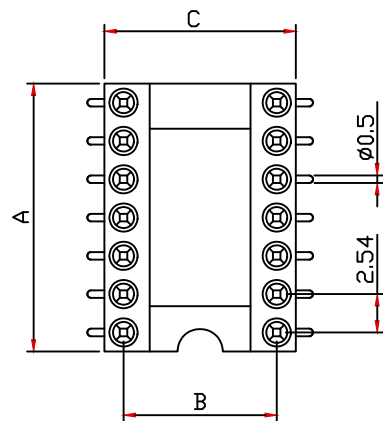

Position	A	B	C	D
06	7.6	7.62	10.1	12.26
08	10.1	7.62	10.1	12.26
10	12.6	7.62	10.1	12.26
12	15.2	7.62	10.1	12.26
14	17.7	7.62	10.1	12.26
16	20.3	7.62	10.1	12.26
18	22.8	7.62	10.1	12.26
20	25.3	7.62	10.1	12.26
22	27.8	7.62	10.1	12.26
24	30.4	7.62	10.1	12.26
28	35.5	7.62	10.1	12.26

24	30.5	15.24	17.7	19.88
28	35.5	15.24	17.7	19.88
32	40.6	15.24	17.7	19.88
36	45.7	15.24	17.7	19.88
40	50.8	15.24	17.7	19.88
42	53.3	15.24	17.7	19.88
48	60.9	15.24	17.7	19.88

Material:

Housing:PBT UL94V~0

Contacts:Beryllium Copper Or Phosphor Bronze

Plating: Au 2u" Or Sn Over 50u" Nickel

Electrical Characteristics.

Current Rating:3.0 AMP

Insulator Resistance:1000MΩ min

Contact Resistance: 20mΩ max.

Operating Temperature:-40°C~+105°C

Order information:

RHTAY17T-XX-Z-1

IC Socket

XX-No.of 06~48pin

Material:

Y-Imported Beryllium copper

Z-Domestic Phosphor Bronze

B Size:1=7.62mm 3=15.24mm

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.54mm Pitch IC Socket Connector SMT Type

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY17T-XX-Z-1