


RoHS Compliance

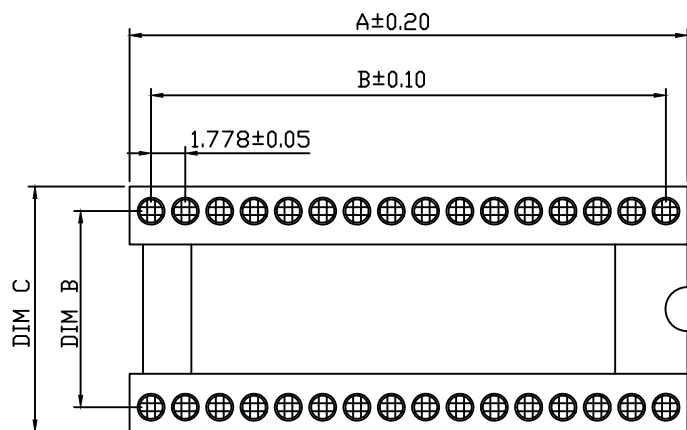



Position	A	B	C
24	21.80	10.16	12.70
28	25.20	10.16	12.70
30	27.00	10.16	12.70
32	28.80	10.16	12.70
48	43.10	10.16	12.70
20	18.10	15.24	17.64
24	21.70	15.24	17.64
28	25.20	15.24	17.64
40	35.80	15.24	17.64
48	43.10	15.24	17.64
52	46.70	15.24	17.64
56	50.20	15.24	17.64
64	57.30	15.24	17.64
68	60.90	15.24	17.64
64	57.30	19.05	21.45

Material:
Housing:PBT UL94V~0
Contacts:Beryllium Copper Or Phosphor Bronze
Plating:1u" Or Sn Over 50u" Nickel

Electrical Characteristics.
Current Rating:1.0 AMP
Insulator Resistance:1000MΩ min
Contact Resistance: 20mΩ max.
Operating Temperature:-40°C~+105°C
Order information:

RHTAYB17B-XX-1-Y

IC Socket
XX-No.of 24~64pin
B-Size:1=10.16mm
2=15.24mm 3=19.05mm
Y-Imported Beryllium Copper
NONE-Domestic Phosphor Bronze

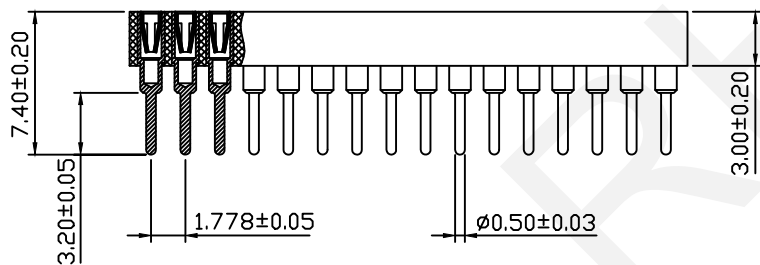

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---
0~3 3~18 18~50 50~120
±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

1.778mm Pitch IC Socket Connector

THIRD ANGLE PROJECTION
⊕

RHTAYB17B-XX-1-Y