

Positions	A	B	C	D
48	75.6	71.2	58.42	43.2
40	65.5	61.0	48.26	33.18
32	55.3	50.9	38.1	23.0
28	50.2	45.8	33.02	17.86
24	45.1	40.7	27.9	13.10

Specification

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Phosphor Bronze

Plating: Gold plated: 3u" over 50u" nickel

Tin plated: 100u" over 50u" nickel

Electrical Characteristics:

Current rating: 1AMP.

Insulator resistance: 5000MΩmin, at DC 500V

Contact resistance: 20MΩmax, at DC 100mA

Operating Temperature: -55°C~+105°C

Features:

For DIPs with .070" lead spacing

Lever actuated zero insertion force mechanism


Socket easily disassembles for repair ability

ORDER INFORMATION

Product No: RHTAY08M-24

ZIP Strip Sockets 2.54mm

Number of Contacts: XX=24-48Pin

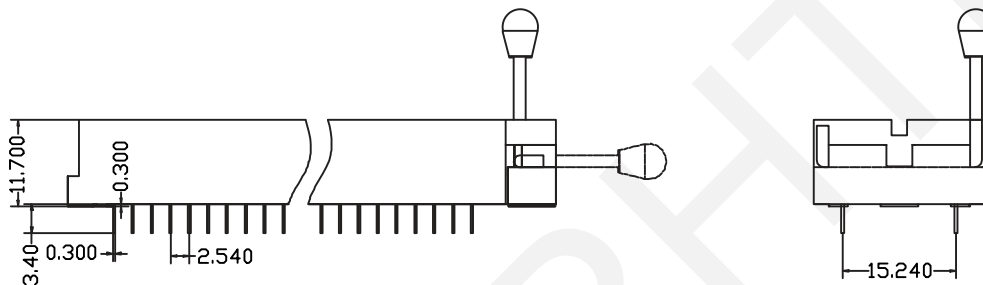

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

ZIP Strip Sockets 2.54mm(0.100")

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY08M