



Positions	A	B	C
28	43.0	37.8	26.2
40	54.8	50.7	38.0

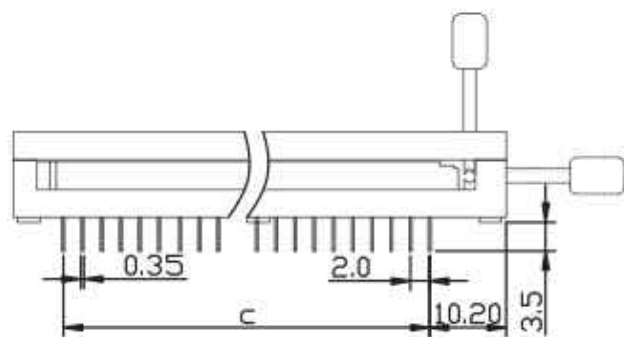

Specification

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Phosphor Bronze

Plating: Gold plated: 3u" over 50u" nickel

Tin plated: 100u" over 50u" nickel

Electrical Characteristics:

Current rating: 1AMP.

Insulator resistance: 5000MΩ min, at DC 500V

Contact resistance: 20mΩ max, at DC 100mA

Operating Temperature: -55°C~+105°C

Features:

Lever actuated zero insertion force mechanism

Socket easily disassembles for repair ability

ORDER INFORMATION

Product No: RHTAY08N-24

ZIP Strip Sockets 2.54mm

Number of Contacts 28-40Pin

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

ZIP Strip Sockets 2.00mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY08N