



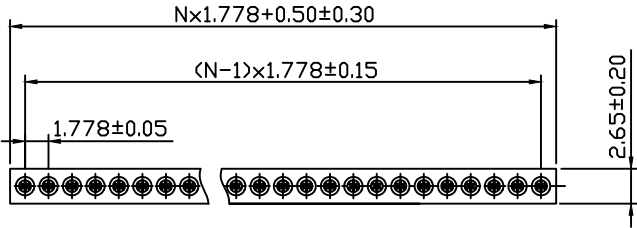


	1	2	3	4	5	6	7	8	9		
A										A	
B										B	
C										C	
D										D	
E										E	
F										F	
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	1.778mm Pitch SIP Socket Connector			G
				0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 	RHTAY09C-1-XX-S1-Y	
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN			
	1	2	3	4	5	6	7	8	9		





Recommended PC.Board Layout

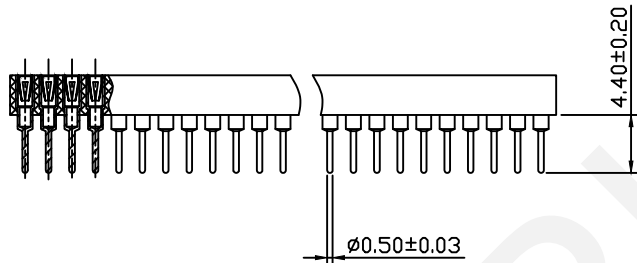

Material:
Housing:30%Glass Filled PBTUL94 V-0
Contacts:Beryllium Copper Or Phosphor Bronze
Plating: Gold 1.25u" Over 50u" Nickel

Electrical Characteristics
Current Rating:1.0 AMP
Insulator Resistance:1000MΩ min
Contact Resistance:20mΩ Max
Operating Temperature:-40°C~+105°C



Order Information:
RHTAY09C-1-XX-S1-Y
IC Socket
Row1-Single Layer
2-Double Layer
XX-No.of 01~80Pin
Straight Pin
S1=7.4mm S2=11.7mm S3=14.0mm
Y-Imported Beryllium Copper
NONE-Domestic Phosphor Bronze

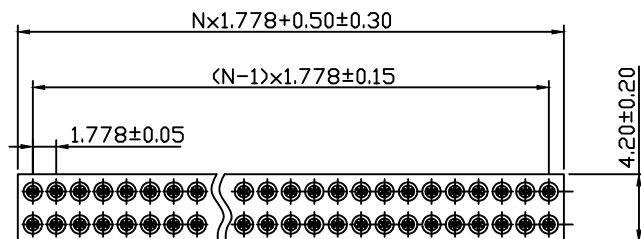

Material:
Housing: 30% Glass Filled PBT UL94 V-0
Contacts: Beryllium Copper Or Phosphor Bronze
Plating: Gold 1.25u" Over 50u" Nickel

Electrical Characteristics
Current Rating: 1.0 AMP
Insulator Resistance: 1000MΩ min
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C ~ +105°C

Recommended PC Board Layout

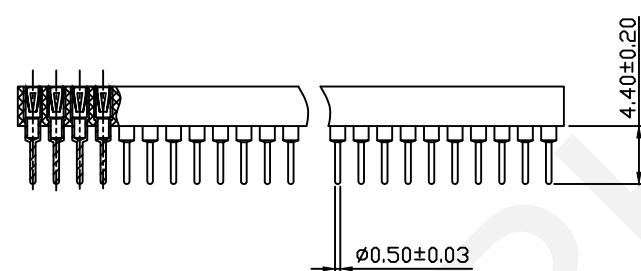


Order Information:
RHTAY09C-2-XX-S1-Y

IC Socket
Row 1-Single Layer
2-Double Layer
XX-No. of 01~80 Pin
Straight Pin
S1=7.4mm S2=11.7mm S3=14.0mm
Y-Imported Beryllium Copper
NONE-Domestic Phosphor Bronze



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	1.778mm Pitch SIP Socket Connector	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	



RHTAY09C-2-XX-S1-Y