




	1	2	3	4	5	6	7	8	9
A									A
B									B
C									C
D									D
E									E
F									F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	2.54mm IC Swiss Round Pin Header Connector THIRD ANGLE PROJECTION 	RHTAY09X-1-XX-S
	1	2	3	4	5	6	7	8	9

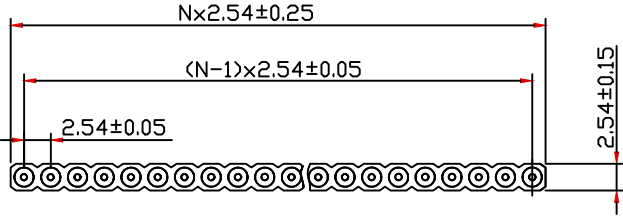


Material:
Housing:30%Glass Filled PPS UL94V-0
Contacts:Brass
Plating: Gold Plated Over 50u" Nickel

Electrical Characteristics
Current Rating:3.0 AMP
Voltage Rating: 60V AC/DC
Insulator Resistance:1000MΩ min at 100V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40°C~+105°C

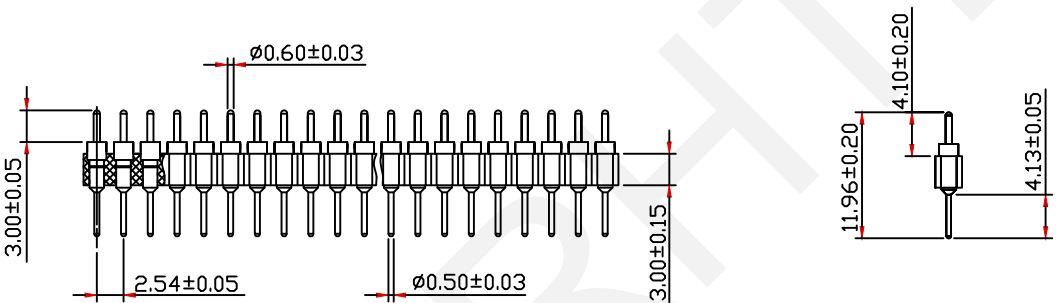

Order Information:
RHTAY09X-1-XX-S

IC Socket
Row:1-Single Layer
 2-Double Layer
XX-No.of 01~80Pin
Straight Pin
S1=11.96mm S2=10.0mm

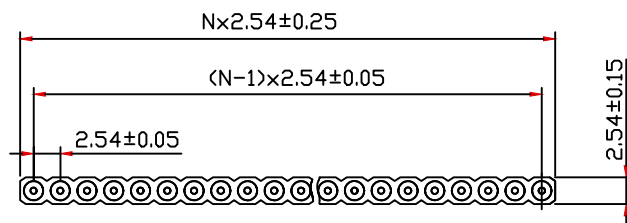

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Plating: Gold Plated Over 50u" Nickel

Electrical Characteristics


Current Rating: 3.0 AMP

Voltage Rating: 60V AC/DC

Insulator Resistance: 1000MΩ min at 100V AC

Contact Resistance: 20mΩ Max

Operating Temperature: -40°C ~ +105°C

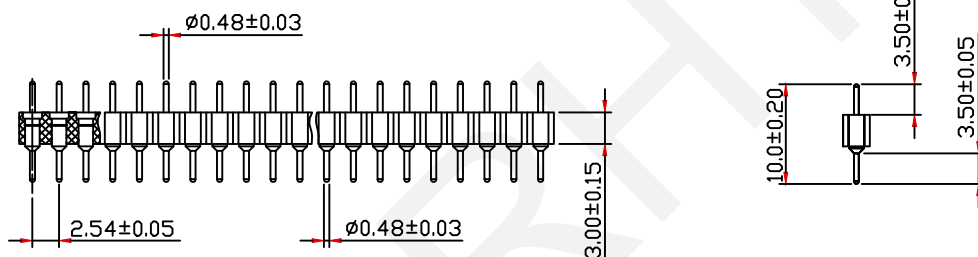

Order Information:

RHTAY09X-1-XX-S2

IC Socket

Row: 1-Single Layer

2-Double Layer

XX-No. of 01~80 Pin

Straight Pin

S1=11.96mm S2=10.0mm



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.54mm IC Swiss Round Pin Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15



±0.3

±0.5

APPR BY ZHAN





RHTAY09X-1-XX-S2

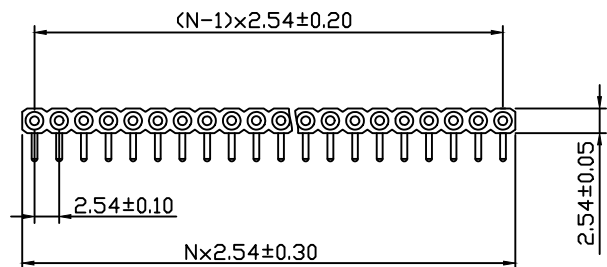

Material:
Housing: 30% Glass Filled PPS UL94V-0
Contacts: Brass
Plating: Gold Plated Over 50u" Nickel

Electrical Characteristics
Current Rating: 3.0 AMP
Voltage Rating: 60V AC/DC
Insulator Resistance: 1000MΩ min at 100V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C ~ +105°C

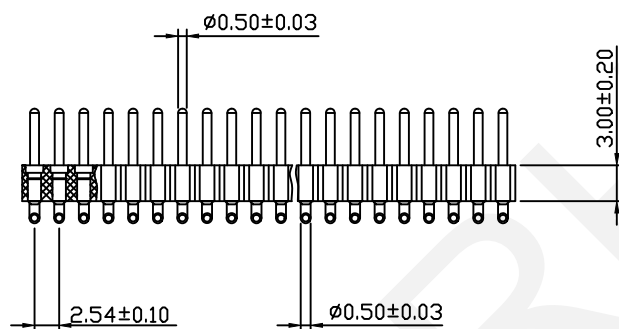

Order Information:

RHTAY09X-1-XX-R

IC Socket
Row 1-Single Layer
2-Double Layer
XX-No. of 01~80 Pin
R-Right Angle Pin



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.54mm IC Swiss Round Pin Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15





±0.3

±0.5

APPR BY ZHAN



RHTAY09X-1-XX-R

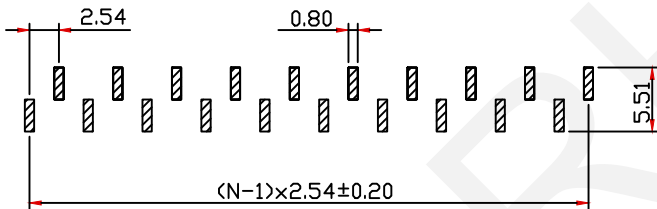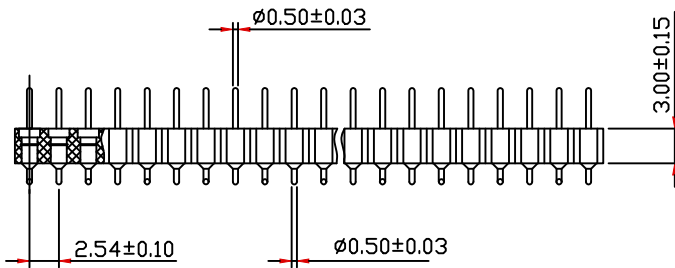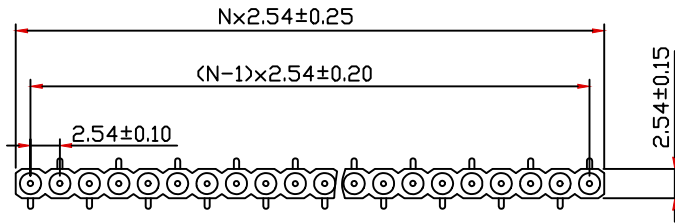

Recommended PC.Board Layout

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Plating: Gold Plated Over 50u" Nickel

Electrical Characteristics

Current Rating: 3.0 AMP

Voltage Rating: 60V AC/DC

Insulator Resistance: 1000MΩ min at 100V AC

Contact Resistance: 20mΩ Max

Operating Temperature: -40°C ~ +105°C

Order Information:

RHTAY09X-1-XX-T2


IC Socket

Row: 1-Single Layer

2-Double Layer

XX-No. of 01~80 Pin

T2-SMT Pin

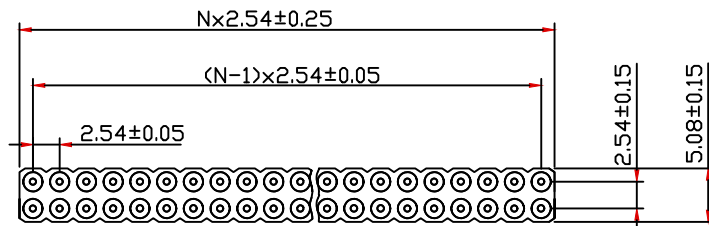

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Plating: Gold Plated Over 50u" Nickel

Electrical Characteristics


Current Rating: 3.0 AMP

Voltage Rating: 60V AC/DC

Insulator Resistance: 1000M Ω min at 100V AC

Contact Resistance: 20m Ω Max

Operating Temperature: -40°C ~ +105°C

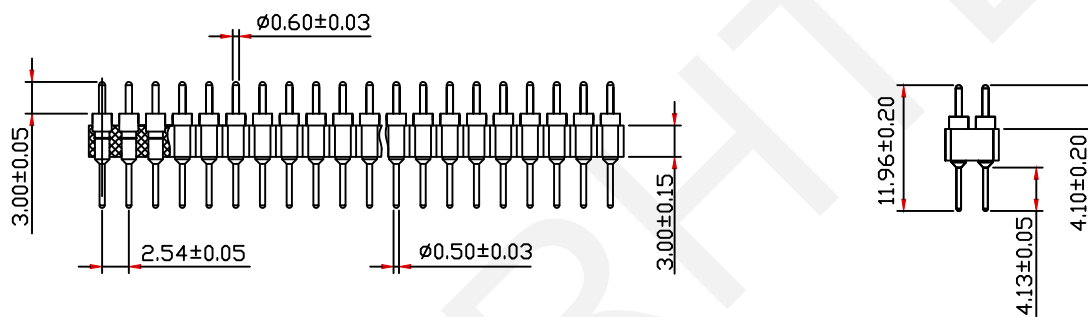

Order Information:

RHTAY09X-2-XX-S

IC Socket

Row: 1-Single Layer

2-Double Layer

XX-No. of 01~80 Pin

Straight Pin

S1=11.96mm S2=10.0mm



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.54mm IC Swiss Round Pin Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN



RHTAY09X-2-XX-S

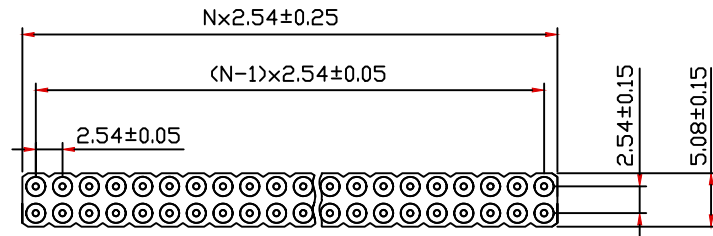

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Plating: Gold Plated Over 50u" Nickel

Electrical Characteristics



Current Rating: 3.0 AMP

Voltage Rating: 60V AC/DC

Insulator Resistance: 1000M Ω min at 100V AC

Contact Resistance: 20m Ω Max

Operating Temperature: -40°C ~ +105°C

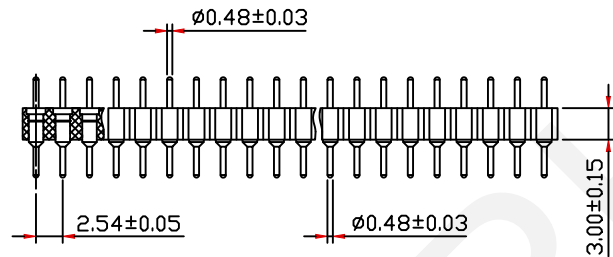

Order Information:

RHTAY09X-2-XX-S2

IC Socket

Row: 1-Single Layer

2-Double Layer

XX-No. of 01~80 Pin

Straight Pin

S1=11.96mm S2=10.0mm



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.54mm IC Swiss Round Pin Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


± 0.12

± 0.15



± 0.3

± 0.5

APPR BY ZHAN



RHTAY09X-2-XX-S2

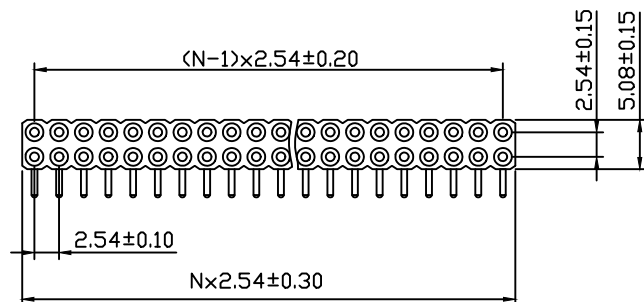

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Plating: Gold Plated Over 50u" Nickel

Electrical Characteristics


Current Rating: 3.0 AMP

Voltage Rating: 60V AC/DC

Insulator Resistance: 1000MΩ min at 100V AC

Contact Resistance: 20mΩ Max

Operating Temperature: -40°C ~ +105°C

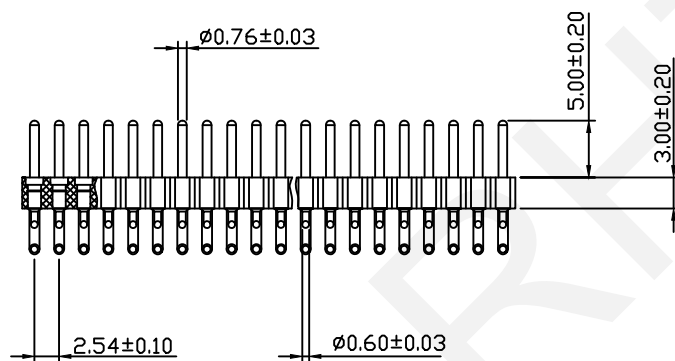

Order Information:

RHTAY09X-2-XX-R

IC Socket

Row: 1-Single Layer

2-Double Layer

XX-No. of 01~80Pin

R-Right Angle Pin



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.54mm IC Swiss Round Pin Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15



±0.3

±0.5

APPR BY ZHAN





RHTAY09X-2-XX-R

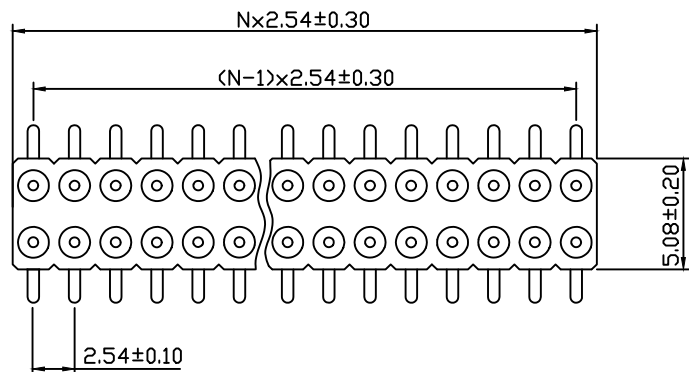

Recommended PC Board Layout

Material:
Housing: 30% Glass Filled PPS UL94V-0
Contacts: Brass
Plating: Gold Plated Over 50u" Nickel

Electrical Characteristics
Current Rating: 3.0 AMP
Voltage Rating: 60V AC/DC
Insulator Resistance: 1000MΩ min at 100V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C ~ +105°C

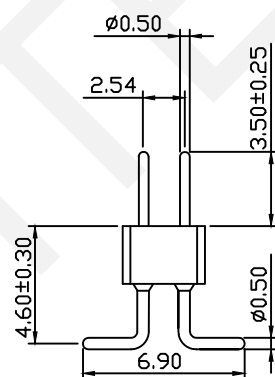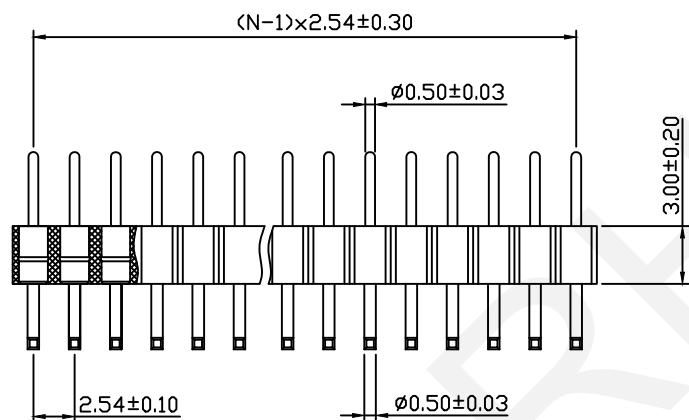

Order Information:

RHTAY09X-2-XX-T

IC Socket

Row: 1-Single Layer

2-Double Layer

XX-No. of 01~80 Pin

T-SMT Pin



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.54mm IC Swiss Round Pin Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY09X-2-XX-T