

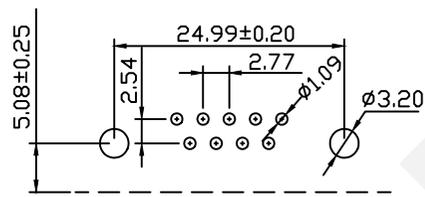
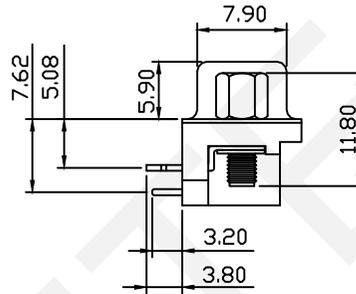
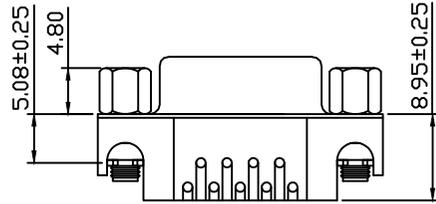


RoHS Compliant

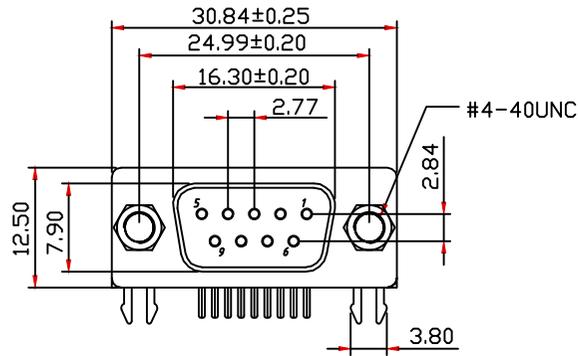

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

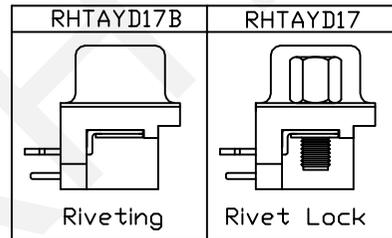

Material:

Housing:PBT+30% Glass Filled,UL94V-0
Contacts:Brass,Gold Plating
Shell:Steel,Nickel Plating,

Electrical Characteristics:

Current Rating:5 AMP
Insulator Resistance1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) For 1 Minute
Contact Resistance:20MΩ Max. Initial
Operating Temperature:-55°C~+105°C

Order Information:

RHTAYD17-XX-F-X

Type:D17 Or D17B

Number of Contacts:

Connector type: F-Female





Housing Color:B-Black L-Blue

RHTECP NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4		SCALE:---		DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

D-SUB Connector,R/A,
Through Hole,5.08mm,9P Female
THIRD ANGLE PROJECTION
 RHTAYD17-XX-F-X

RoHS Compliant

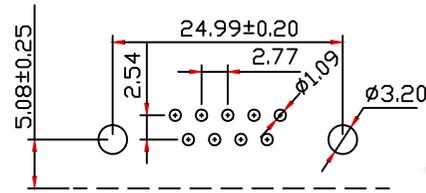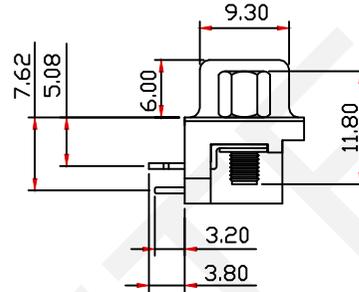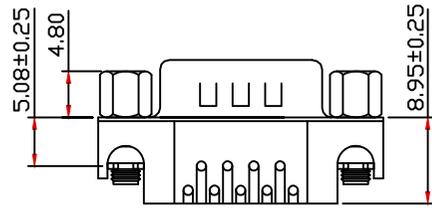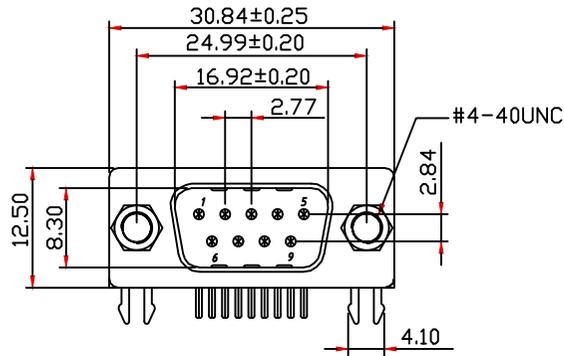

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

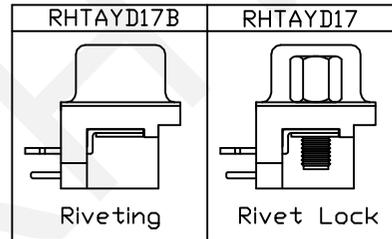

Material:

Housing: PBT+30% Glass Filled, UL94V-0
Contacts: Brass, Gold Plating
Shell: Steel, Nickel Plating,

Electrical Characteristics:

Current Rating: 5 AMP
Insulator Resistance: 1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) For 1 Minute
Contact Resistance: 20MΩ Max. Initial
Operating Temperature: -55°C ~ +105°C

Order Information:

RHTAYD17-XX-M-X

Type: D17 Or D17B

Number of Contacts:

Connector type: M-Male

Housing Color: B-Black L-Blue

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE: ---		DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

D-SUB Connector, R/A,
Through Hole, 5.08mm, 9P Male

RHTAYD17-XX-M-X