


RoHS Compliant

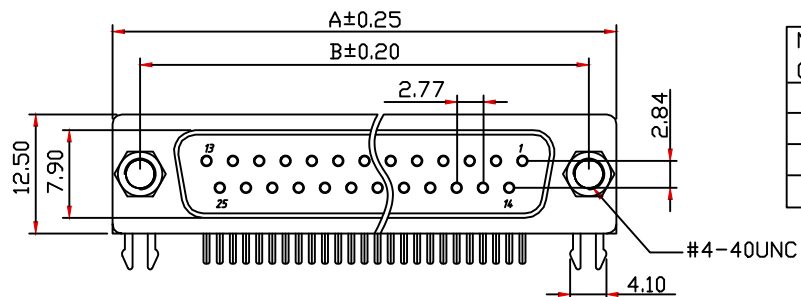

Number Of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.80	24.99	16.30
15	39.20	33.30	24.60
25	53.10	47.04	38.30
37	69.34	63.50	54.80

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass, Gold Plating

Shell: Steel, Nickel Plating,

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20MΩ Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

RHTAYE15-XX-F-X




D-SUB Connector,

2 Row R/A Through Hole


Number of Contacts:

Connector type: F-Female

Housing Color: B-Black

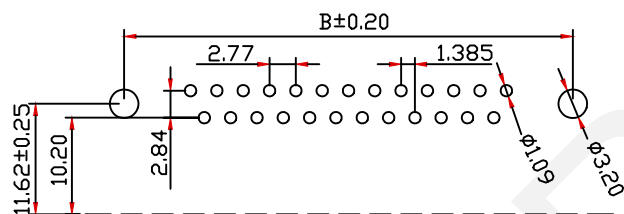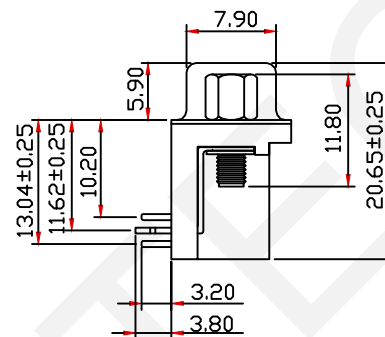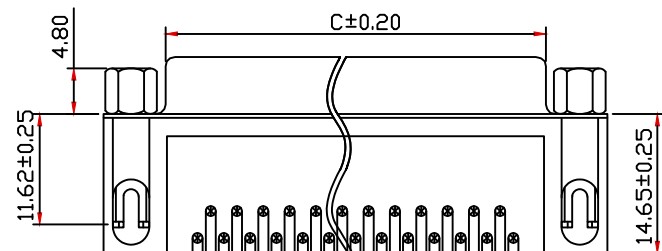

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

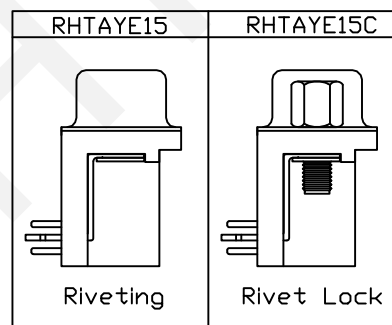

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN


D-SUB Connector, R/A,
Through Hole, 9.4mm, Female

THIRD ANGLE PROJECTION



RHTAYE15-XX-F-X

RoHS Compliant

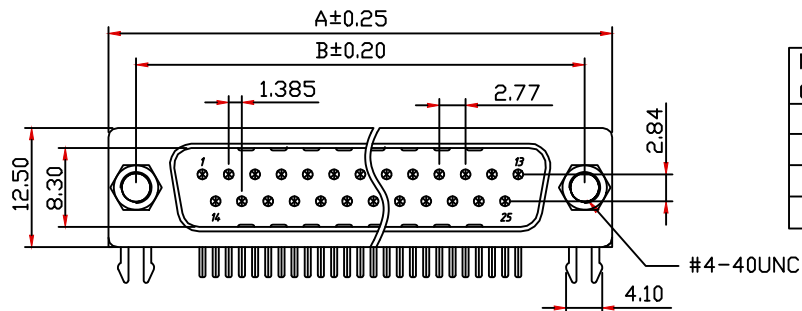

Number Of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.80	24.99	16.90
15	39.20	33.30	25.25
25	53.10	47.04	38.96
37	69.34	63.50	55.42

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass, Gold Plating

Shell: Steel, Nickel Plating,

Electrical Characteristics:



Current Rating: 5 AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20MΩ Max. Initial

Operating Temperature: -55°C~+105°C

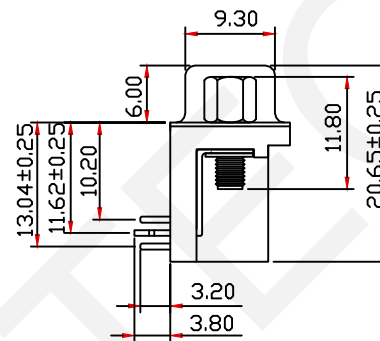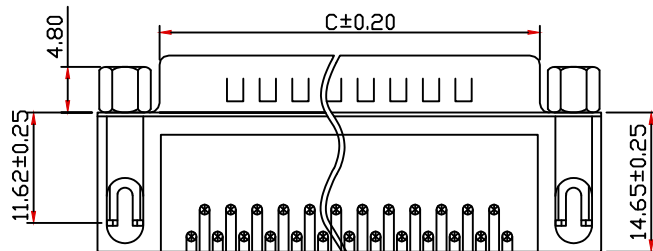

Order Information:

RHTAYE15-XX-M-X


D-SUB Connector,

2 Row R/A Through Hole


Number of Contacts:

Connector type: M-Male

Housing Color: B-Black

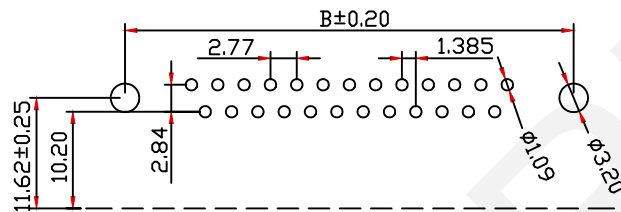

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

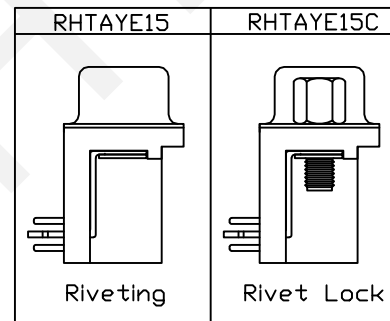

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

D-SUB Connector, R/A,
Through Hole, 9.4mm, Male

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYE15-XX-M-X

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN