

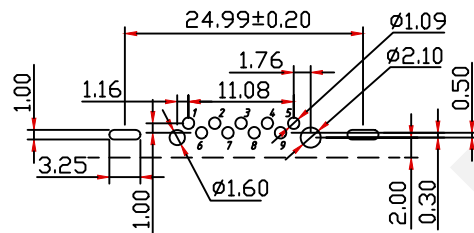
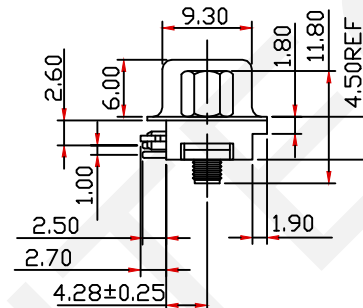
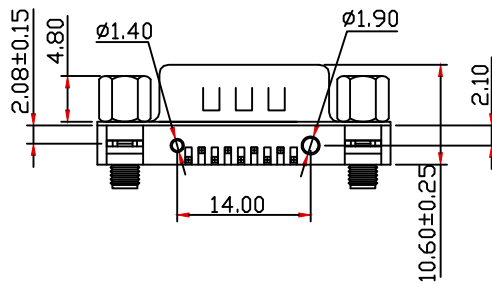


RoHS Compliant

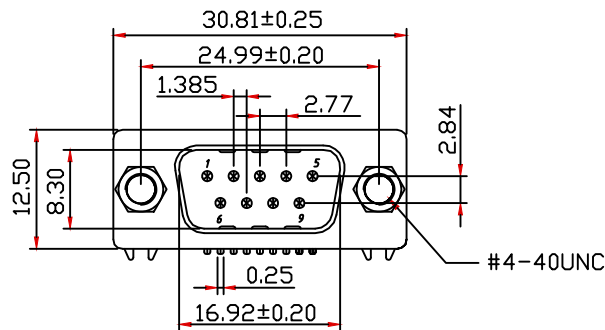

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

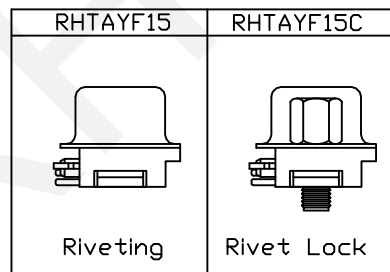

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass, Gold Plating

Shell: Steel, Nickel Plating,

Electrical Characteristics:

Current Rating: 3 AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 25MΩ Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

RHTAYF15-09-M-X

Slim D-SUB Connector,

2 Row R/A Through Hole

Number of Contacts: 09-9Pin

Connector type: M-Male

Housing Color: B-Black

L-Blue E-Green

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Slim D-SUB Connector, R/A,
Through Hole, 2.50mm, Male

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3





±0.5

APPR BY ZHAN




RHTAYF15-09-M-X

RoHS Compliant

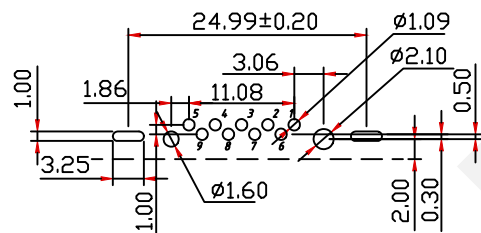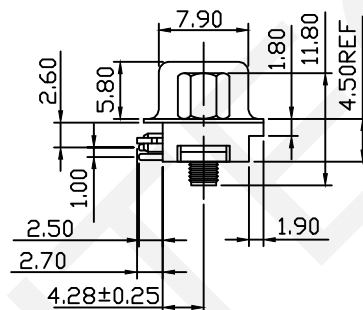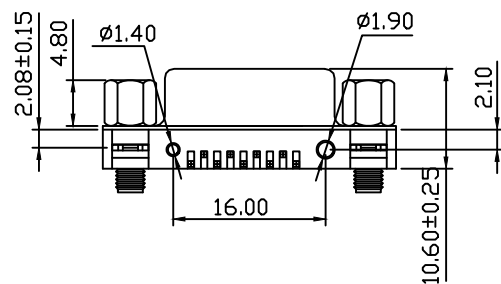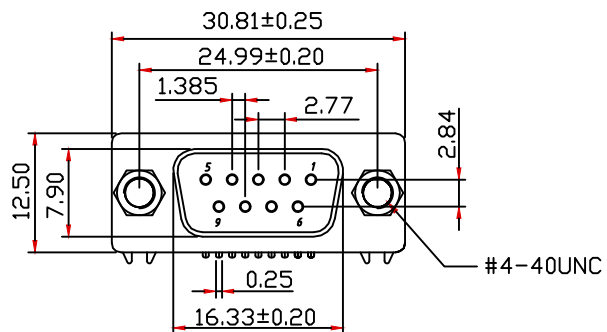

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

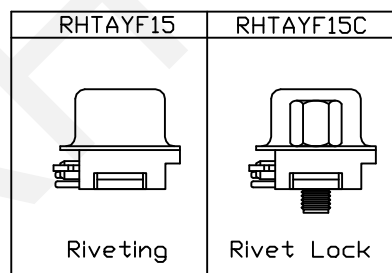

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass, Gold Plating

Shell: Steel, Nickel Plating,

Electrical Characteristics:

Current Rating: 3 AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 25MΩ Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

RHTAYF15-09-F-X

Slim D-SUB Connector,

2 Row R/A Through Hole

Number of Contacts: 09-9Pin

Connector type: F-Female

Housing Color: B-Black

L-Blue E-Green



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

Slim D-SUB Connector, R/A,
Through Hole, 2.50mm, Female

THIRD ANGLE PROJECTION



RHTAYF15-09-F-X