


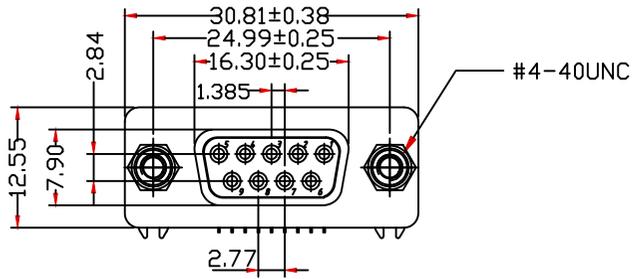


RoHS Compliant

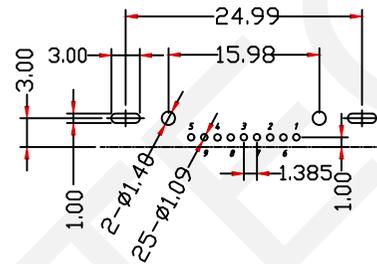

Material:  
 Housing:PBT+30% Glass Filled,UL94V-0  
 Contacts:Brass,Gold Plating  
 Shell:Steel,Nickel Plating,



Electrical Characteristics:  
 Current Rating:3 AMP  
 Insulator Resistance1000MΩ Min. at DC 500V  
 Withstanding Voltage: 500V AC (rms) For 1 Minute  
 Contact Resistance:25MΩ Max. Initial  
 Operating Temperature:-55°C~+105°C

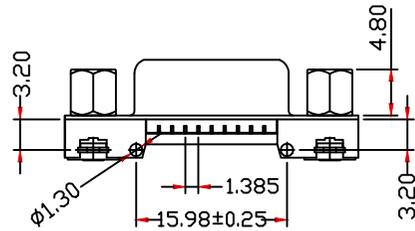

RECOMMENDED PCB LAYOUT  
 TOLERANCE:±0.05mm

Order Information:  
RHTAYF18C-09-F-B

Type:F18 Or F18C  
 Number of Contacts  
 Connector type: F-Female  
 Housing Color:B-Black L-Blue

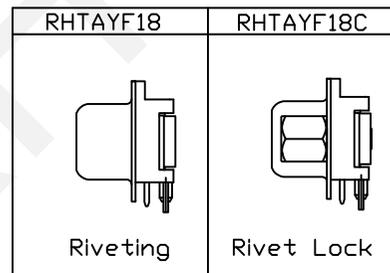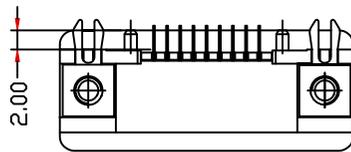


NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN


Slim D-SUB Connector,R/A,  
 Through Hole,9P Female  
 THIRD ANGLE PROJECTION  
  
 RHTAYF18X-09-F-B

RoHS Compliant

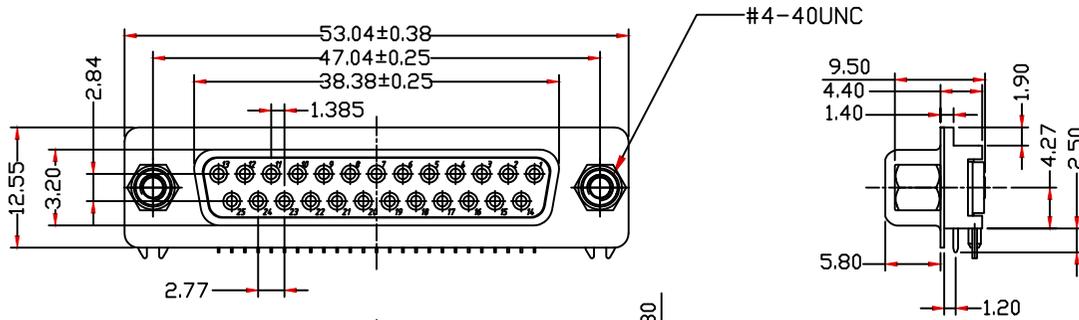

Material:  
 Housing:PBT+30% Glass Filled,UL94V-0  
 Contacts:Brass,Gold Plating  
 Shell:Steel,Nickel Plating,




Electrical Characteristics:  
 Current Rating:3 AMP  
 Insulator Resistance:1000MΩ Min. at DC 500V  
 Withstanding Voltage: 500V AC (rms) For 1 Minute  
 Contact Resistance:25MΩ Max. Initial  
 Operating Temperature:-55°C~+105°C

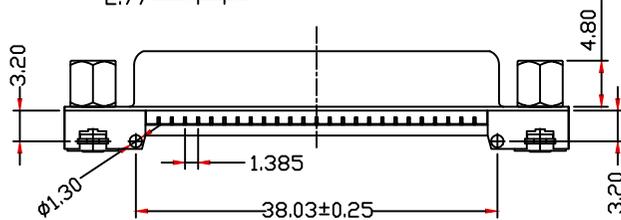

Order Information:

RHTAYF18C-25-F-B

Type:F18 Or F18C  
 Number of Contacts  
 Connector type: F-Female  
 Housing Color:B-Black L-Blue

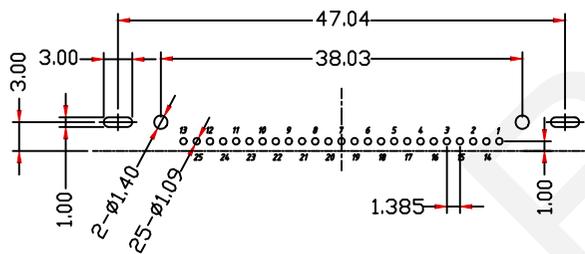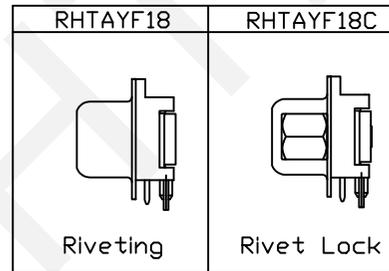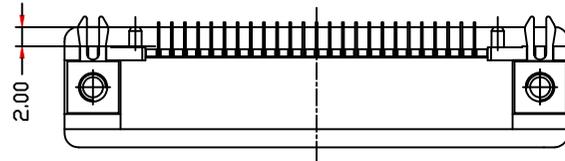

RECOMMENDED PCB LAYOUT  
 TOLERANCE:±0.05mm

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG  
 APPR BY ZHAN

Slim D-SUB Connector,R/A,  
 Through Hole,25P Female  
 THIRD ANGLE PROJECTION  
  
 RHTAYF18X-25-F-B