
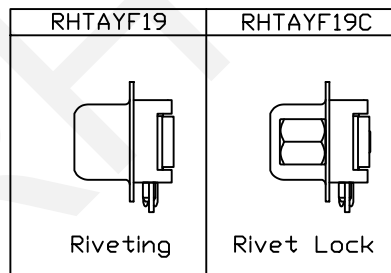
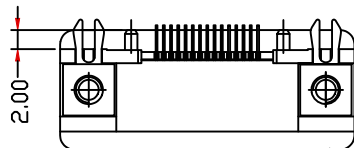
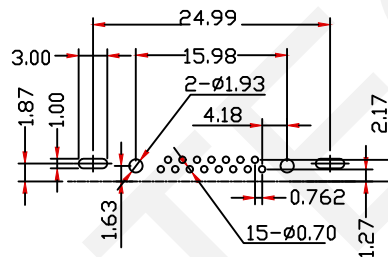
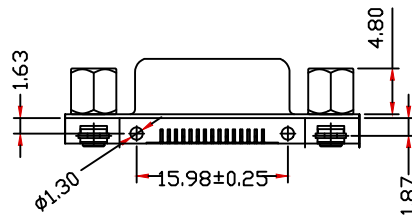



RoHS Compliant

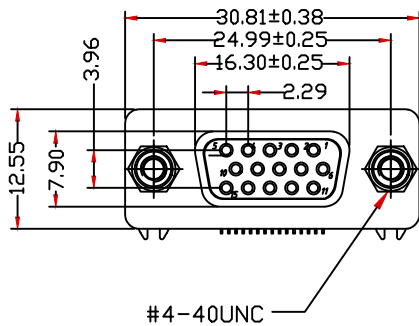

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass, Gold Plating

Shell: Steel, Nickel Plating,

Electrical Characteristics:

Current Rating: 3 AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 25MΩ Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

RHTAYF19C-15-F-B

Type: F19 Or F19C

15-No. of 15 Pins

Connector type: F-Female

Housing Color: B-Black L-Blue



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Slim D-SUB Connector, R/A,
Through Hole, 15P Female

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYF19C-15-F-B

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN