

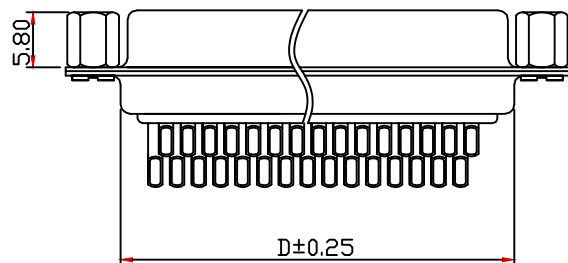


RoHS Compliant

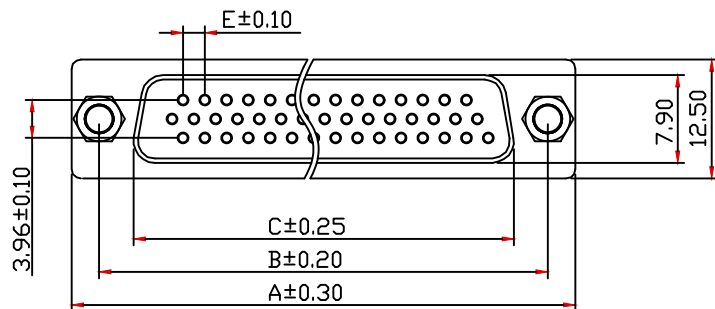

Number of Contacts	DIMENSION				
	A ± 0.30	B ± 0.20	C ± 0.25	D ± 0.25	E ± 0.10
15	30.80	25.00	16.30	19.30	2.29
26	39.20	33.30	24.60	27.60	2.29
44	53.10	47.04	38.30	41.10	2.29
62	69.34	63.50	54.80	57.30	2.41

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass,

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell: Steel,

Front Shell Nickel Plating,

Back Shell Tin Plating

Electrical Characteristics:

Current Rating: 5AMP

Insulator Resistance: 1000M Ω Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20M Ω Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

RHTAY14A-XX-F-L

D-SUB Connector,

Type: 14A

XX-No. of 15, 26, 44, 62 Pins

Connector Type:

M-Male F-Female,


Housing Color:

L-Blue B-Black W-White

UNITS: mm	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120
± 0.12	± 0.15	± 0.3	± 0.5
CHK'D BY FENG			
APPR BY ZHAN			

D-SUB Connector, Solder
Type, Female, Riveting Before

THIRD ANGLE PROJECTION






RHTAY14A-XX-F-L



NINGBO RHT ELECTRONIC CO., LTD

RoHS Compliant

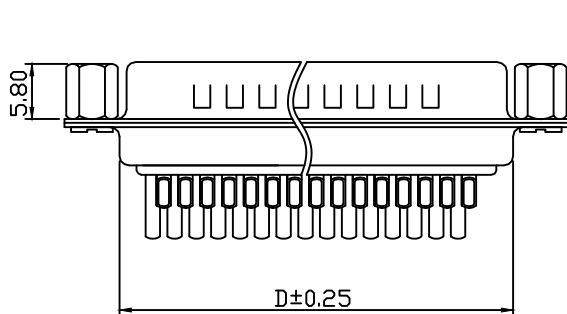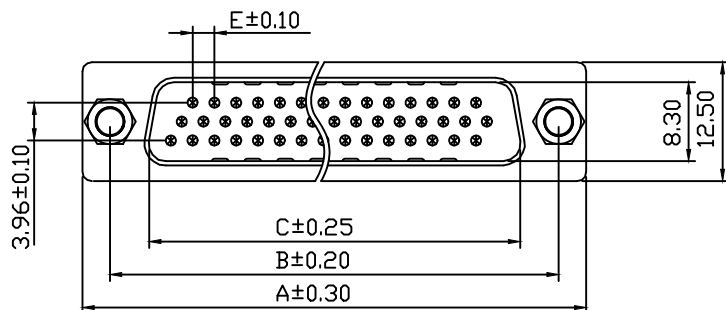

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass,

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell: Steel,

Front Shell Nickel Plating,

Back Shell Tin Plating

Electrical Characteristics:

Current Rating: 5AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20MΩ Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

RHTAY14A-XX-M-L

D-SUB Connector,

Type: 14A

XX-No. of 15, 26, 44, 62 Pins

Connector Type:

M-Male F-Female,

Housing Color:

L-Blue B-Black W-White

Number of Contacts	DIMENSION				
	A±0.30	B±0.20	C±0.25	D±0.25	E±0.10
15	30.80	25.00	16.90	19.30	2.29
26	39.20	33.30	25.25	27.60	2.29
44	53.10	47.04	38.96	41.10	2.29
62	69.34	63.50	55.40	57.30	2.41



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN




D-SUB Connector, Solder
Type, Female, Riveting Before

THIRD ANGLE PROJECTION



RHTAY14A-XX-M-L

RoHS Compliant

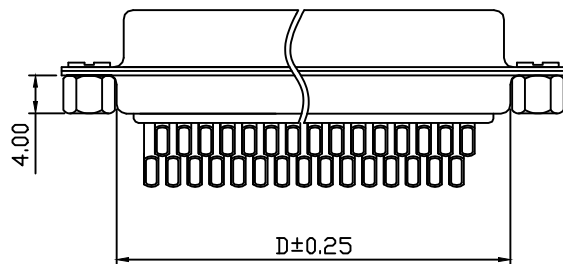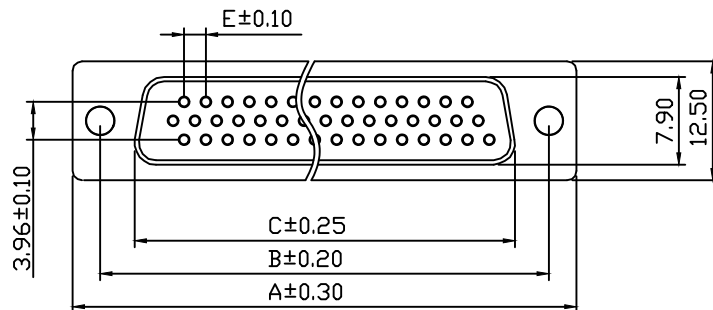

Number of Contacts	DIMENSION				
	A ± 0.30	B ± 0.20	C ± 0.25	D ± 0.25	E ± 0.10
15	30.80	25.00	16.30	19.30	2.29
26	39.20	33.30	24.60	27.60	2.29
44	53.10	47.04	38.30	41.10	2.29
62	69.34	63.50	54.80	57.30	2.41

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass,

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell: Steel,

Front Shell Nickel Plating,

Back Shell Tin Plating

Electrical Characteristics:

Current Rating: 5AMP

Insulator Resistance: 1000M Ω Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20M Ω Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

RHTAY14D-XX-F-L

D-SUB Connector,

Type: 14D

XX-No. of 15, 26, 44, 62 Pins

Connector Type:

M-Male F-Female,

Housing Color:

L-Blue B-Black W-White

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

D-SUB Connector, Solder
Type, Female, Riveting Before

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAY14D-XX-F-L

± 0.12

± 0.15

± 0.3




± 0.5

APPR BY ZHAN



NINGBO RHT ELECTRONIC CO., LTD

RoHS Compliant

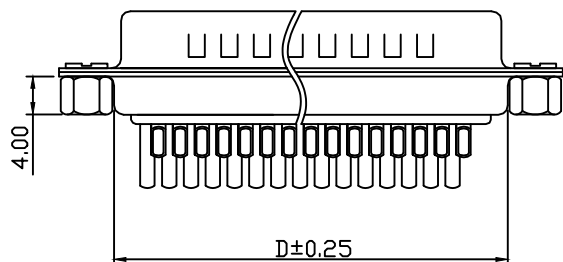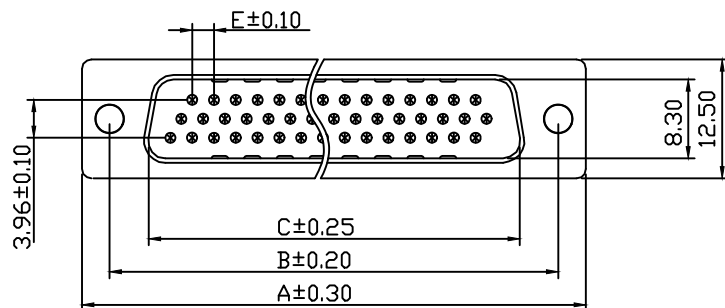

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass,

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell: Steel,

Front Shell Nickel Plating,

Back Shell Tin Plating

Electrical Characteristics:

Current Rating: 5AMP

Insulator Resistance: 1000M Ω Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20M Ω Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

RHTAY14D-XX-M-L

D-SUB Connector,

Type: 14D

XX-No. of 15, 26, 44, 62 Pins

Connector Type:

M-Male F-Female,

Housing Color:

L-Blue B-Black W-White

Number of Contacts	DIMENSION				
	A ± 0.30	B ± 0.20	C ± 0.25	D ± 0.25	E ± 0.10
15	30.80	25.00	16.90	19.30	2.29
26	39.20	33.30	25.25	27.60	2.29
44	53.10	47.04	38.96	41.10	2.29
62	69.34	63.50	55.40	57.30	2.41

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

D-SUB Connector, Solder
Type, Female, Riveting Before

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAY14D-XX-M-L

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



NINGBO RHT ELECTRONIC CO., LTD