

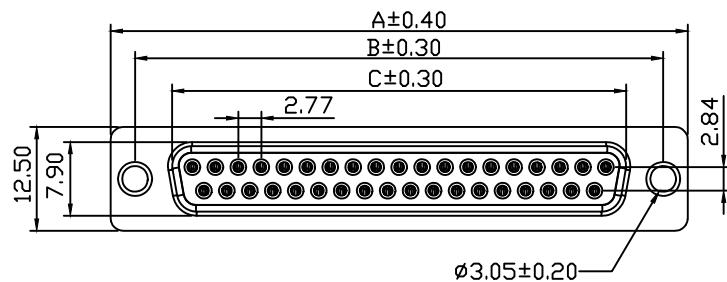




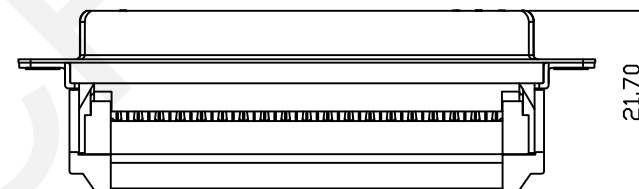


RoHS Compliant



Number of Contacts	DIMENSION		
	A±0.40	B±0.30	C±0.30
09	30.90	24.99	16.30
15	39.20	33.05	24.60
25	53.10	47.04	38.30
37	69.40	63.50	54.80

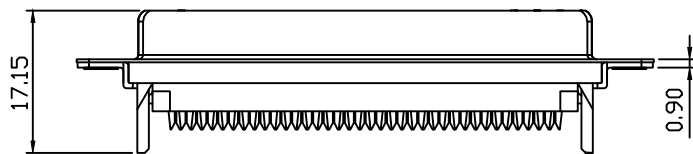

Material:
Housing:PBT+30% Glass Filled,UL94V-0
Contacts:Brass,Gold Plating
Shell:Steel,Nickel Plating,
Electrical Characteristics:
Current Rating:1 AMP
Insulator Resistance:1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) For 1 Minute
Contact Resistance:20MΩ Max. Initial
Operating Temperature:-40°C~+105°C

Order Information:

RHTAY23-XX-F-L

D-SUB Connector,

IDC Type

XX-No.of 09,15,25,37,Pins

Connector Type:

M-Male F-Female,

Housing Color:

B-Black L-Blue

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

D-SUB Connector,IDC Type,Female

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAY23-XX-F-L

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

1

2

3

4

5


6

7








8

9

RoHS Compliant

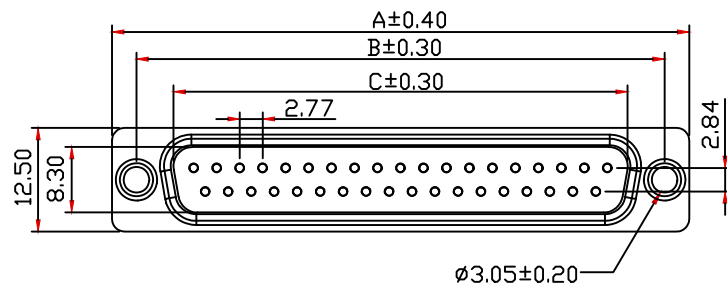

Number of Contacts	DIMENSION		
	A±0.40	B±0.30	C±0.30
09	30.90	24.99	16.90
15	39.20	33.05	25.25
25	53.10	47.04	38.96
37	69.40	63.50	55.42

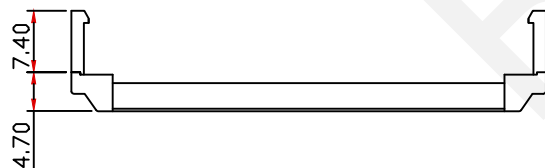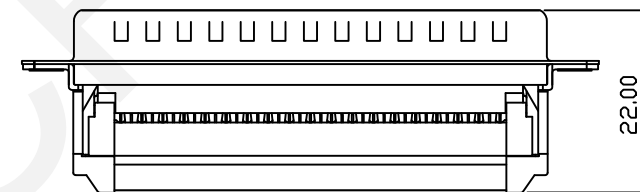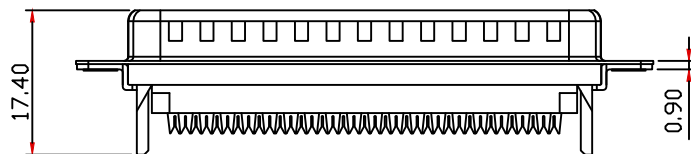

Material:
Housing:PBT+30% Glass Filled,UL94V-0
Contacts:Brass,Gold Plating
Shell:Steel,Nickel Plating,
Electrical Characteristics:
Current Rating:1 AMP
Insulator Resistance:1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) For 1 Minute
Contact Resistance:20MΩ Max. Initial
Operating Temperature:-40°C~+105°C

Order Information:

RHTAY23-XX-M-L

D-SUB Connector,

IDC Type

XX-No.of 09,15,25,37,Pins

Connector Type:

M-Male F-Female,

Housing Color:

B-Black L-Blue

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

D-SUB Connector,IDC Type,Male

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY23-XX-M-L

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9