
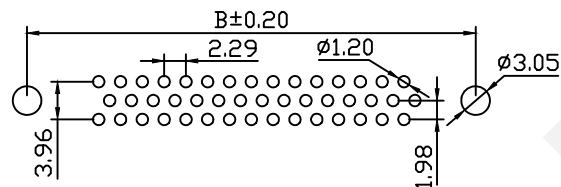
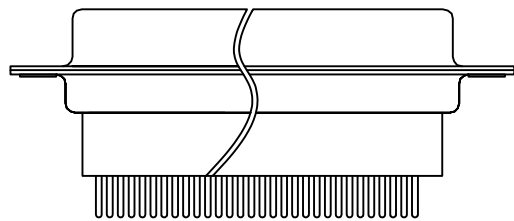



RoHS Compliant

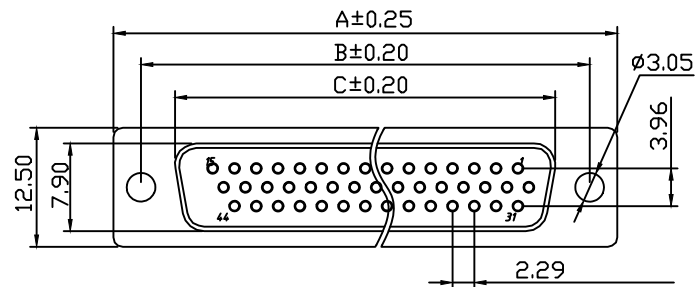

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05mm

Number of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
15	30.80	24.99	16.30
26	39.20	33.30	24.60
44	53.10	47.04	38.30
62	69.34	63.50	54.80

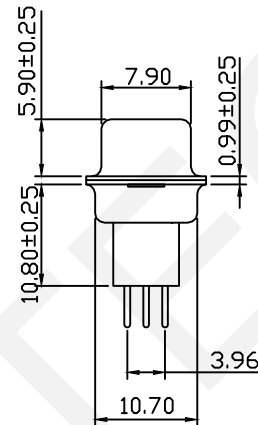

Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass,Gold Plating Or

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell:Steel,Nickel Plating,

Electrical Characteristics:

Current Rating:5 AMP

Insulator Resistance:1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-40°C~+105°C

Order Information:

RHTAY72-XX-F-B

D-SUB Connector, —

3 Row Through Hole,type:72

XX-No.of 15,26,44,62Pins —

Connector Type: —

M-Male F-Female,

Housing Color: —

B-Black L-Blue W-White

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

D-SUB Connector,High Profile,
Through Hole, Female

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3




±0.5

APPR BY ZHAN




RHTAY72-XX-F-B

RoHS Compliant

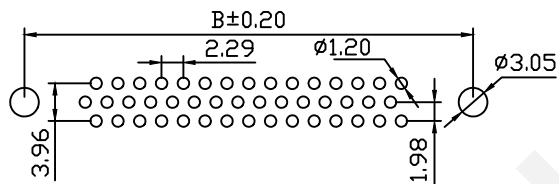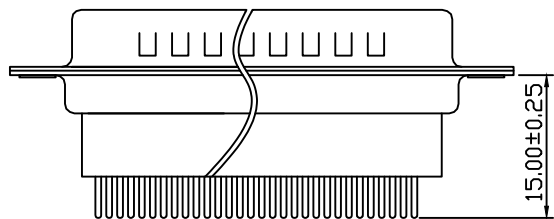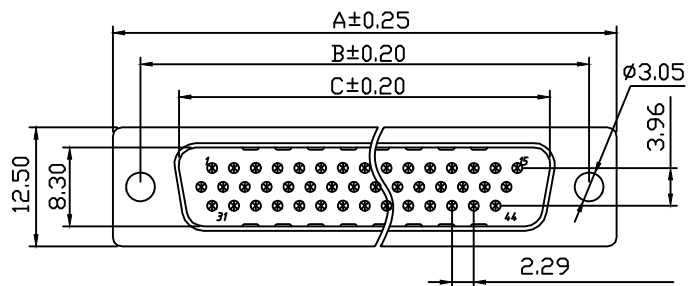

RECOMMENDED PCB LAYOUT
TOLERANCE: $\pm$ 0.05mm

Number of Contacts	DIMENSION		
	A $\pm$ 0.25	B $\pm$ 0.20	C $\pm$ 0.20
15	30.80	24.99	16.90
26	39.20	33.30	25.25
44	53.10	47.04	38.96
62	69.34	63.50	55.42

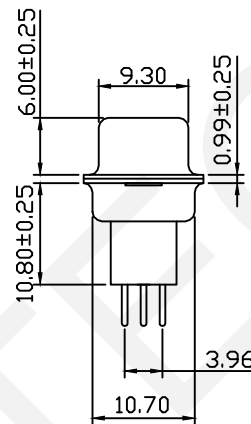

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass, Gold Plating Or

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell: Steel, Nickel Plating,

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance: 1000M Ω Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20M Ω Max. Initial

Operating Temperature: -40 $^{\circ}$ C ~ +105 $^{\circ}$ C

Order Information:

RHTAY72-XX-M-B

D-SUB Connector, _____

3 Row Through Hole, type: 72

XX-No. of 15, 26, 44, 62 Pins _____

Connector Type: _____

M-Male F-Female, _____

Housing Color: _____

B-Black L-Blue W-White



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

$\pm$ 0.12

$\pm$ 0.15


$\pm$ 0.3

$\pm$ 0.5

APPR BY ZHAN




D-SUB Connector, High Profile,
Through Hole, Male

THIRD ANGLE PROJECTION




RHTAY72-XX-M-B

RoHS Compliant

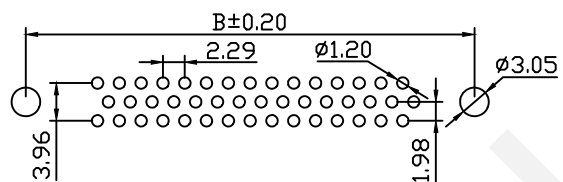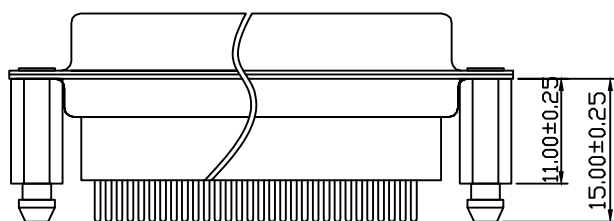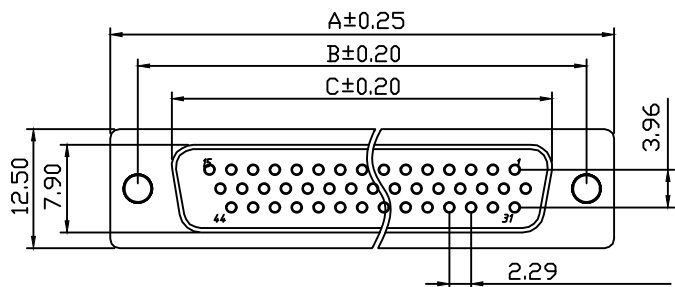

RECOMMENDED PCB LAYOUT
TOLERANCE: $\pm$ 0.05mm

Number of Contacts	DIMENSION		
	A $\pm$ 0.25	B $\pm$ 0.20	C $\pm$ 0.20
15	30.80	24.99	16.30
26	39.20	33.30	24.60
44	53.10	47.04	38.30
62	69.34	63.50	54.80

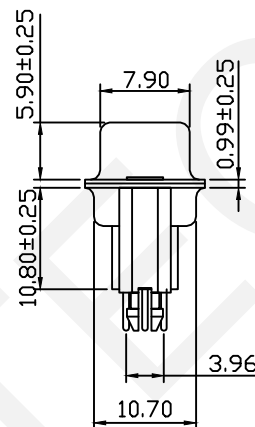

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass, Gold Plating Or

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell: Steel, Nickel Plating,

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance: 1000M Ω Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20M Ω Max. Initial

Operating Temperature: -40 $^{\circ}$ C ~ +105 $^{\circ}$ C

Order Information:

RHTAY72B-XX-F-B

D-SUB Connector, —

3 Row Through Hole, Riveting

Later Harpoons, Type: 72B

XX-No. of 15, 26, 44, 62 Pins —

Connector Type: —

M-Male F-Female,

Housing Color: —

B-Black L-Blue W-White

RHTECP[®] NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

D-SUB Connector, High Profile, Through
Hole, Female, Riveting Later Harpoons

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


$\pm$ 0.12

$\pm$ 0.15

$\pm$ 0.3




$\pm$ 0.5

APPR BY ZHAN




RHTAY72B-XX-F-B

RoHS Compliant

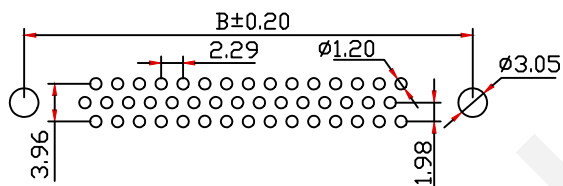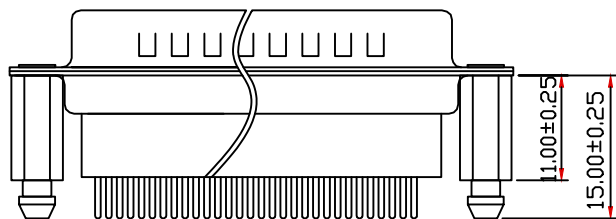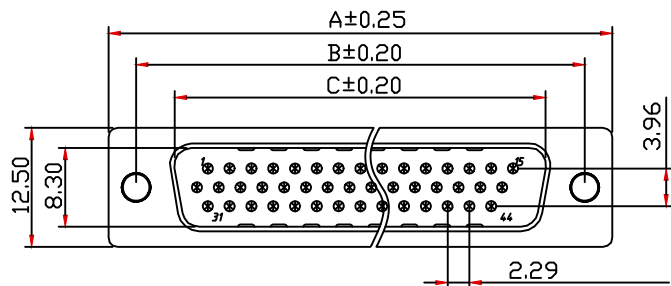

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

Number Of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
15	30.80	24.99	16.90
26	39.20	33.30	25.25
44	53.10	47.04	38.96
62	69.34	63.50	55.42

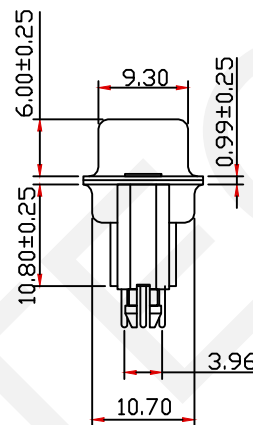

Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass,Gold Plating Or

Gold Plating On Contact Arer,

Tin On Solder Tail.

Shell:Steel,Nickel Plating,

Electrical Characteristics:

Current Rating:5 AMP

Insulator Resistance:1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-40°C~+105°C

Order Information:

RHTAY72B-XX-M-B

D-SUB Connector, —

3 Row Through Hole,Riveting

Later Harpoons,Type:72B

XX-No.of 15,26,44,62Pins —

Connector Type: —

M-Male F-Female,

Housing Color: —

B-Black L-Blue W-White

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

D-SUB Connector,High Profile,Through
Hole,Male,Riveting Later Harpoons

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3




±0.5

APPR BY ZHAN




RHTAY72B-XX-M-B

RoHS Compliant

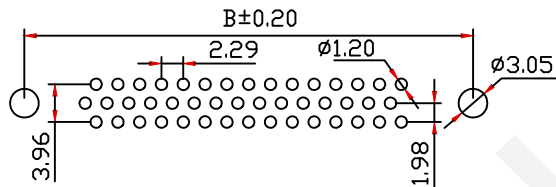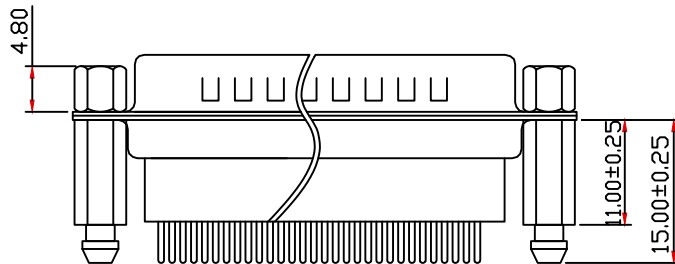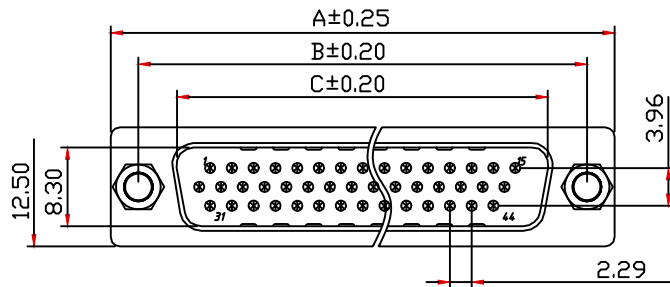

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

Number Of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
15	30.80	24.99	16.90
26	39.20	33.30	25.25
44	53.10	47.04	38.96
62	69.34	63.50	55.42

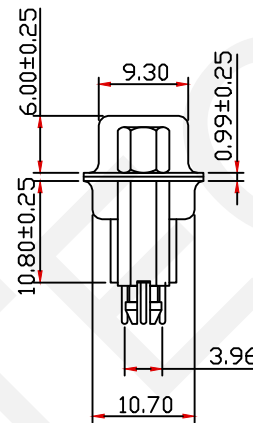

Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass,Gold Plating Or

Gold Plating On Contact Arer,

Tin On Solder Tail.

Shell:Steel,Nickel Plating,

Electrical Characteristics:

Current Rating:5 AMP

Insulator Resistance:1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-40°C~+105°C

Order Information:

RHTAY72C-XX-M-B

D-SUB Connector,

3 Row Through Hole,After

Lock Screw Rivet Harpoons,

Type:72C

XX-No.of 15,26,44,62Pins

Connector Type:

M-Male F-Female,

Housing Color:

B-Black L-Blue W-White

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

D-SUB Connector,High Profile,Through Hole,
Male,After Lock Screw Rivet Harpoons

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY72C-XX-M-B