
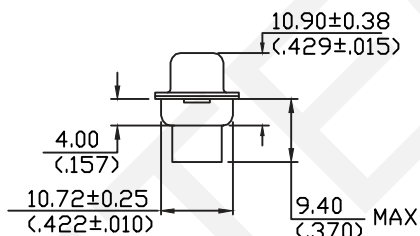
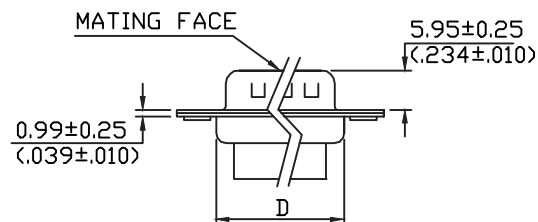
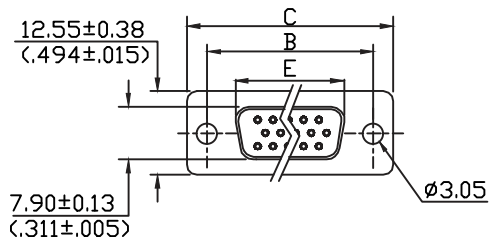


RoHS Compliant

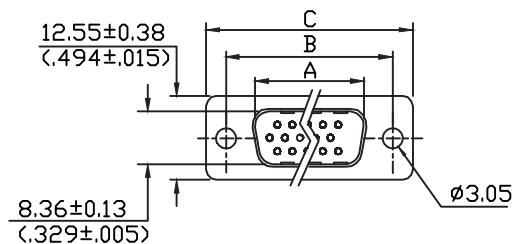

Number of Contacts	A ±0.25 ±0.01	B ±0.13 ±0.005	C ±0.38 ±0.015	D ±0.25 ±0.01	E ±0.25 ±0.01
15	16.92 0.666	24.99 0.984	30.81 1.213	19.28 0.759	16.33 0.643
26	25.25 0.994	33.32 1.312	39.14 1.541	27.51 1.083	24.66 0.971
44	38.96 1.534	47.04 1.852	53.04 2.088	41.28 1.625	38.38 1.511
62	55.42 2.182	63.50 2.500	69.32 2.729	57.71 2.272	54.84 2.159

Electrical Specification:

Current Rating: 2 AMP

Insulator Resistance: 1000M ohms min. at DC 500V

Contact Resistance: 20m ohms max. at DC 100mA

Operating Temperature: -20°C~+85°C

Application wire AWG : 20-24 AWG

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Phosphor Bronze

Shell: Steel, 100u" Tin Over 50u" min Nickel

Cinch Nut: Brass, 100u" min Nickel Plated

Screwlock: Brass, 100u" min Nickel Plated

ORDER INFORMATION

Product NO: RHTAY76B-XX-F-L

Contact Number of Row

76B=D-SUB Row Series 3

Number of Contacts

M=Male F=Female

L=Blue B=Black

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

3 ROW TYPE

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY76B-XX-F-L