RoHS Compliant

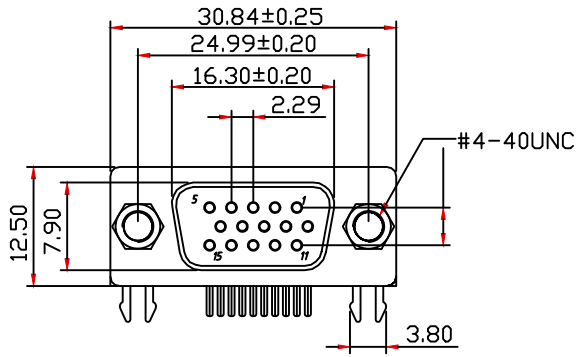

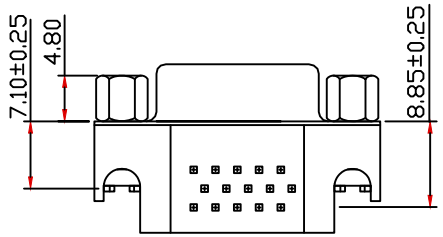

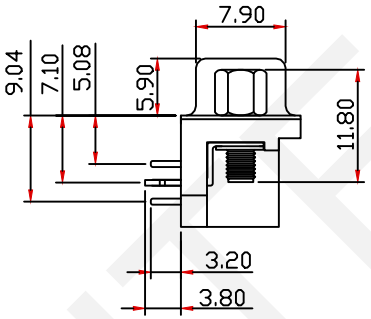

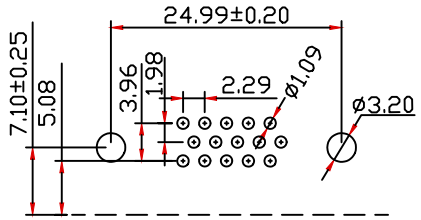

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05mm

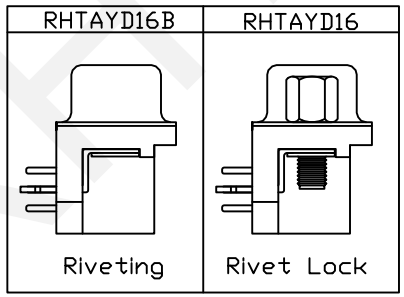

Material:
Housing:PBT+30% Glass Filled,UL94V-0
Contacts:Brass,Gold Plating
Shell:Steel,Nickel Plating,

Electrical Characteristics:
Current Rating:5 AMP
Insulator Resistance1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) For 1 Minute
Contact Resistance:20MΩ Max. Initial
Operating Temperature:-55°C~+105°C

Order Information:
RHTAYD16-15-F-L

Type:D16 Or D16B
15-No.of 15Pins
Connector type: F-Female
Housing Color:B-Black L-Blue

RHTECP NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	D-SUB Connector,R/A, Through Hole,5.08mm,Female
	0~3	3~18	18~50	50~120	CHK'D BY FENG
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN
					THIRD ANGLE PROJECTION / RHTAYD16-15-F-L

RHTECP