
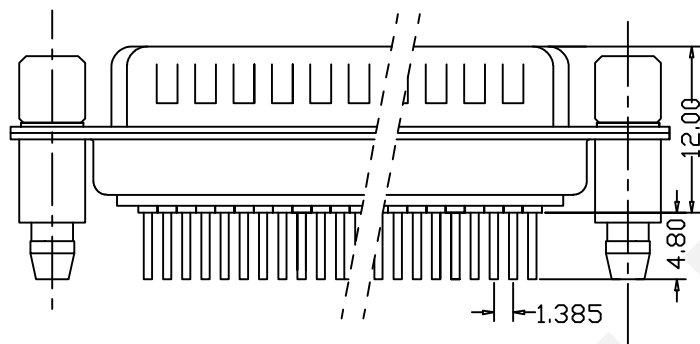
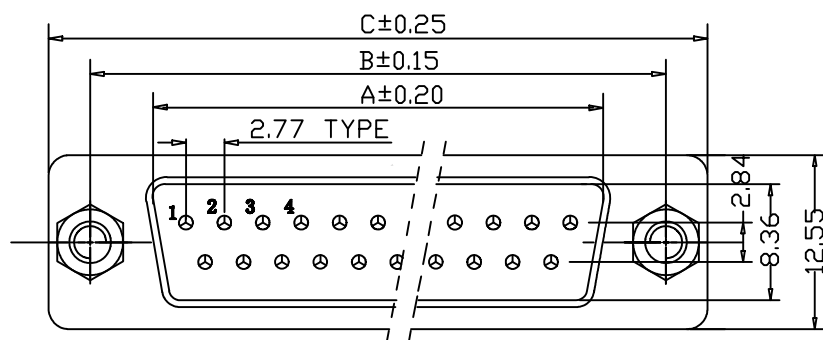


P.C.B LAYOUT

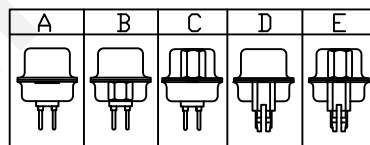

#### Material:

Housing: Temperature Thermoplastics,PBT+G.F UL94V-0

Contact:Brass or Bronze

Shell:0.35T Steel Nickel Plating All Area

#### Electical Characteristics:

Current Rating:5A

Contact Resistance:20milliohms Max

Withstanding Voltage:500V AC For 1 Minute

Insulation Resistance:1000Megohms Min

Operating Temperature:-55°Cto +105°C

|   | 09pin | 15pin | 25pin | 37pin |
|---|-------|-------|-------|-------|
| A | 16.92 | 25.25 | 38.96 | 55.42 |
| B | 24.99 | 32.32 | 47.04 | 63.50 |
| C | 30.80 | 39.10 | 53.00 | 69.30 |

| UNITS:mm | SHEET SIZE: A4 |       | SCALE:--- |
|----------|----------------|-------|-----------|
| 0~3      | 3~18           | 18~50 | 50~120    |
| ±0.12    | ±0.15          | ±0.3  | ±0.5      |


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

D SUB STRAIGHT DUAL ROW MALE NO ACCESSORIES  
WHITE INSULATOR GOLD FLASH STAMPED PIN

THIRD ANGLE PROJECTION



RHTAY21E-15-M-W



NINGBO RHT ELECTRONIC CO.,LTD