

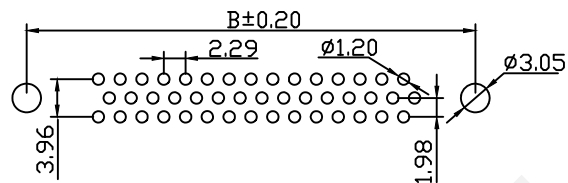
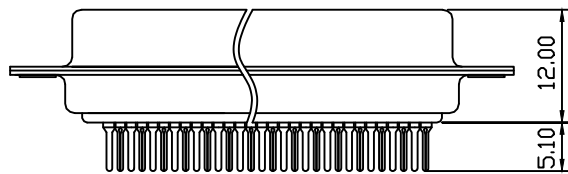


RoHS Compliant

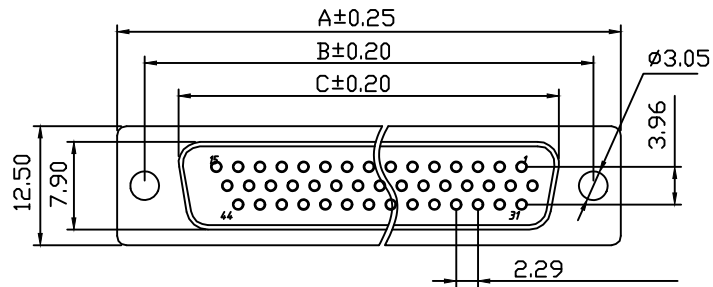

RECOMMENDED PCB LAYOUT
TOLERANCE: $\pm$ 0.05mm

Number Of Contacts	DIMENSION		
	A $\pm$ 0.25	B $\pm$ 0.20	C $\pm$ 0.20
15	30.80	24.99	16.33
26	39.20	33.30	24.60
44	53.10	47.04	38.30
62	69.34	63.50	54.80



Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass, Gold Plating Or

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell: Steel, Nickel Plating,

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance: 1000M Ω Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20M Ω Max. Initial

Operating Temperature: -40°C~+105°C

Order Information:

RHTAYC21-XX-F-L

D-SUB Connector, _____

3 Row Through Hole

XX-No. of 15, 26, 44, 62 Pins _____

Connector Type: F-Female, _____

Housing Color: _____

B-Black L-Blue W-White

Call Waiting Force

Contacts	Insertion	Withdraw
15M/15F	$\leq$ 4.0kgf	$\geq$ 2.0kgf
26M/26F	$\leq$ 5.8kgf	$\geq$ 2.5kgf
44M/44F	$\leq$ 6.5kgf	$\geq$ 3.5kgf
62M/62F	$\leq$ 8.5kgf	$\geq$ 4.5kgf

RHTECP® NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

D-SUB Connector, Panel Mount,
Through Hole, Female,

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYC21-XX-F-L

$\pm$ 0.12




$\pm$ 0.15

$\pm$ 0.3

$\pm$ 0.5


APPR BY ZHAN

RoHS Compliant

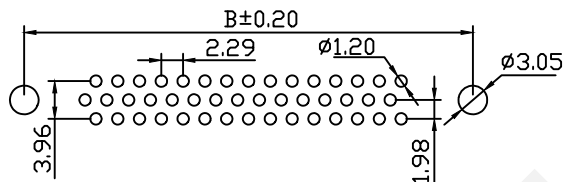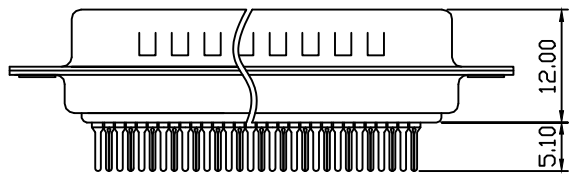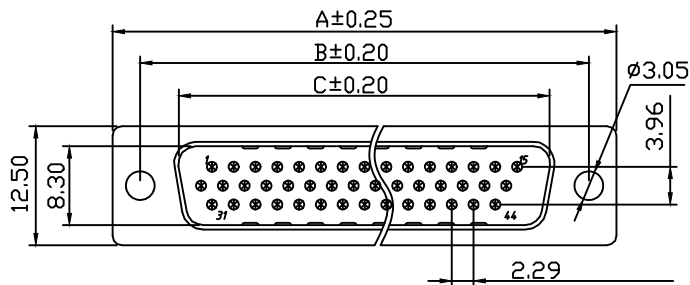

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

Number Of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
15	30.80	24.99	16.90
26	39.20	33.30	25.25
44	53.10	47.04	38.96
62	69.34	63.50	55.42



Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass,Gold Plating Or

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell:Steel,Nickel Plating,

Electrical Characteristics:

Current Rating:5 AMP

Insulator Resistance:1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-40°C~+105°C

Order Information:

RHTAYC21-XX-M-L

D-SUB Connector, —

3 Row Through Hole

XX-No.of 15,26,44,62Pins —

Connector Type: M-Male, —

Housing Color: —

B-Black L-Blue W-White

Call Waiting Force

Contacts	Insertion	Withdraw
15M/15F	≤4.0kgf	≥2.0kgf
26M/26F	≤5.8kgf	≥2.5kgf
44M/44F	≤6.5kgf	≥3.5kgf
62M/62F	≤8.5kgf	≥4.5kgf

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

D-SUB Connector,Panel Mount,
Through Hole,Male,

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYC21-XX-M-L