
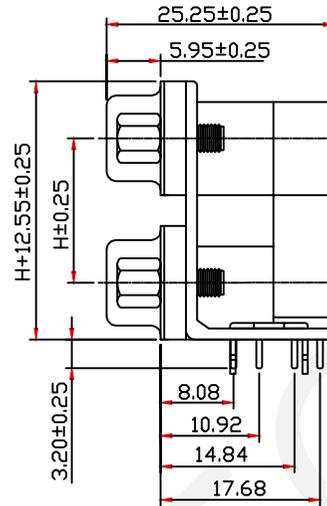


RoHS Compliant

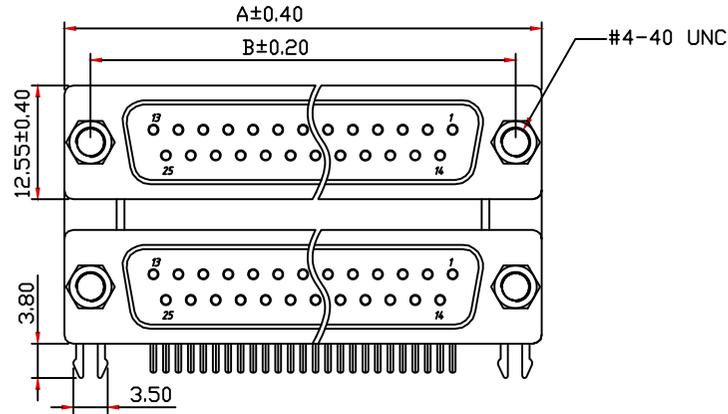


Material:
 Housing: PBT+30% Glass Filled, UL94V-0
 Contacts: Brass, Gold Plating
 Shell: Steel, Nickel Plating
 Electrical Characteristics
 Current Rating: 1AMP
 Insulator Resistance: 1000MΩ Min. at DC 500V
 Withstanding Voltage: 500V AC(rms) for 1 Minute
 Contact Resistance: 20mΩ Max. Initial
 Operating Temperature: -55°C~+105°C

Order Information


RHTAY15-XX F F-X X B

D-SUB Connector,
 Stacked type
 Number of Contacts
 UP Connector: F-Female
 Down Connector: F-Female
 Contact Body type:
 A: H=15.88mm B: H=19.02mm
 PROCESS OPTION
 A: Rivet Only B: Rivet Lock
 Housing Color: B-Black

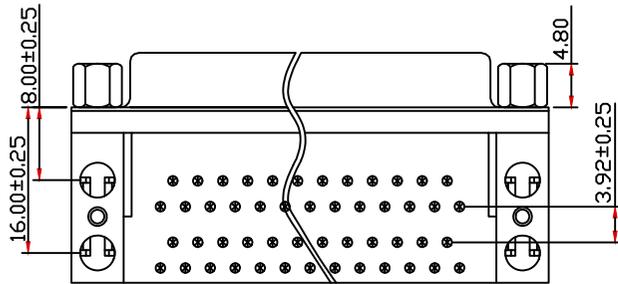


Number Of Contacts	DIMENSION	
	A±0.25	B±0.20
09	30.80	24.99
15	39.20	33.30
25	53.10	47.04
37	69.34	63.50

Contact Body Type	
Code	H±0.25
A	15.88
B	19.02

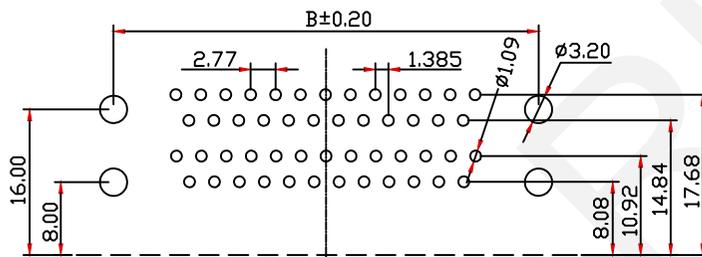

RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05mm



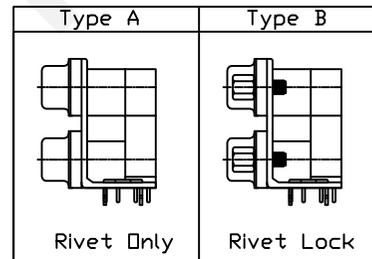


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

D-SUB Connector,
 Female+Female Stacked type
 THIRD ANGLE PROJECTION
 RHTAY15-XXFF-XXB

RoHS Compliant

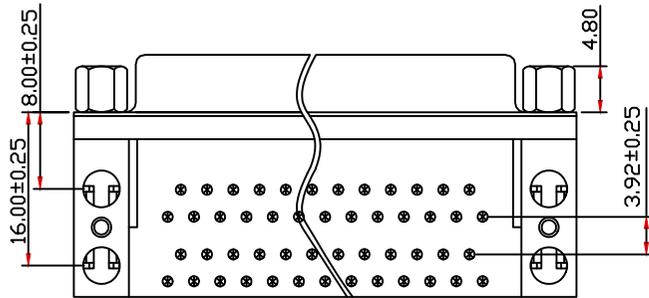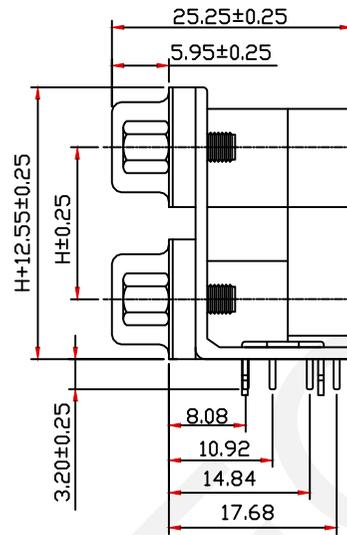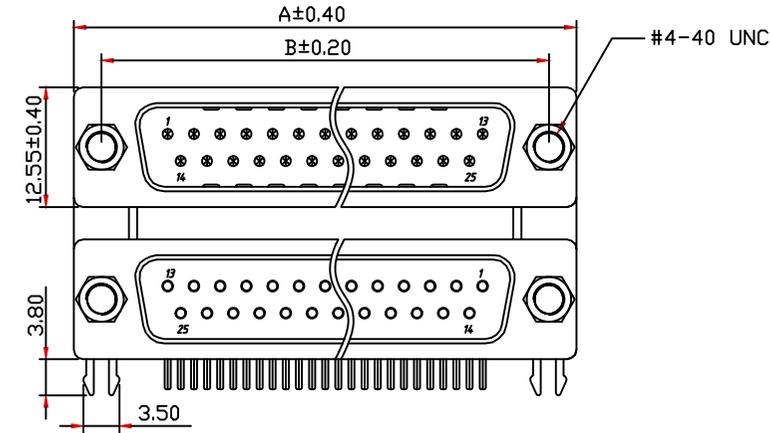

Number of Contacts	DIMENSION	
	A±0.25	B±0.20
09	30.80	24.99
15	39.20	33.30
25	53.10	47.04
37	69.34	63.50


Contact Body Type	
Code	H±0.25
A	15.88
B	19.02

Material:
 Housing: PBT+30% Glass Filled, UL94V-0
 Contacts: Brass, Gold Plating
 Shell: Steel, Nickel Plating
 Electrical Characteristics
 Current Rating: 1AMP
 Insulator Resistance: 1000MΩ Min. at DC 500V
 Withstanding Voltage: 500V AC(rms) for 1 Minute
 Contact Resistance: 20mΩ Max. Initial
 Operating Temperature: -55°C~+105°C


Order Information

RHTAY15-XX M F-X X B

D-SUB Connector,
 Stacked type
 Number of Contacts
 UP Connector: M-Male
 Down Connector: F-Female
 Contact Body type:
 A: H=15.88mm B: H=19.02mm
 PROCESS OPTION
 A: Rivet Only B: Rivet Lock
 Housing Color: B-Black

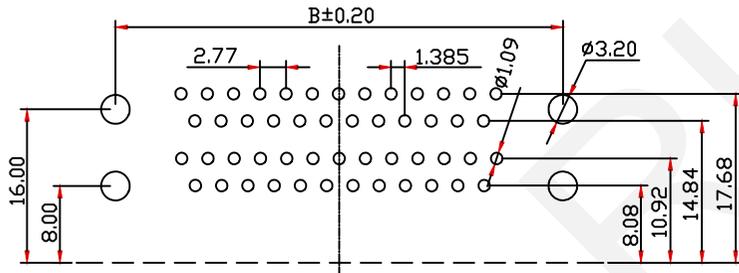

RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05mm

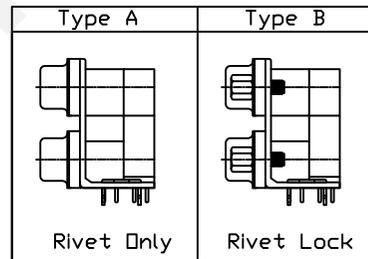

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN



D-SUB Connector,
 Male+Female Stacked type

THIRD ANGLE PROJECTION




RHTAY15-XXMF-XXB

RoHS Compliant

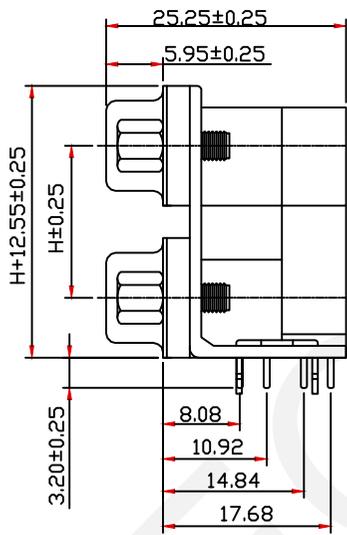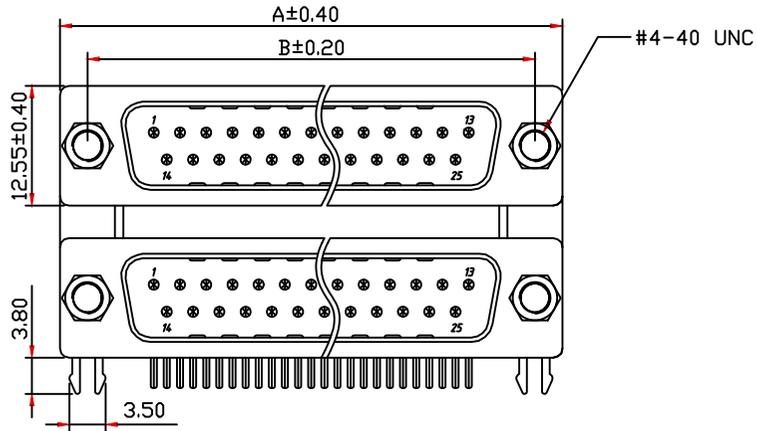

Material:
 Housing: PBT+30% Glass Filled, UL94V-0
 Contacts: Brass, Gold Plating
 Shell: Steel, Nickel Plating
 Electrical Characteristics
 Current Rating: 1AMP
 Insulator Resistance: 1000MΩ Min. at DC 500V
 Withstanding Voltage: 500V AC(rms) for 1 Minute
 Contact Resistance: 20mΩ Max. Initial
 Operating Temperature: -55°C ~ +105°C


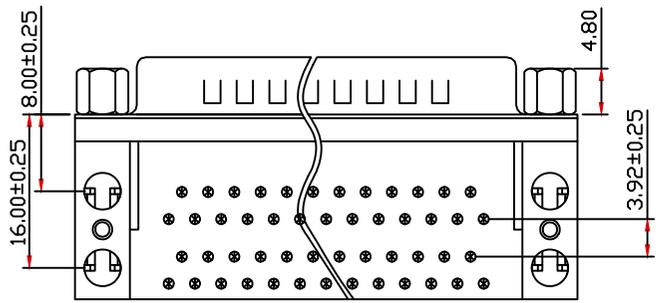


Number Of Contacts	DIMENSION	
	A±0.25	B±0.20
09	30.80	24.99
15	39.20	33.30
25	53.10	47.04
37	69.34	63.50

Contact Body Type	
Code	H±0.25
A	15.88
B	19.02

Order Information
 RHTAY15-XX M M-X X B

D-SUB Connector,
 Stacked type
 Number of Contacts
 UP Connector: M-Male
 Down Connector: M-Male
 Contact Body type:
 A: H=15.88mm B: H=19.02mm
 PROCESS OPTION
 A: Rivet Only B: Rivet Lock
 Housing Color: B-Black

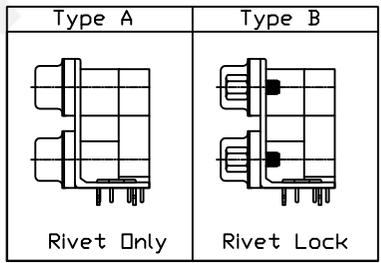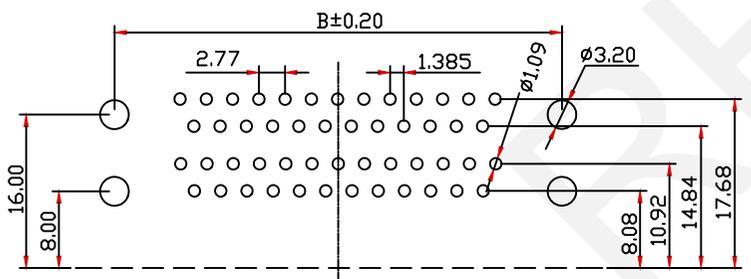


RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05mm

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

D-SUB Connector,
 Male+Male Stacked type
 THIRD ANGLE PROJECTION

 RHTAY15-XXMM-XXB