
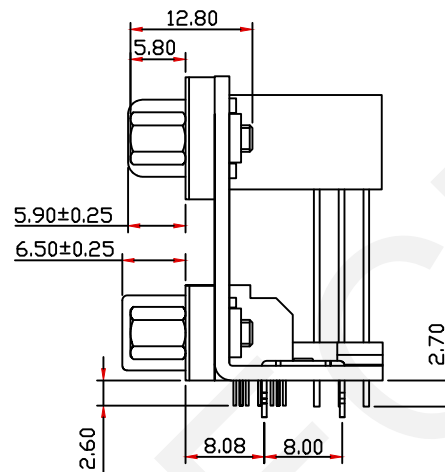


RoHS Compliant

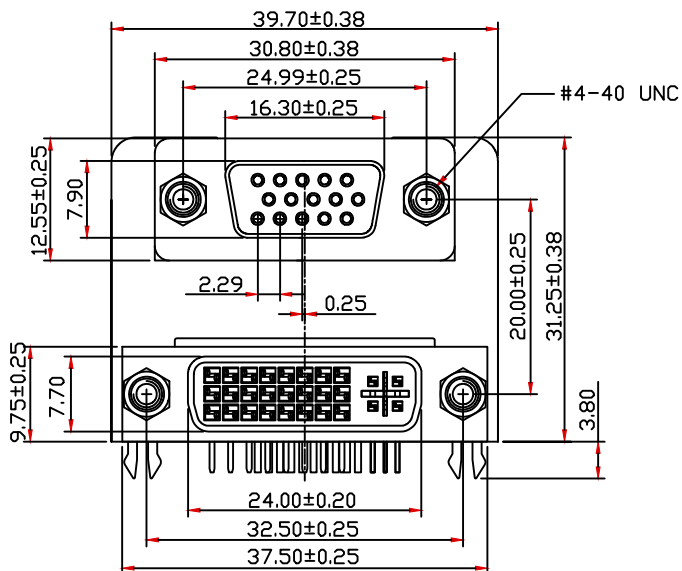

Material:

Housing:

VGA:PBT+30% Glass filled,UL94-V0,BLUE

DVI:PA66,WHITE

Contacts: Brass ,Gold Plating

Shell: Steel, Nickel Plating

Electrical Characteristics

Current Rating:3 AMP

Insulator Resistance:1000MΩ Min. at DC 500V

Withstanding Voltage:500V AC(rms)for 1 Minute

Contact Resistance:20mΩ Max.Initial

Operating Temperature:-55°C~+105°C

Order Information



RHTAY19-0001

D-SUB Connector,

Stacked type

Number of Contacts

0001:VGA 15P Female+DVI 24+5P Female

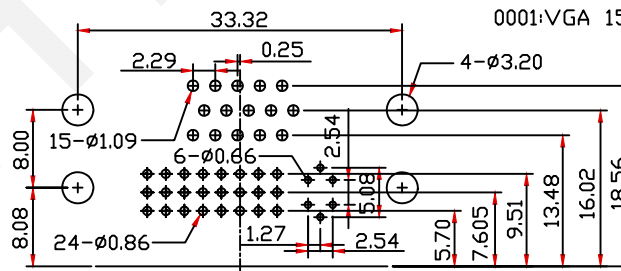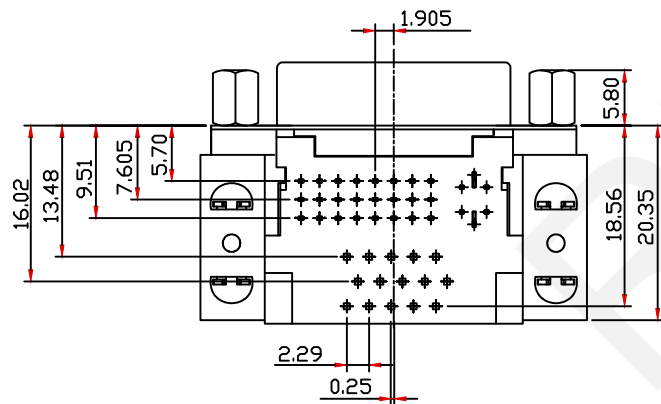

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05mm

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

D-SUB Connector,Stacked type
VGA Female+DVI 24+5 Female

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY19-0001