

RECOMMENDED PCB LAYOUT  
TOLERANCE:±0.05mm


Material:

Housing: PBT+30% Glass Filled, UL94V-0  
 Contacts: Brass, Gold Plating  
 Shell: Steel, Nickel Plating  
 Electrical Characteristics  
 Current Rating: 3AMP  
 Insulator Resistance: 1000MΩ Min. at DC 500V  
 Withstanding Voltage: 500V AC(rms) for 1 Minute  
 Contact Resistance: 20mΩ Max. Initial  
 Operating Temperature: -55°C~+105°C

Order Information

RHTAYE16-09 M-X B

D-SUB Connector,  
 Stacked type  
 Number of Contacts  
 Connector. M-Male  
 PROCESS OPTION  
 A: Rivet Only B: Rivet Lock  
 Housing Color: B-Black E-Green

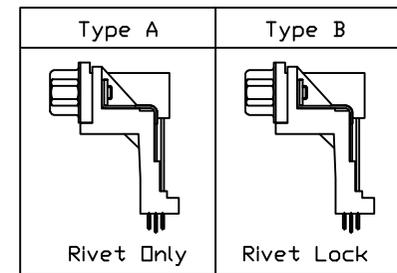

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

D-SUB Connector , 9Pin Male, High Stacked type	
THIRD ANGLE PROJECTION 	RHTAYE16-09M-XB