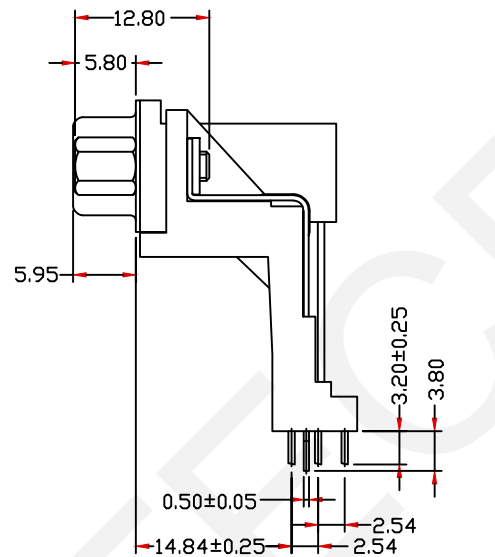
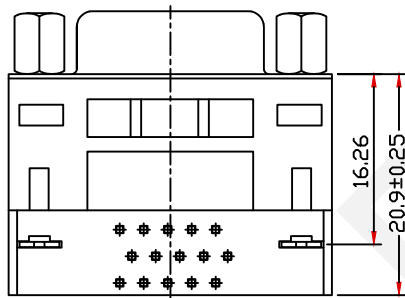
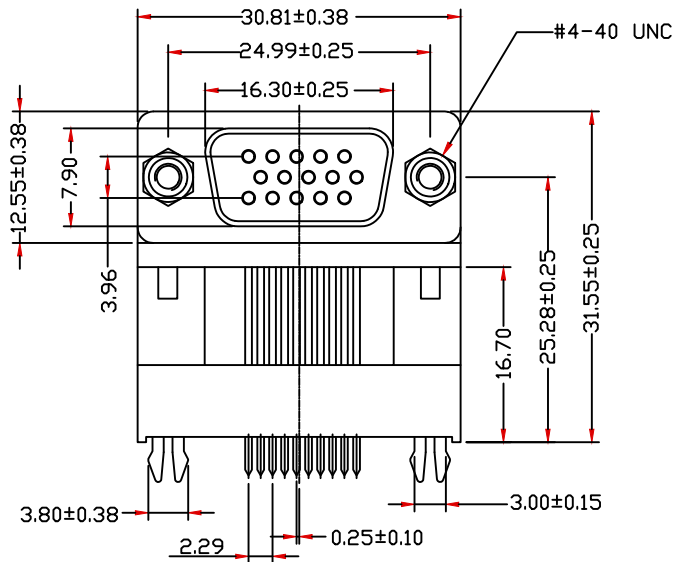


RECOMMENDED PCB LAYOUT
TOLERANCE: $\pm 0.05 \text{ mm}$

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass, Gold Plating

Shell: Steel, Nickel Plating

Electrical Characteristics

Current Rating: 3AMP

Insulator Resistance: $1000 \text{ M}\Omega$ Min. at DC 500V

Withstanding Voltage: 500V AC(rms) for 1 Minute

Contact Resistance: $20 \text{ m}\Omega$ Max. Initial

Operating Temperature: $-55^\circ\text{C} \sim +105^\circ\text{C}$

Order Information

RHTAYE17-15 F-X B

D-SUB Connector,

Stacked type


Number of Contacts

Connector: F-Female

PROCESS OPTION

A: Rivet Only B: Rivet Lock

Housing Color: B-Black L-Blue

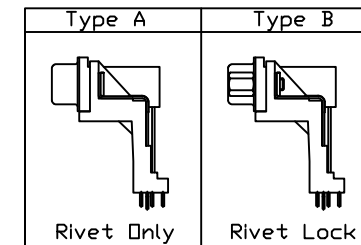

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

D-SUB Connector ,
15Pin Female,High Stacked type

THIRD ANGLE PROJECTION



RHTAYE17-15F-XB