

Material:

Insulator: Glass filled PBT UL94V-0 ,Black

Contacts: Brass or Phosphor Bronze

Plating: Contact Gold And Cutting Tin Over Nickel

Electrical Characteristics:

Current Rating: 2 AMP

Contact Resistance: 30mΩmax. at DC 100mA


Insulator Resistance: 1000MΩmin. at 500V DC

Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute

Operating Temperature: -45°C ~ +105°C

Dimension

Pin	A	B	C
06	13.92	10.52	5.08
08	16.46	13.06	7.62
10	19.00	15.06	10.16
12	21.54	18.14	12.70
14	24.08	20.68	15.24
20	31.70	28.30	22.86
22	34.24	30.84	25.40
24	36.78	33.38	27.94
26	39.32	35.92	30.48
30	44.40	41.00	35.56
36	52.02	48.62	43.18
40	57.10	53.70	48.26
44	62.18	58.78	53.34
50	69.80	66.40	60.96
60	82.50	79.10	73.66
62	85.04	81.64	76.20
72	97.74	94.34	88.90
98	138.38	134.98	129.54

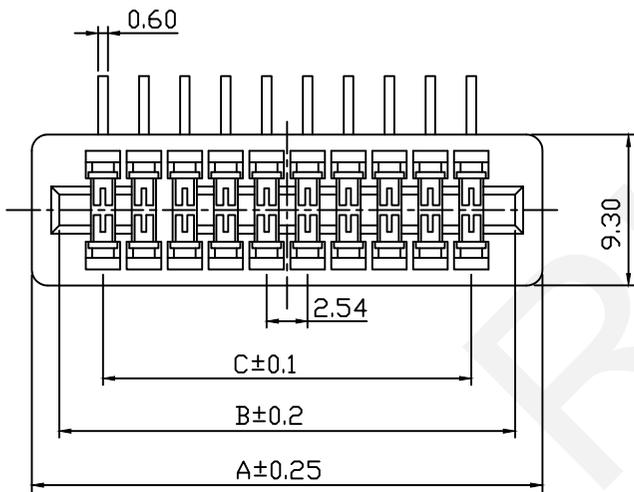

Order Information:

RHTAYF03C-XX-R

XX-No.of 10-100pin


Type:

S-Straight pin

R-Right Angle Pin

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5



CHK'D BY FENG
APPR BY ZHAN



RHTAYF03C-XX-R



NINGBO RHT ELECTRONIC CO.,LTD

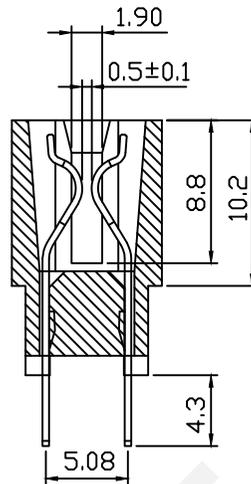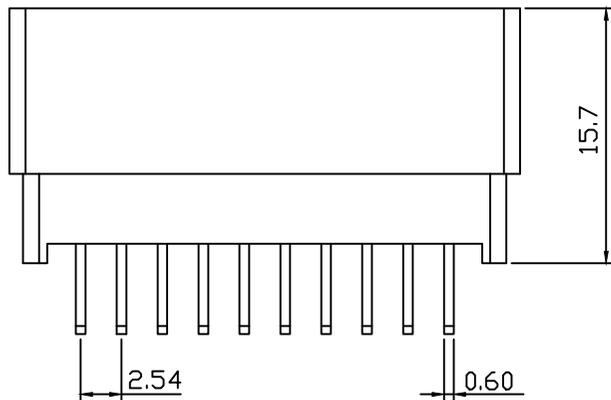

Material:

Insulator: Glass filled PBT UL94V-0 ,Black

Contacts: Brass or Phosphor Bronze

Plating: Contact Gold And Cutting Tin Over Nickel

Electrical Characteristics:

Current Rating: 2 AMP

Contact Resistance: 30mΩmax. at DC 100mA


Insulator Resistance: 1000MΩmin. at 500V DC

Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute

Operating Temperature: -45°C ~ +105°C

Dimension

Pin	A	B	C
06	13.92	10.52	5.08
08	16.46	13.06	7.62
10	19.00	15.06	10.16
12	21.54	18.14	12.70
14	24.08	20.68	15.24
20	31.70	28.30	22.86
22	34.24	30.84	25.40
24	36.78	33.38	27.94
26	39.32	35.92	30.48
30	44.40	41.00	35.56
36	52.02	48.62	43.18
40	57.10	53.70	48.26
44	62.18	58.78	53.34
50	69.80	66.40	60.96
60	82.50	79.10	73.66
62	85.04	81.64	76.20
72	97.74	94.34	88.90
98	138.38	134.98	129.54

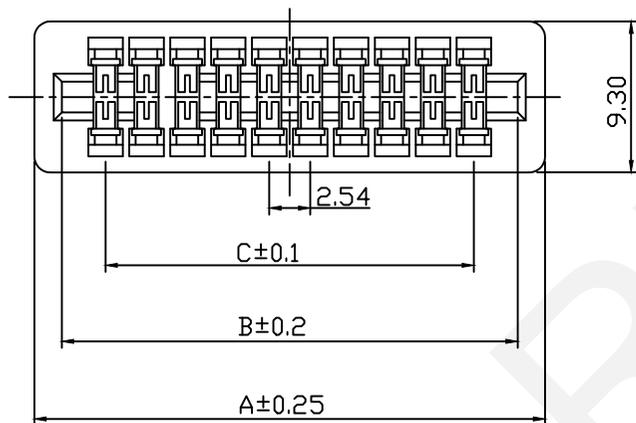

Order Information:

RHTAYF03C-XX-S

XX-No.of 10-100pin

Type:

S-Straight pin

R-Right Angle Pin

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

2.54mm Pitch Edge Card Connector Slot PCB Dip 180 Type	
THIRD ANGLE PROJECTION	RHTAYF03C-XX-S



NINGBO RHT ELECTRONIC CO.,LTD