
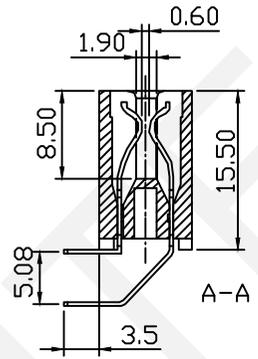


Order Information  
**RHTAYF03D-XX-R**


03D-With Ear  
 XX-No.of 12-100pin  
 Type:S-Straight pin  
 R-Right Angle Pin

Dimension

Contact no	A	B	C	D
24	51.69	45.09	33.22	27.94
44	77.09	70.49	58.62	53.34
48	82.17	75.57	63.70	58.42
50	84.71	78.11	66.24	60.96
56	92.33	85.73	73.86	68.58
60	97.41	90.81	78.94	73.66
70	110.11	103.51	91.64	86.36
72	112.65	116.06	94.18	88.90
76	130.43	123.83	111.96	106.68
88	133.17	126.57	114.50	109.22
100	148.21	141.61	129.74	124.46

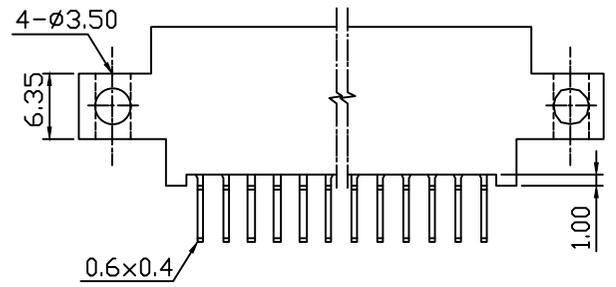

Material:  
 Insulator:Glass filled PBT UL94V-0  
 Contacts:Brass or Phosphor Bronze  
 Plating>Contact Gold And Dip Tin Over Nickel

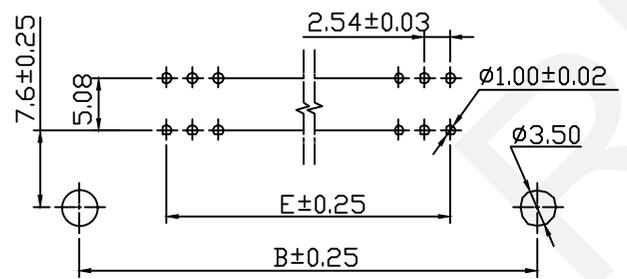

Electrical Characteristics:  
 Current Rating: 2 AMP  
 Insulator Resistance: 1000M Ωhm min. at 500V DC  
 Contact Resistance: 30m Ωhm max. at DC 100mA  
 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute  
 Operating Temperature: -45°C ~ +105°C




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG  
 APPR BY ZHAN

2.54mm Pitch Edge Card  
 Connector Slot PCB Dip 90 Type  
 THIRD ANGLE PROJECTION  
 RHTAYF03D-XX-R


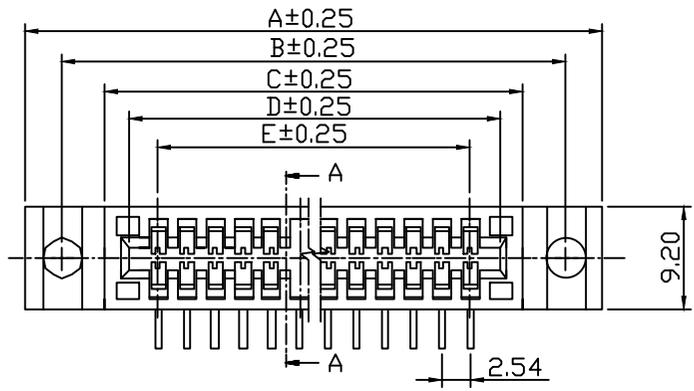


Order Information  
RHTAYF03D-XX-S

03D-With Ear  
XX-No.of 12-100pin  
Type:S-Straight pin  
R-Right Angle Pin

Dimension

Contact no	A	B	C	D
24	51.69	45.09	33.22	27.94
44	77.09	70.49	58.62	53.34
48	82.17	75.57	63.70	58.42
50	84.71	78.11	66.24	60.96
56	92.33	85.73	73.86	68.58
60	97.41	90.81	78.94	73.66
70	110.11	103.51	91.64	86.36
72	112.65	116.06	94.18	88.90
76	130.43	123.83	111.96	106.68
88	133.17	126.57	114.50	109.22
100	148.21	141.61	129.74	124.46

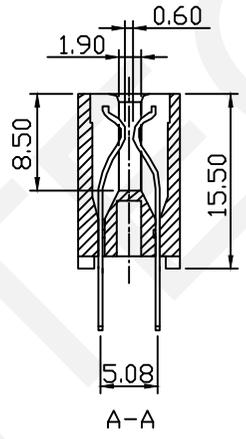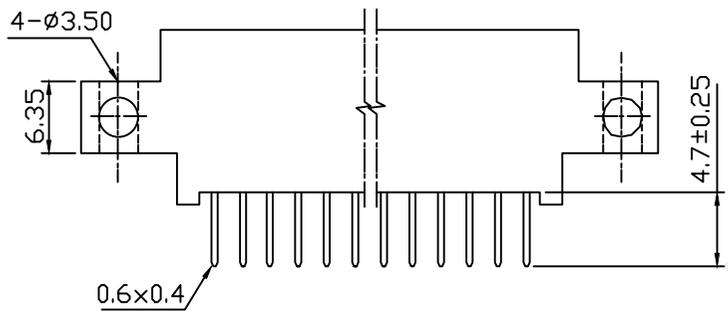

Material:

Insulator:Glass filled PBT UL94V-0

Contacts:Brass or Phosphor Bronze

Plating>Contact Gold And Dip Tin Over Nickel

Electrical Characteristics:


Current Rating: 2 AMP

Insulator Resistance: 1000M Ohm min. at 500V DC

Contact Resistance: 30m Ohm max. at DC 100mA


Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute

Operating Temperature: -45°C ~ +105°C

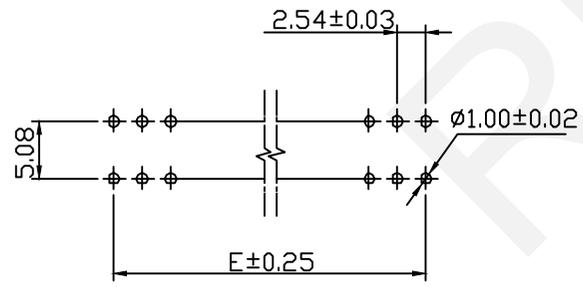

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	2.54mm Pitch Edge Card Connector Slot PCB Dip 180 Type	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAYF03D-XX-S



RHTAYF03D-XX-S