
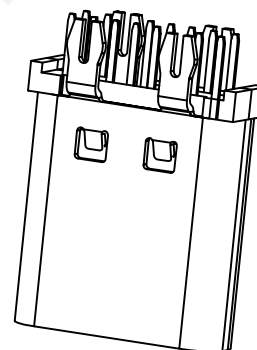
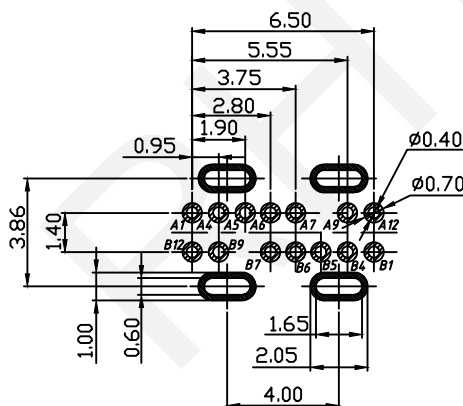
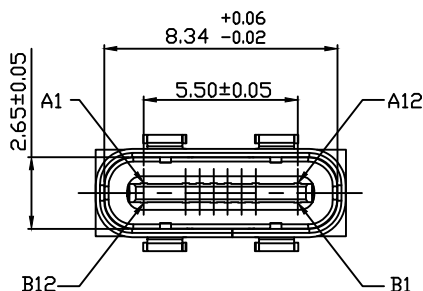
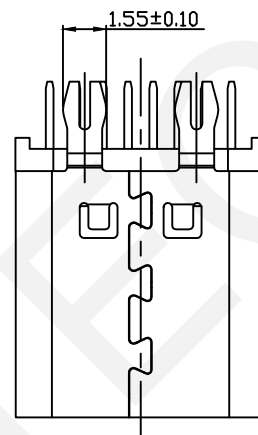
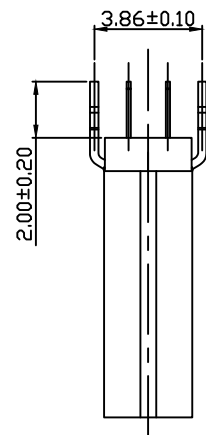


A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-		VBUS			GND
GND			VBUS		D-	D+	CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

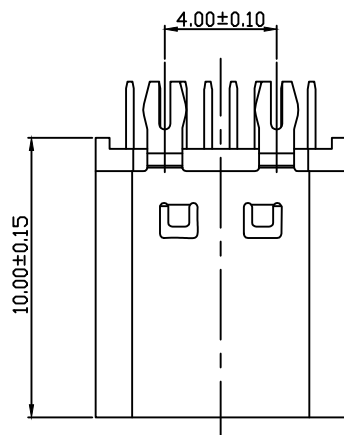

Material:

- 1.Terminal:C7025 f=0.15mm
- 2.Middle clip:SuS301 T=0.15mm
- 3.Shell:SUS304 T=0.3mm
- 4.Plastic Cement:LCP,30%6FBlack

Finish:

- 1.Terminal:Contact 1u"Gold Platde
- Welding area G/F Plated
- 2.Shell:80u"Ni Plated

Electrical

- Current rating:5.0A
Contact Resistance:40mΩ Max
Insulation Resistance:150V DC100MΩ Min.
Withstanding Voltage:100V AC/1mA Max

Mechanical:

- Insertion Force:5~20N
Pull out Force:8~20N
Mechanical Life:10000 Cycles
Operating Temperature:-55°C~+85°C

Note:

- 1.Salf spray test: Through 48H salt spray test at the concentration of 5±1% salt water, no rust phenomenon.
- 2.SMT reflow soldering(peah value260°C±5°C) can not blister, melt glue and discolor



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

Type C Female 14
Pin DIP Vertical L=10.0mm

THIRD ANGLE PROJECTION



RHTAY459