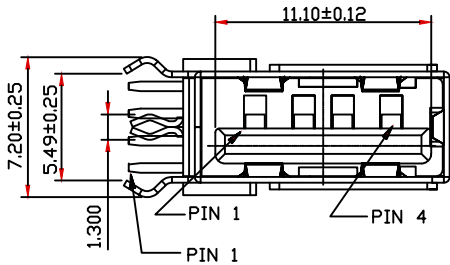
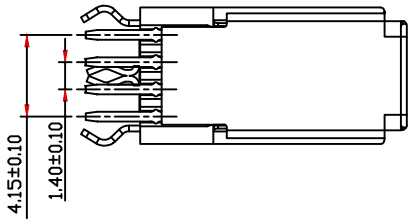
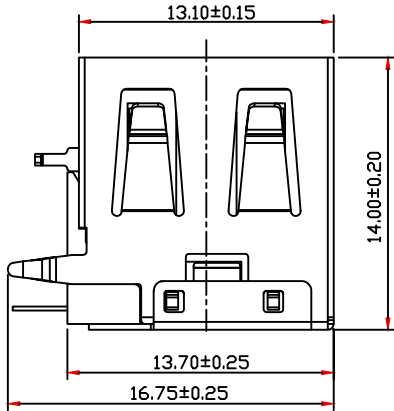






	1	2	3	4	5	6	7	8	9
A									
B							Material Housing:Hing Temperature Thermoplastic, UL94V-0 PBT,Black/White. Contact:Copper Alloy C2680 Shell:Copper Alloy C2680/SPCC		
C							Finish: Contact:Plated Gold In Mating Area;Tin On Solder Tails Shell:Nickel Plating		
D							Electrical: Current Rating:1.5A/Contact Terminal. Voltage Rating:30V DC Contact Resistance:30mΩ Max. Dielectric Withstanding Voltage:500 V AC AT Sea Level. Insulation Resistance: 1000MΩ Min. Connector Mate And Unmated Force Mate Force:3.75kgf Max. Unmated Force:1.02kgf Min. Terminal Retention:1.2kgf Min		
E	RECOMMENDED PCB LAYOUT						Order Information RHTAY814-B		
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	CONN COM TYPE A USB Female R/A	
				0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	
	1	2	3	4	5	6	7	8	9