



	1	2	3	4	5	6	7	8	9
A									A
B									B
C									C
D									D
E									E
F									F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	CONN PLUG USB B-MALE SOLDER THIRD ANGLE PROJECTION 	RHTAY92-X	G
	1	2	3	4	5	6	7	8	9

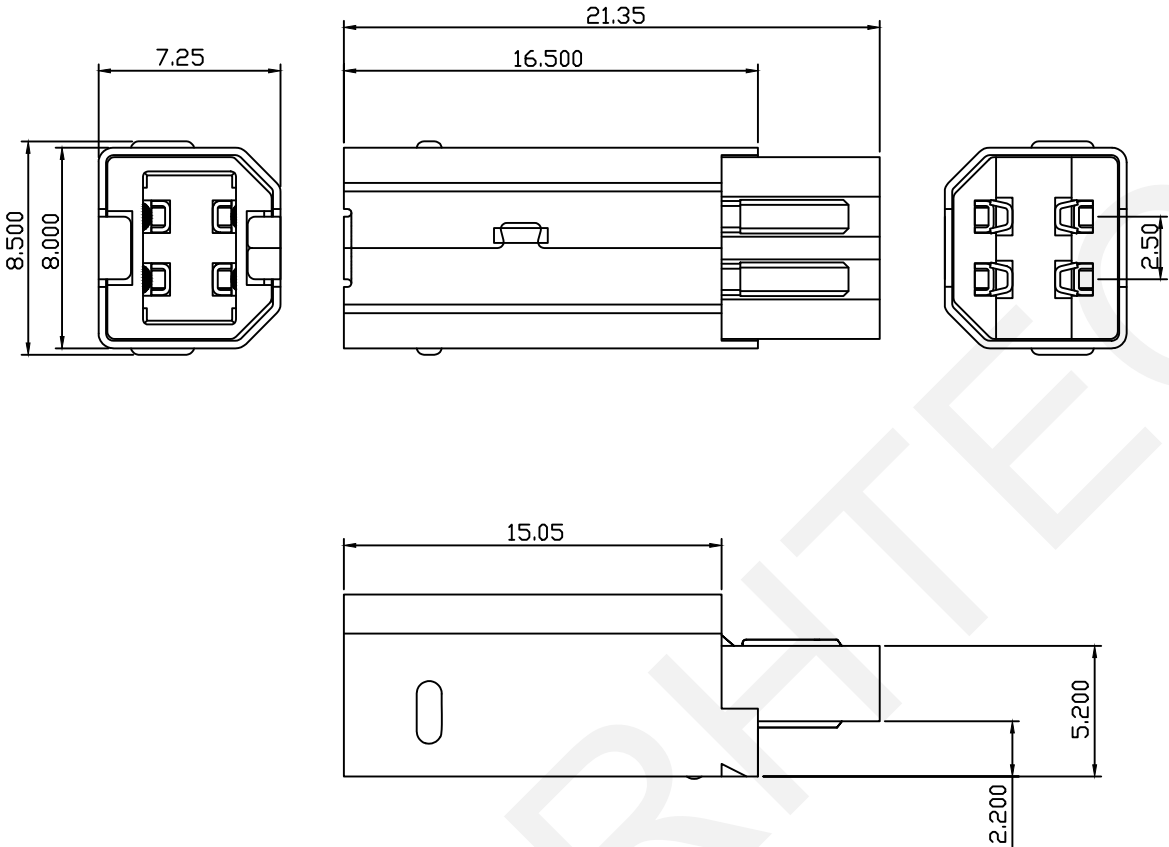

Material
Housing:Hing Temperature Thermoplastic,
UL94V-0 PBT/LCP,Black/White.
Contact:Copper Alloy C2680
Shell:Copper Alloy C2680/SPCC

Finish:
Contact:Plated Gold In Mating Area;Tin On Solder Tails
Shell:Nickel Plating

Electrical:
Current Rating:1.5A/Contact Terminal.
Voltage Rating:30V DC
Contact Resistance:30mΩ Max.
Dielectric Withstanding Voltage:500 V AC AT Sea Level.
Insulation Resistance: 1000MΩ Min.
Connector Mate And Unmated Force
Mate Force:3.75kgf Max.
Unmated Force:1.02kgf Min.
Terminal Retenion:1.2kgf Min

Order Information
RHTAY92-B
CONN USB 2.0
Color:W=White B=Black