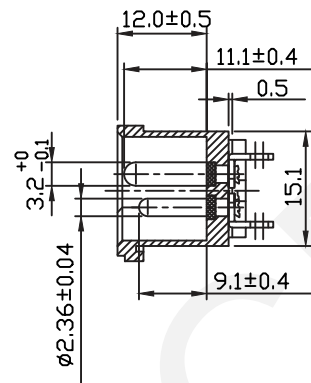
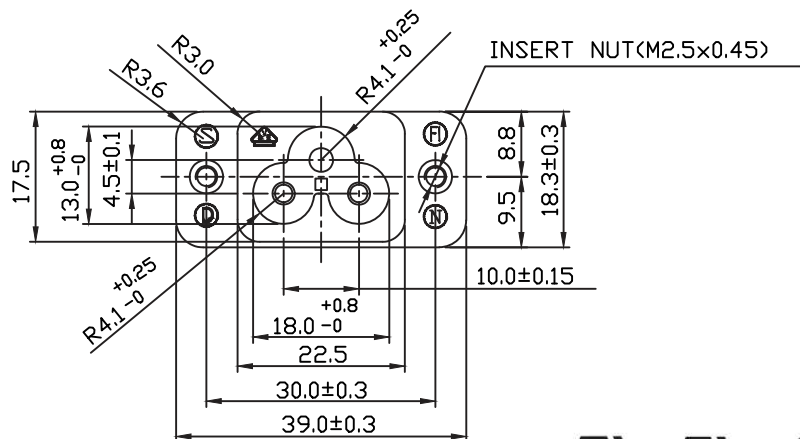


SPECIFICATION:

Standard: IEC 60320 C6

Voltage Rating: 250V AC

Rating: 2.5A 250V AC

Insulation Resistance: 100MΩ 500V DC/1 Minute

Dielectric Strength: 2000V AC/1 Minute

Temperature Range: -45°C~+105°C

Material:



Housing Material: PBT UL94V-0 or PA66/PC UL94V-0

Terminal: Brass ,plating Ni.

ORDER INFORMATION

Product NO.: RHTAYS-111-01

AC INLET Series

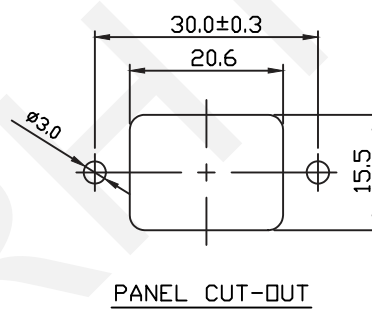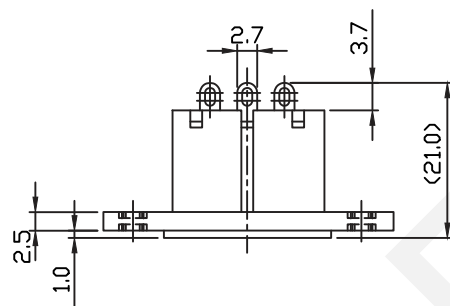

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

C6 AC INLET Series

THIRD ANGLE PROJECTION



RHTAYS-111-01