
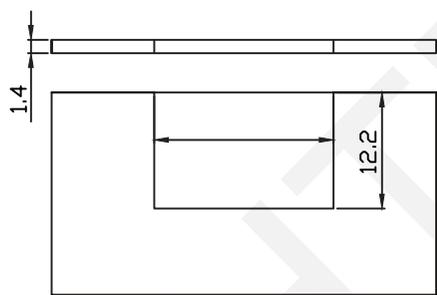



A-A

SPECIFICATION:
 Standard: IEC 60320 C8
 Voltage Rating: 250VAC
 Rating: 250VAC 10A (2.5A)
 Insulation Resistance: 100MΩ 500V DC/1 Minute
 Dielectric Strength: 2000V AC/1 Minute
 Temperature Range: -45°C~+105°C

Material:
 Housing Material: PBT UL94V-0 or PA66/PC UL94V-0
 Terminal: Brass ,plating Ni.



PANEL CUT-OUT



ORDER INFORMATION
 Product NO: RHTAYS-222-1

AC INLET TYPE

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

C8 AC INLET Series

THIRD ANGLE PROJECTION

RHTAYS-222-1