


A-A



SPECIFICATION:

Standard: IEC 60320 C8

Voltage Rating: 250VAC

Rating: 250VAC 10A (2.5A)

Insulation Resistance: 100MΩ 500V DC/1 Minute





Dielectric Strength: 2000V AC/1 Minute

Temperature Range: -45°C~+105°C

Material:

Housing Material: PBT UL94V-0 or PA66/PC UL94V-0

Terminal: Brass ,plating Ni.

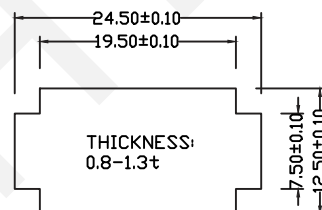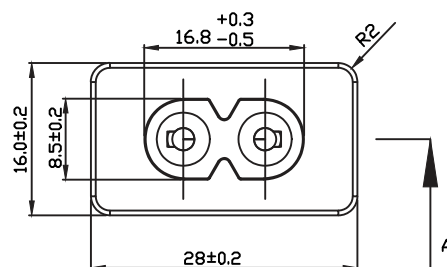

PANEL CUT-OUT

ORDER INFORMATION

Product NO.: RHTAYS-222-5

AC INLET TYPE

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

C8 AC INLET Series

THIRD ANGLE PROJECTION



RHTAYS-222-5