
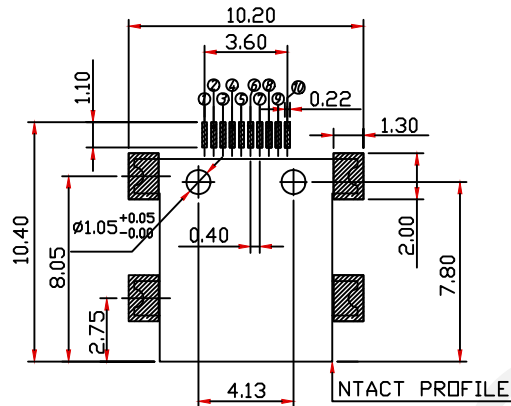
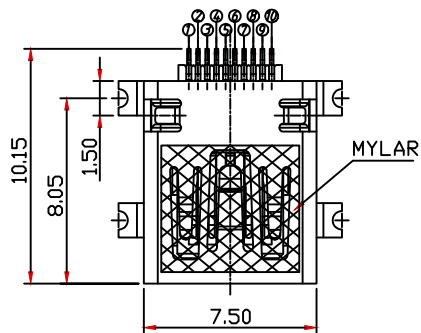
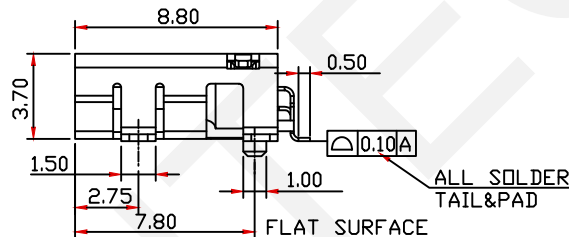


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ± 0.05



Material

Housing: THERMOPLASTIC, UL94V-0

Shield: Copper Alloy, Tin Plated

Terminal: Copper Alloy, Contact: Au Plated

Electrical

Insulator Resistance: 1000M Ω Min

Contact Resistance: 80m Ω Max

Withstanding Voltage: 500V AC 1 minute


Order Information

RHTAY29-10FA-B

Model

Serial number

Color: B=Black



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

MINI USB 0.4mm 10P Female SMT

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTAY29-10FA-B-R