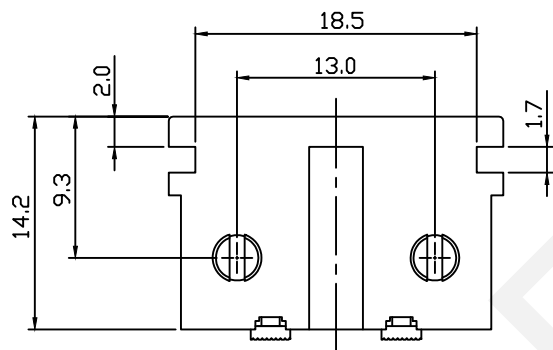
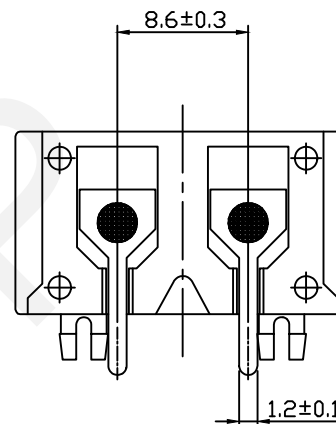
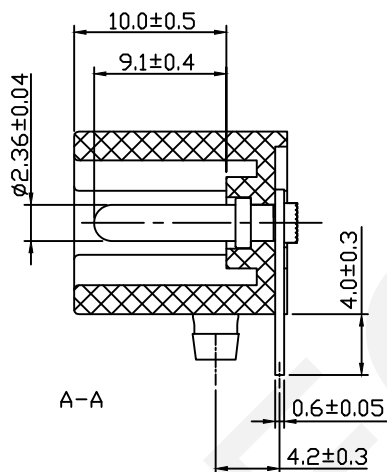
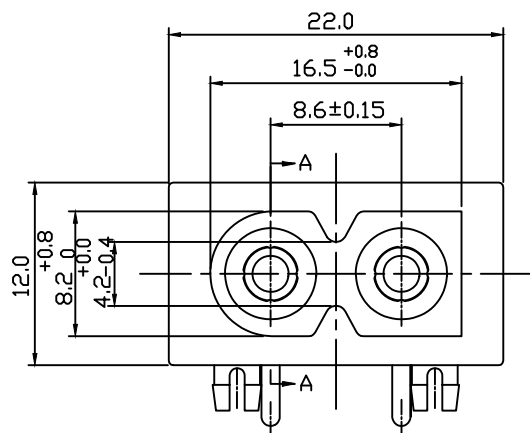


PCB LAYOUT

Material:

Material(External): Nylon66,94V-2-0

Electrical Characteristics:

Rating:5A 250V AC T105 UL cUL/2.5A 250V AC VDE 3C KC

Insert And Extract Force:1.36kgf~6.8kgf

Terminal Strength:≥80N

Operating Life:≥5000 cycles

Withstand Voltage:

Between all terminals:2500VAC(50-60Hz)/min

Terminals to base:3750V AC(50-60Hz)/min

Leakage Current:1mA

Insulation Resistance:≥100MΩ 500V DC



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

AC Power SocketsxAC PlugS

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAYS-222-17


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9